


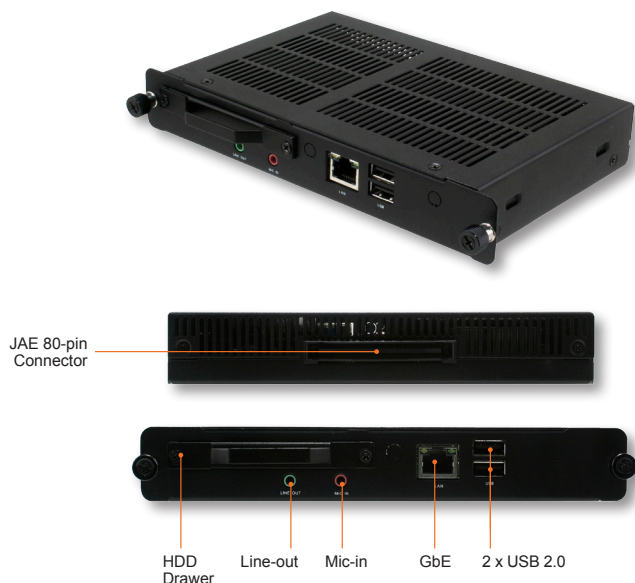

Features

- Intel® rPGA988 Socket(Socket G2) 2nd/3rd Generation Core™ i7/i5/i3, Pentium® and Celeron® Processors (Max TDP 35W)
- Intel® HM65 Express Chipset
- One 204-Pin DDR3 1333/ 1066 Non-ECC SO-DIMM, Up to 8GB
- 1 x Realtek RTL8111E PCI-Express Gigabit Ethernet
- 1 x Half size Mini PCI-e socket
- 1 x 2.5" Drive Bay (7mm)
- 2 x USB 2.0 type A, 1 x Line-Out, 1 x Mic-In

Specifications

Component

Board	EPIC board with Intel® HM65 Express Chipset
Processor	Intel® rPGA988 Socket(Socket G2) 2 nd /3 rd Generation Core™ i7/i5/i3, Pentium® and Celeron® Processors (Max TDP 35W)
System Chipset	Intel® HM65 Express Chipset
System Memory	1 x 204-Pin DDR3 1333MHz SO-DIMM up to 8 GB or 204-Pin DDR3 1066MHz SO-DIMM

Expansion & Storage

Expansion	1 x Half size Mini PCI-e socket
Storage	1 x 2.5" Drive Bay (7mm)

I/O

USB	2 x USB 2.0
Other	2 x SMA Connector

Display

Chipset	Intel® 2 nd /3 rd Generation CPU integrated
----------------	---

Audio

Audio Codec	Realtek ALC661 supports 2-CH
Audio Interface	Mic-In and Line-Out

Ethernet

Chipset	1 x Realtek 8111E
Ethernet Interface	10/100/1000 Base-Tx GbE compatible

Power Requirement

Power Connector	The 80-pin right angle blind mate plug connector (p/n: TX25-80P-LT-H1E)
Power Requirement	+12~19V (from monitor)
Power Type	ATX

Mechanical & Environmental

Construction	Metal
Dimension	200 x 119 x 30mm
Operating Temperature	(w/HDD), ambient w/ air flow 0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-20 ~ 75°C (-4 ~ 167°F)
Operating Humidity	0 ~ 90% Relative Humidity, Non-condensing

Ordering Information

SOPM-HM65-A1R

Intel® 2nd/3rd Generation Core™ Open Pluggable Specification (OPS) Digital Signage Player with Intel® Express HM65 Chipset