

5






NOTE :
1.材質:AL6063
2.⊕為重點檢驗尺寸(8pcs)


Avalue	L= XX	a= XX	b= XX
Vender: XX	L= XX	a= XX	b= XX
$\Delta E \leq XX$	$XX \leq \Delta L, \Delta a, \Delta b \leq XX$		

GENERAL TOL.	A	B
>0	±0.1	±0.1
>10	±0.1	±0.2
>50	±0.15	±0.3
>200	±0.3	±0.5
>500	±0.5	±0.8
ANGLE TOL. ±0.5°		

AX

材 質	鐵件	鋁件	塑膠件
扭拉力			
扭拉值(kgf/cm)	6	4	6
拉力值(kgf)	15	8	15

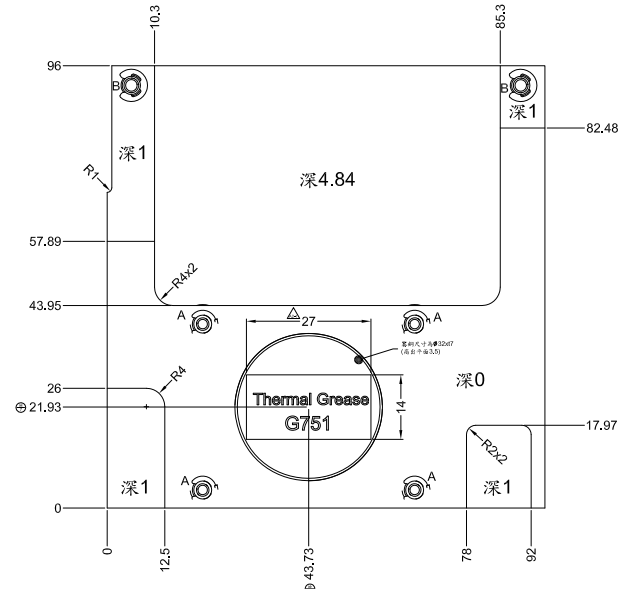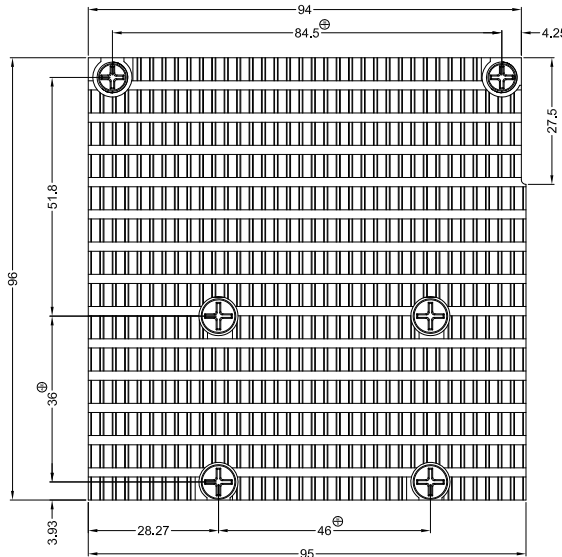

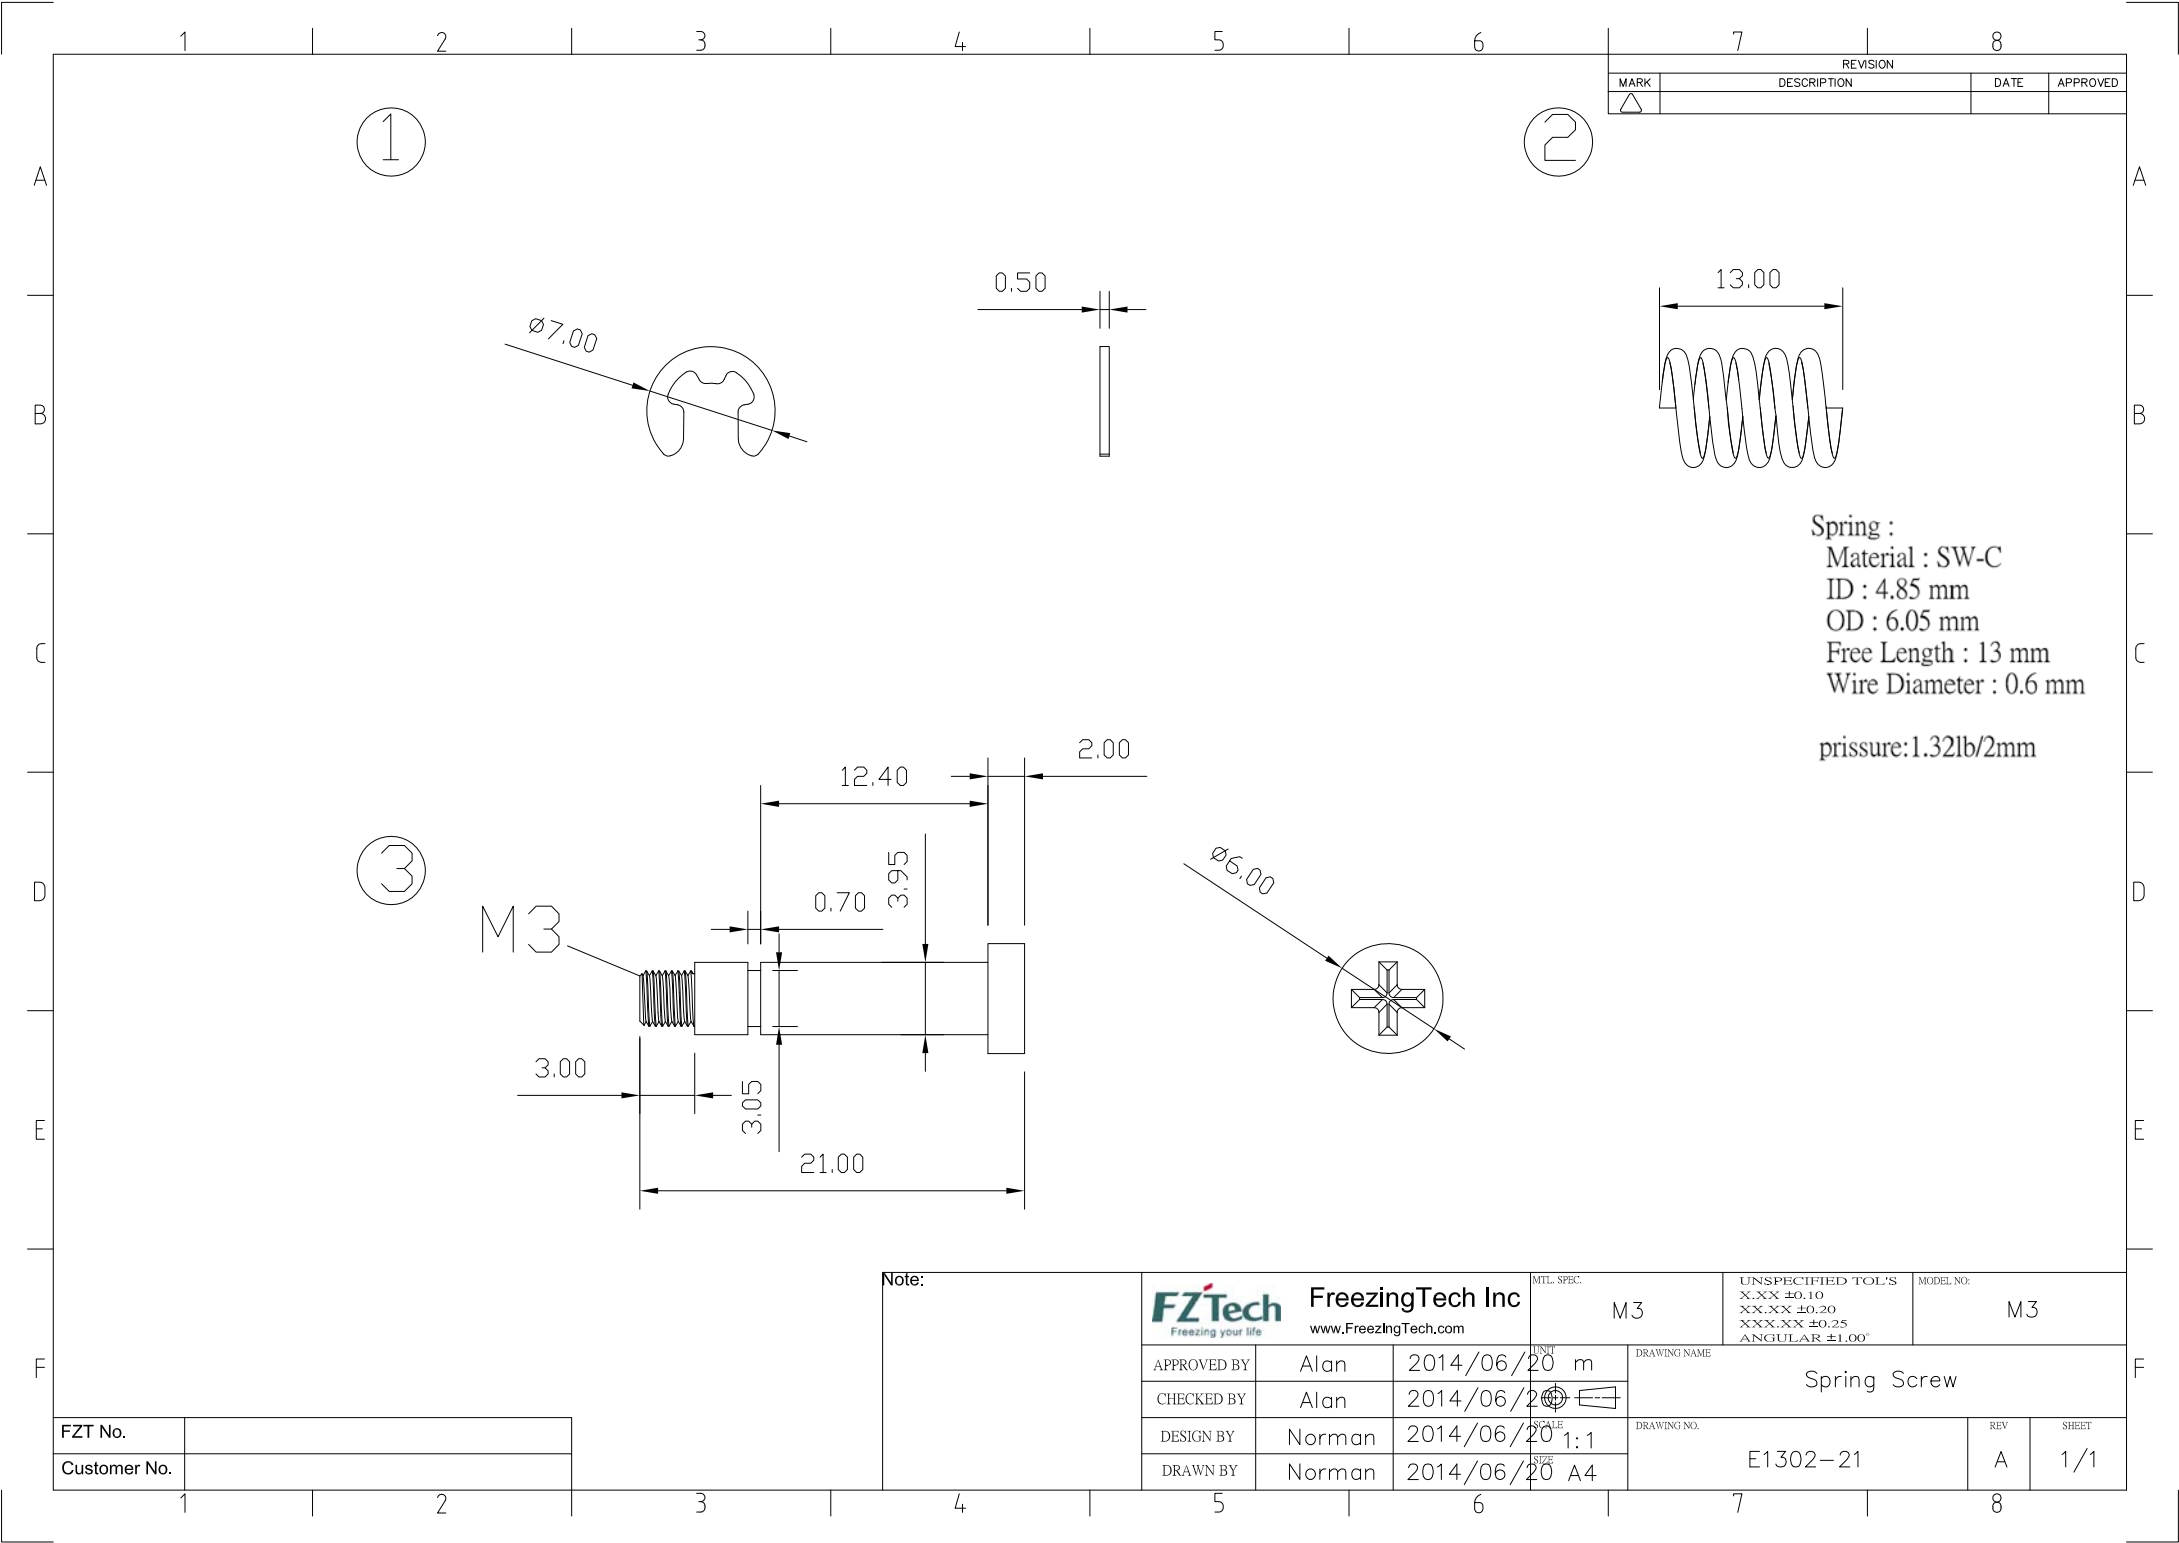

REVISION			
MARK	DESCRIPTION	DATE	APPROVED
△			

Spring :
Material : SW-C
ID : 4.85 mm
OD : 6.05 mm
Free Length : 13 mm
Wire Diameter : 0.6 mm
prissure:1.32lb/2mm

Note:

FZTech FreezingTech Inc www.FreezingTech.com			MTL. SPEC. M3	UNSPECIFIED TOL'S X.XX ±0.10 XX.XX ±0.20 XXX.XX ±0.25 ANGULAR ±1.00°	MODEL NO. M3
APPROVED BY	Alan	2014/06/20	UNIT mm	DRAWING NAME Spring Screw	
CHECKED BY	Alan	2014/06/20	SCALE 1:1	DRAWING NO. E1302-21	
DESIGN BY	Norman	2014/06/20	SIZE A4	REV A	SHEET 1/1
DRAWN BY	Norman	2014/06/20			

FZT No.	
Customer No.	

[illegible]