



FAQ / Application Note

Subject : How to connect 2.5" and 3.5" HDD ?

FAQ Document No: G08006

Date: 2008/08/16

Model No. All

Rev. A1

Category: General H/W S/W Others, _____

Purpose :

Use special cable to connect 2.54" HDD on boards with 2.54 pitch connector, or 3.5" HDD on boards with 2.00 pitch connector.

There are two types of HDD connector on our boards.


1, 2.00pitch, 44pins

2, 2.54pitch, 40pins


There will be four combinations, shown some suitable cables below.

1, to connect 2.54" HDD on boards with 2.54 pitch connector

Part number: E1701440451R

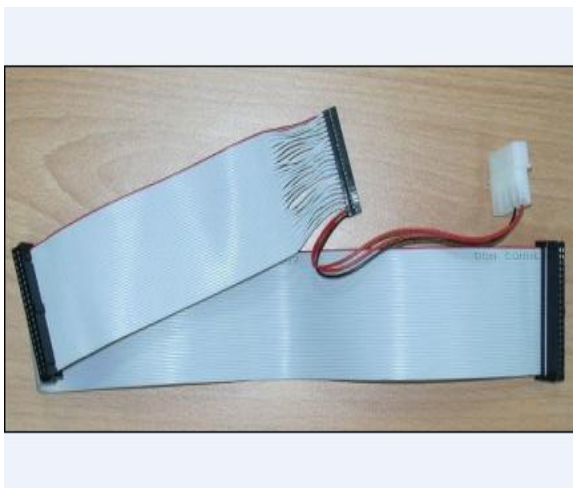

Part number: E1701880221R

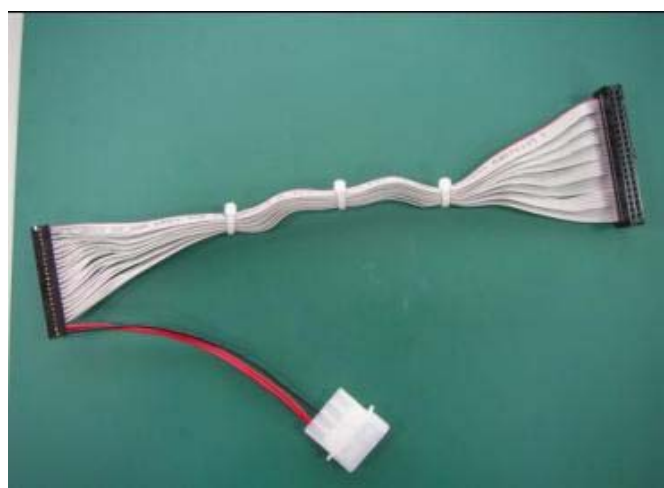

Avalue Technology Inc.

www.avalue.com.tw



Headquarters: Tel: 886-2-8226-2345
Europe office: Tel: 45-7025-0310
US office: Tel: 1-732-578-0200
China office: Tel: 86-21-5426-3399

Fax: 886-2-8226-2777
 Fax: 1-732-578-0250
 Fax: 86-21-6495-0370



Email: sales@avalue.com.tw
 Email: sales.europe@avalue.com.tw
 Email: sales@avalue-usa.com
 Email: sales.china@avalue.com.tw



2, to connect 2.5" HDD on boards with 2.00 pitch connector

Part number: E1701440504R	Part number: E1701440120R
	

3, to connect 3.5" HDD on boards with 2.54 pitch connector

Part number: E1701C00450R	Part number: E1701800100R
	



4, to connect 3.5" HDD on boards with 2.00 pitch connector

Part number: E1701C40450R	Part number: E1701440150R
	

Avalue Technology Inc.

www.avalue.com.tw

Headquarters: Tel: 886-2-8226-2345
Europe office: Tel: 45-7025-0310
US office: Tel: 1-732-578-0200
China office: Tel: 86-21-5426-3399

Fax: 886-2-8226-2777
 Fax: 1-732-578-0250
 Fax: 86-21-6495-0370

Email: sales@avalue.com.tw
 Email: sales.europe@avalue.com.tw
 Email: sales@avalue-usa.com
 Email: sales.china@avalue.com.tw