

# Agile Line Series Products

Value-Packed Quality, Lightning fast Delivery  
Powered by 11th Intel® Core™ Processor

Avalue introduces the Agile Line series products, powered by 11th Intel® Core™ Processor to achieve optimal performance with minimum power consumption. Agile Line products come with amazingly speedy delivery and superior product quality. This series products can significantly shorten the delivery time with shipments within 5 days of order receipt and enjoy a 3-year life cycle guarantee, which enable customers to seize market opportunities and respond in time.

## Speedy

Ready-to-ship inventory  
Ship within 5 days of  
order receipt

## Quality

Low power  
consumption with  
optimizing performance

## Efficiency

Competitive TCO  
Full service logistics  
from shipping to RMA

## Warranty

High stand verification  
and validation



## KIOSK

Reliability & Durability  
Versatile Connectivity  
Security & Stability



## HMI

Time-to-market  
Highly Integration  
Low Power Consumption



## Signage

Versatile Connectivity  
Low Power Consumption



## Gaming

Versatile Connectivity  
Security & Stability





## ARC-1738-C

11th Generation Intel® Core™ i5/i3 Processors  
17" Fanless Rugged Multi-Touch Panel PC


- 1 x 2.5GbE, 1 x 1GbE
- 4 x USB3.2 Gen 2, 3 x COM, 2 x DP++ Output
- 1 x 2.5" SATA HDD/SSD Storage
- 1 x M.2 Key-B for 5G Module or Storage, 1 x M.2 Key-E for WIFI
- DC in +12~24V, 120W Power Adapter
- Onboard TPM2.0



## APC-2138

11th Generation Intel® Core™ i5/i3 Processors  
21.5" Expandable Ultra Light Multi-Touch Fanless Panel PC


- 1 x 2.5GbE, 1 x 1GbE
- 4 x USB 3.2 Gen 2
- 1 x 2.5" SATA HDD/SSD Storage
- 1 x M.2 Key-B for WWAN or SSD, 1 x M.2 Key-E for WIFI
- DC in +12~24V
- Front IP65 Waterproof Protection

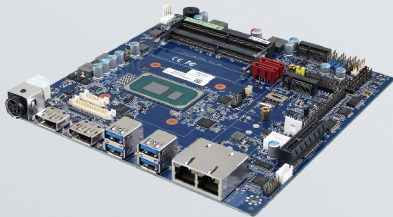

## EMX-TGLC

11th Generation Intel® Core™ i5/i3 Processors  
Thin Mini ITX Motherboard

- Triple Display: 2 x DP++, 1 x 2CH LVDS or eDP
- 1 x 2.5GbE, 1 x 1GbE
- Expansion Slot: 1 x M.2 Key-B, 1 x M.2 Key-E
- 2 x RS-232/422/485, 4 x RS232
- TPM 2.0, 16-bit GPIO
- DC in +12~24V

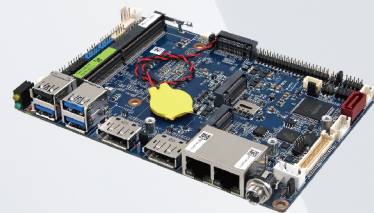

## ECM-TGUC

11th Generation Intel® Core™ i5/i3 Processors  
3.5" Micro Module

- Triple Display: 2 x DP++, 1 x 2CH LVDS or eDP
- 1 x 2.5GbE, 1 x GbE
- Expansion Slot: 1 x M.2 Key-B, 1 x M.2 Key-E, 1 x M.2 Key-M
- 1 x RS-232/422/485, 5 x RS232
- TPM 2.0, 8-bit GPIO
- DC in +12~24V



## ACS10-TGU

11th Generation Intel® Core™ i5/i3 Processors Compact System

- Powerful & Low Power Processor
- No Vents, No Dust Accumulation
- No Fan, No Maintenance Cost
- Industrial Quality, 7day, 24 hours Reliable
- Compact Size, 180 x 120 x 48mm
- Passive Cooling, 0°C ~ 50°C

