


E-ink Solution

- Pick to Light
- Bedside Card
- E-Note

Information System Infrastructure

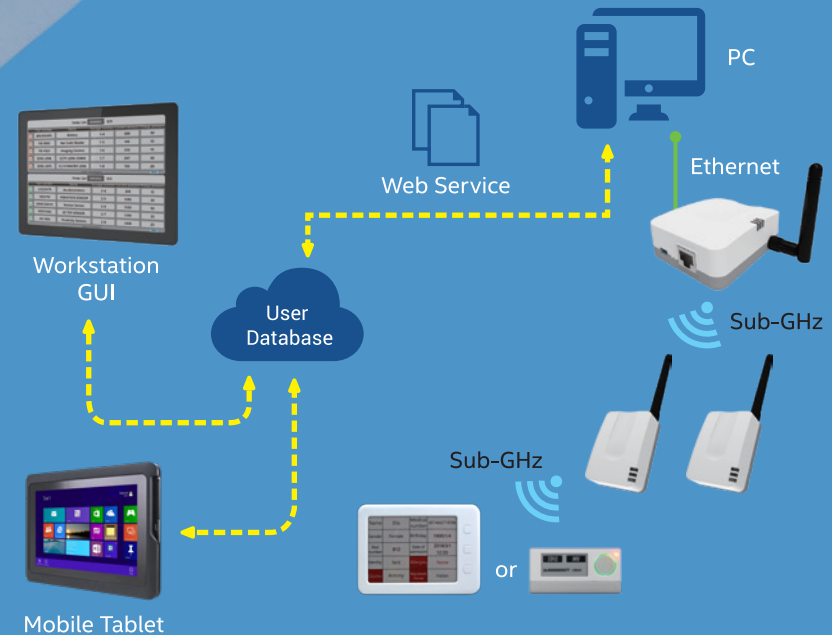

Capacity

1 AP



15 RT



15,000 Tag

Sub-GHz Access Point & Router

AP



- Bridging between TCP/IP and Sub-GHz Network
- Compact size (smallest footprint)
78 x 68 x 30.3mm (L x W x H)
- Weight: 84g
- 5VDC-powered (mini USB)
- Manage 15 Routers

RT



- Forwarding Data to Tag
- Flexible Network Expansion
- Double wireless coverage
- Solving dead zone issue
- Compact size
68.5 x 49 x 33mm (L x W x H)
- Weight: 60g
- 5VDC-powered (mini USB)
- Manage 1000 Tags

● E-Note

- Extremely thin and light
- High-Contrast Display
- Up to three weeks use on a single charge
- Convenient tool for writing, highlighting, erasing
- Familiar letter-size

- 13.3" EPD
- Freescale iMX6 Solo Lite
- 16 Grey Level
- 1600 x 1200 pixels
- 4GB eMMC
- Capacitive + Digitizer w/Stylus
- WiFi 802.11 b/g/n
- 1500mAh Battery
- Support SDHC up to 32GB
- Weight 420g
- 233 x 310 x 6.6 mm

● Bedside Card

- Patient info
- Instant status
- Multiple pages
- Mobility with bed
- Green technology

- E-Ink Color B/W/R
- Size 159 x 113 x 15 mm
- Weight 70g
- Display area 114.9 x 85.8 mm
- Resolution 600 x 448
- 3 buttons for page up/confirm/page down
- Front IP65
- Operating Frequency: 915MHz
- Power supply
AAAA Alkaline batteries x 4

● Pick to Light

- Reliable wireless system for easy expansion
- Ultra low power consumption
- fast response time
- Tri-color LED design for multi-task applications
- Easy battery replacement
- Wireless solution brings easy installation

- E-Ink tag B/W
- Size 95 x 48 x 15.8 mm
- Weight 35g
- Display area 48.1 x 23.4 mm
- Resolution 212 x 104
- Operating Frequency: 915MHz
- Power supply
CR2450 batteries x 2
AAA Alkaline batteries x 2
- Tri-color slick push button (Green, blue, red)
Single color pick LED (red)