

BAX-P501-Q170

ATX Barebone System with Intel® Q170 Chipset

Quick Reference Guide

1st Ed –28 October 2016

Copyright Notice

Copyright © 2016 Avalue Technology Inc., ALL RIGHTS RESERVED.

FCC Statement



THIS DEVICE COMPLIES WITH PART 15 FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:

- (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE.
- (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

THIS EQUIPMENT HAS BEEN TESTED AND FOUND TO COMPLY WITH THE LIMITS FOR A CLASS "B" DIGITAL DEVICE, PURSUANT TO PART 15 OF THE FCC RULES.

THESE LIMITS ARE DESIGNED TO PROVIDE REASONABLE PROTECTION AGAINST HARMFUL INTERFERENCE WHEN THE EQUIPMENT IS OPERATED IN A COMMERCIAL ENVIRONMENT. THIS EQUIPMENT GENERATES, USES, AND CAN RADIATE RADIO FREQUENCY ENERGY AND, IF NOT INSTALLED AND USED IN ACCORDANCE WITH THE INSTRUCTION MANUAL, MAY CAUSE HARMFUL INTERFERENCE TO RADIO COMMUNICATIONS.

OPERATION OF THIS EQUIPMENT IN A RESIDENTIAL AREA IS LIKELY TO CAUSE HARMFUL INTERFERENCE IN WHICH CASE THE USER WILL BE REQUIRED TO CORRECT THE INTERFERENCE AT HIS OWN EXPENSE.

Copyright Notice

Copyright © 2016 Avalue Technology Inc., ALL RIGHTS RESERVED.

No part of this document may be reproduced, copied, translated, or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the prior written permission of the original manufacturer.

Disclaimer

Avalue Technology Inc. reserves the right to make changes, without notice, to any product, including circuits and/or software described or contained in this manual in order to improve design and/or performance. Avalue Technology assumes no responsibility or liability for the use of the described product(s), conveys no license or title under any patent, copyright, or masks work rights to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified. Applications that are described in this manual are for illustration purposes only. Avalue Technology Inc. makes no representation or warranty that such application will be suitable for the specified use without further testing or modification.

CONTENT

- 1. Getting Started4**
 - 1.1 Safety Precautions4
 - 1.2 Packing List4
 - 1.3 System Specifications5
 - 1.4 System Overview.....8
 - 1.4.1 Front/Rear View 8
 - 1.5 System Dimensions.....10
- 2. Hardware Configuration.....11**
 - 2.1 BAX-P501-Q170 connector mapping12
 - 2.1.1 Serial port 1/3/4/5/6 connector (COM1/3/4/5/6) 12
 - 2.1.2 Serial port 2 connector (COM2) 12
 - 2.1.3 VGA connector (VGA)..... 13

1. Getting Started

1.1 Safety Precautions

Warning!



Always completely disconnect the power cord from your chassis whenever you work with the hardware. Do not make connections while the power is on. Sensitive electronic components can be damaged by sudden power surges. Only experienced electronics personnel should open the PC chassis.

Caution!



Always ground yourself to remove any static charge before touching the CPU card. Modern electronic devices are very sensitive to static electric charges. As a safety precaution, use a grounding wrist strap at all times. Place all electronic components in a static-dissipative surface or static-shielded bag when they are not in the chassis.

1.2 Packing List

- 1 x BAX-P501-Q170 ATX Barebone System with Intel® Q170 Chipset
- Other major components include the followings:
 - 1 x Power Cord
 - 1 x Screw Pack
 - 2 x Wall Mount Bracket



If any of the above items is damaged or missing, contact your retailer.

1.3 System Specifications

Component	
Mother Board	EAX-Q170P-A1R
CPU	Intel® LGA1151 Socket Supports 6th Generation Core™ i7/ i5/ i3 Processors (Max. TDP at 91W)
CPU Cooler (Type)	CPU Cooler for LGA1155 Package 4-Pin/12V
Memory	4 x 288-pin DDR4 2133MHz DIMM socket, supports up to 64GB Max
Power Supply	PS2 ATX 350W W/Active PFC Power Supply
System Fan	1 x 12" Fan M3*30L
Storage	
Hard Disk Drive	1 x 2.5" or 1 x 3.5" Internal Drive Bay
Optical Disk Drive	2 x 5.25" Drive Bays
External I/O	
PS/2 KB & Mouse	1 x PS/2 KB or Mouse
Serial Port	1 x COM 5 x COM (Optional by full-high bracket)
USB Port	4 x USB 2.0 (Front) 4 x USB 3.0 (Rear) 2 x USB 2.0, 2 x USB 3.0 (Optional by full-height bracket)
Video Port	1 x VGA, 1 x HDMI, 1 x DP, Triple display
Audio Port	Line-in, Line-out, Mic-in
LAN Port	- LAN1 / Intel® I219LM Gigabit Ethernet PHY - LAN2 / Intel® I211AT PCI-e Gigabit Ethernet
Indicator Light	1 x PWR LED, 1 x HDD LED
Expansion Slots	1 x PCI-e x 16, 1 x PCI-e x 4, 1 x PCI-e x 1, 4 x PCI 1 x M.2 2230 KeyA Slot support WiFi module 1 x SIM card slot 1 x Full Size Mini-PCIe with mSATA Support (SATA III) 7 x Full-height expansion slot
Others	Power on/off button, Reset button
Mechanical	
Power Type	ATX
Power Connector Type	AC power socket
Dimension	7.7" (W) x 17.7" (D) x 13" (H) (196mm x 450mm x 330mm)
Weight	30.8 lb/14 kg

Color	Black
Reliability	
EMI Test	CE/FCC Class B design compatible
Safety	UL/CB design compatible
Vibration Test	- Package Vibration Test - Test Standard : Reference IEC60068-2-64 Testing procedures 1. PSD: 0.026G²/Hz , 2.16 Grms 2. Non-operation mode 3. Test Frequency : 5-500Hz 4. Test Axis : X,Y and Z axis 5. 30 min. per each axis - Random Vibration Operation - Test Standard : Reference IEC60068-2-64 - Test Condition : 1. PSD: 0.00050513G²/Hz, 0.5 Grms 2. Operation mode 3. Test Frequency : 5-500Hz 4. Test Axis : X,Y and Z axis 5. 30 minutes per each axis 6. Storage : HDD - Sine Vibration test (Non-operation) 1. Test Acceleration : 2G 2. Test frequency : 5~500 Hz 3. Sweep : 1 Oct/ per one minute. (logarithmic) 4. Test Axis : X,Y and Z axis 5. Test time :10 min. each axis 6. System condition : Non-Operating mode 7. Reference IEC 60068-2-6 Testing procedures
Mechanical Shock Test	- Reference IEC 60068-2-29 Testing procedures - Test Eb : Bump Test - Wave form : Half Sine wave - Acceleration Rate : 3g - Duration Time : 11ms - No. of Shock : Z axis 300 times - Test Axis: Z axis - System condition : operation (running burn in test program)
Drop Test	Packing Drop

Quick Reference Guide


	• Reference ISTA 2A, Method : IEC-60068-2-32 Test:Ed Test Ea : Drop Test • Test phase : One corner, three edges, six faces
Operating Temperature	• (w/HDD), ambient w/ air flow • 0°C ~ 40°C (32°F ~ 104°F)
Operating Humidity	• 0% ~ 90% Relative Humidity, Non-condensing
Storage Temperature	• -20°C ~ 75°C (-4°F ~ 167°F)



Note: Specifications are subject to change without notice.

1.4 System Overview


1.4.1 Front/Rear View

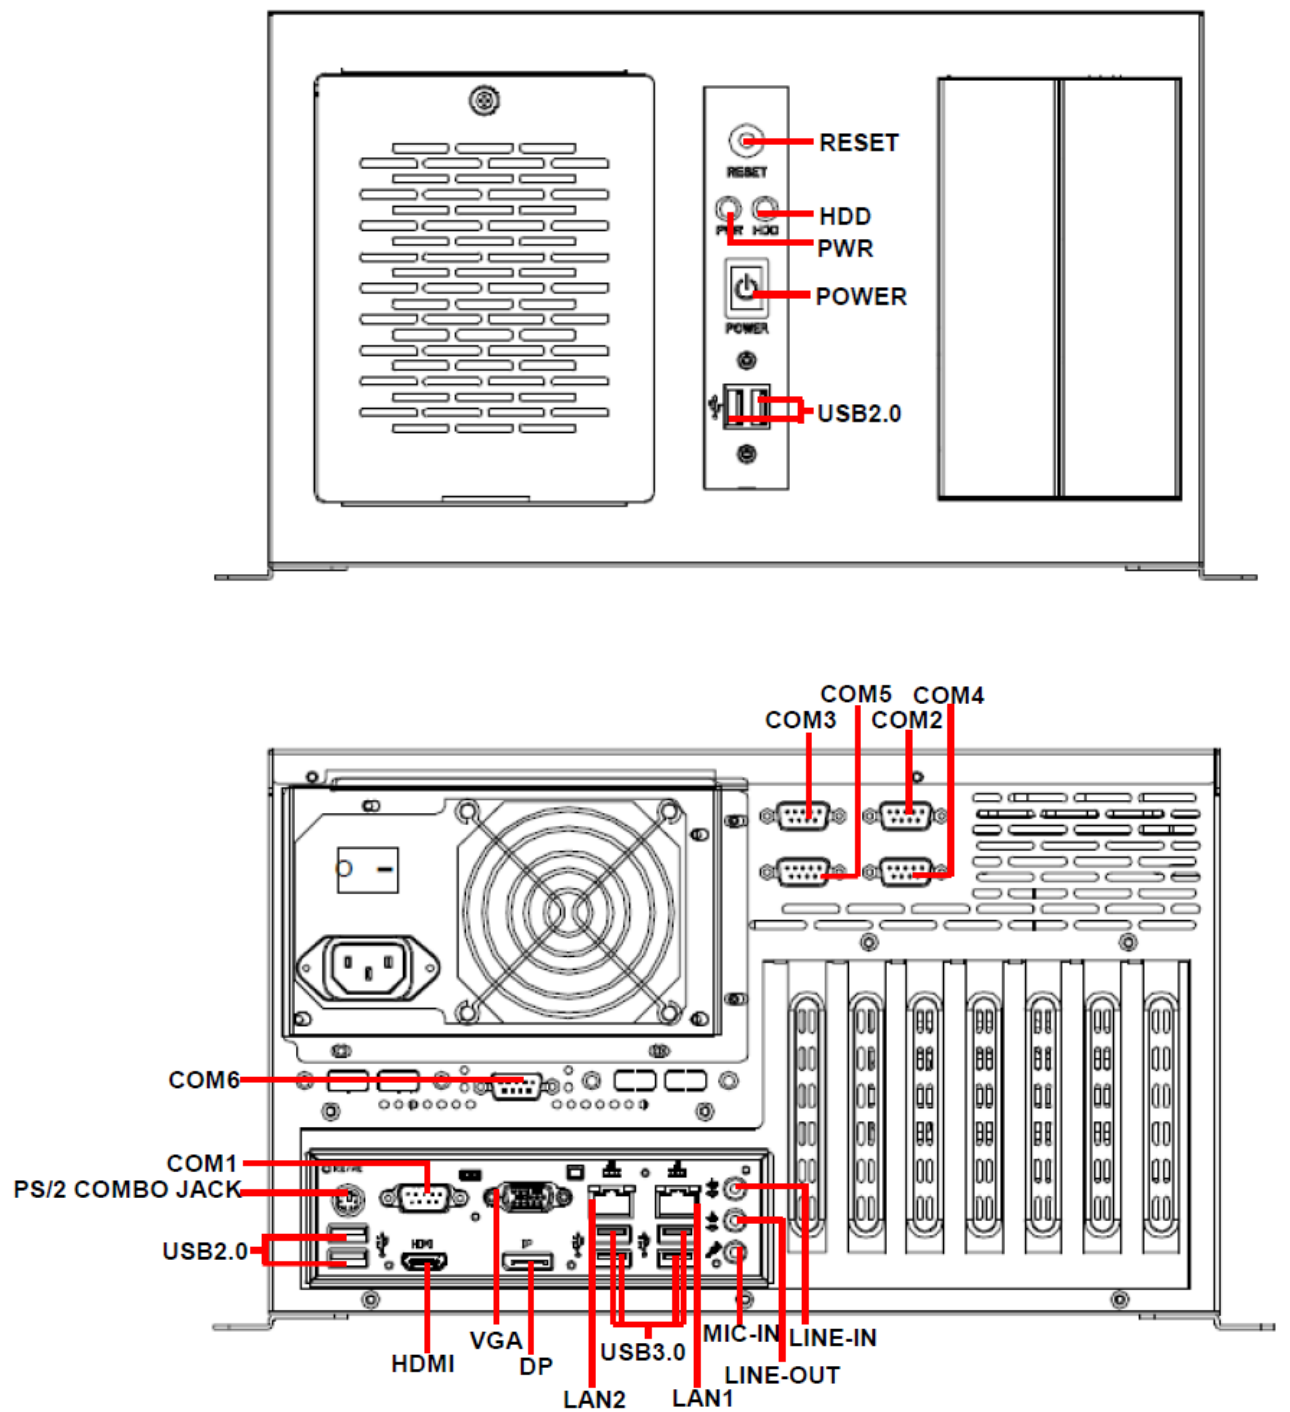

Connectors		
Label	Function	Note
RESET	Reset button	
HDD	HDD Indicator	

PWR	System power indicator
POWER	Power on button
USB2.0	4 x USB2.0 connector
USB3.0	4 X USB3.0 connector
LAN1/2	RJ-45 Ethernet 1/2
COM1~6	Serial port 1~6 connector
PS/2 COMBO JACK	PS/2 keyboard & mouse connector
HDMI	HDMI connector
LINE-OUT	Line-out audio jack
LINE-IN	Line-in audio jack
MIC-IN	Mic-in audio jack
VGA	VGA connector
DP	DP connector

1.5 System Dimensions

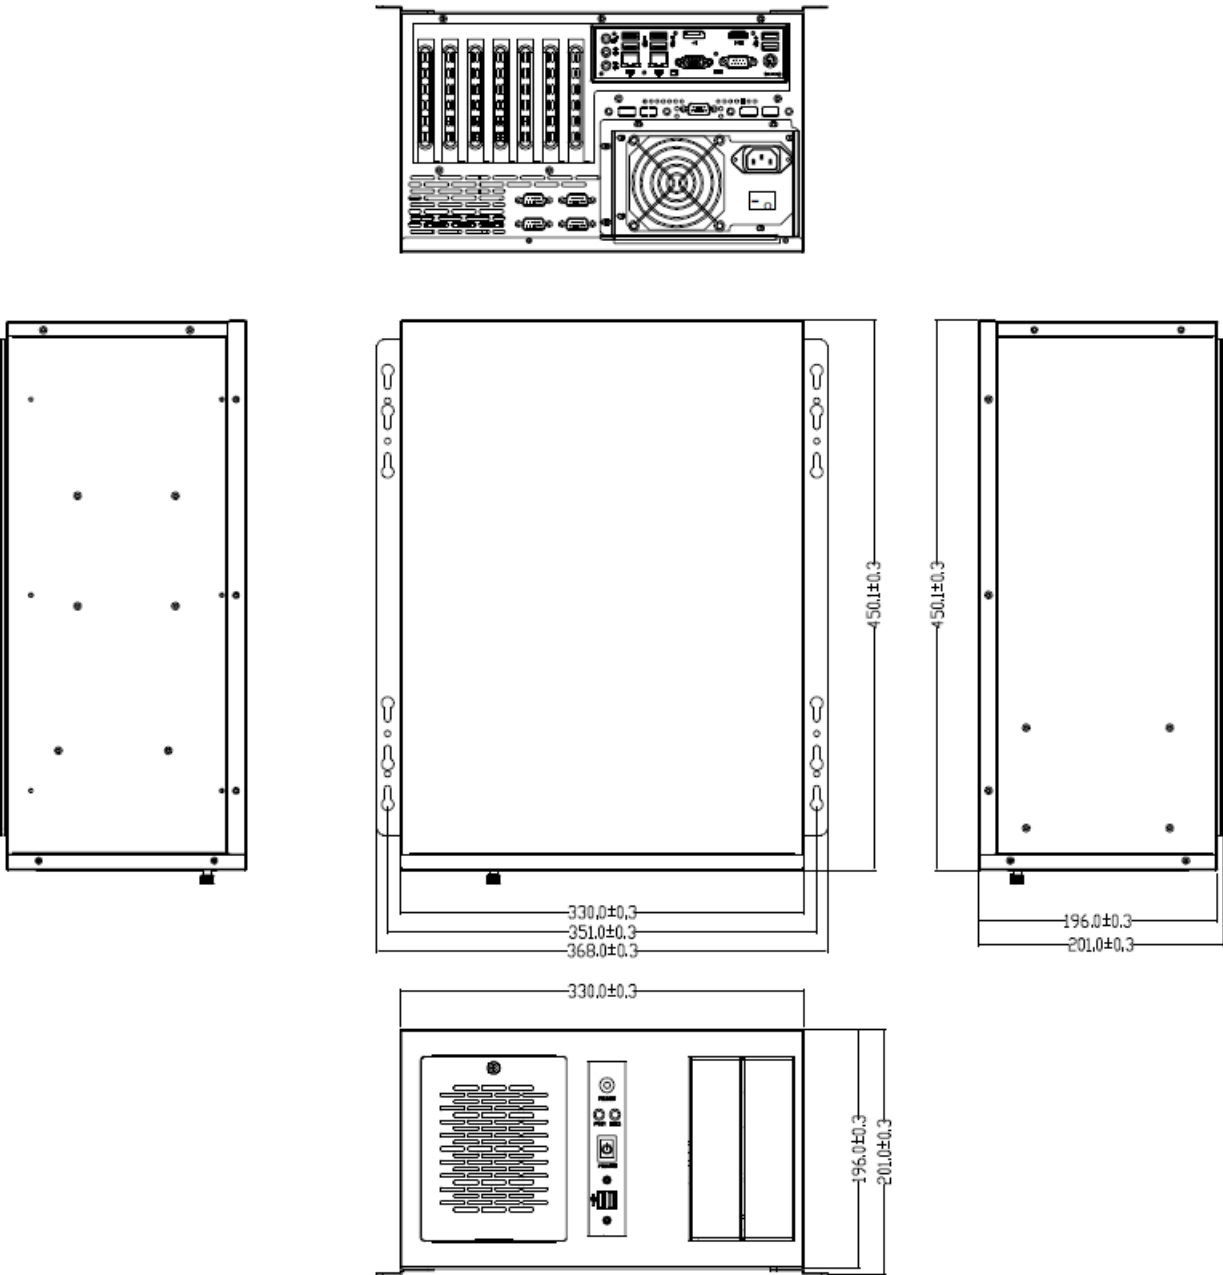

(Unit: mm)

2. Hardware Configuration

For advanced information, please refer to:

1- EAX-Q170P User's Manual





Note: If you need more information, please visit our website:

<http://www.avalue.com.tw>



2.1 BAX-P501-Q170 connector mapping

2.1.1 Serial port 1/3/4/5/6 connector (COM1/3/4/5/6)

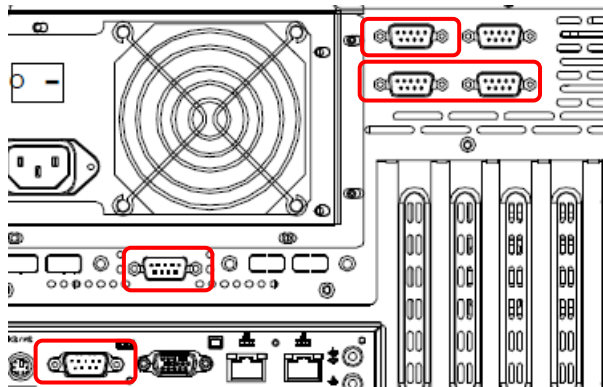

Signal	PIN	PIN	Signal
NDCD#	1	6	NDSR#
NRXD	2	7	NRTS#
NTXD	3	8	NCTS#
NDTR#	4	9	JNRI#
GND	5		

2.1.2 Serial port 2 connector (COM2)

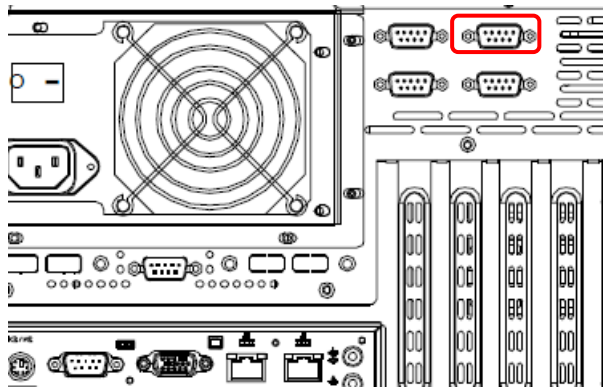

RS-232 Mode

Signal	PIN	PIN	Signal
NDCD#	1	6	NDSR#
NRXD	2	7	NRTS#
NTXD	3	8	NCTS#
NDTR#	4	9	JNRI#
GND	5		



RS-485 Mode

Signal	PIN	PIN	Signal
485TX-	1	6	NC
NC	2	7	NC
485TX+	3	8	NC
NC	4	9	NC
GND	5		

RS-422 Mode

Signal	PIN	PIN	Signal
485TX-	1	6	NC
422RX-	2	7	NC
485TX+	3	8	NC
422RX+	4	9	NC
GND	5		

2.1.3 VGA connector (VGA)

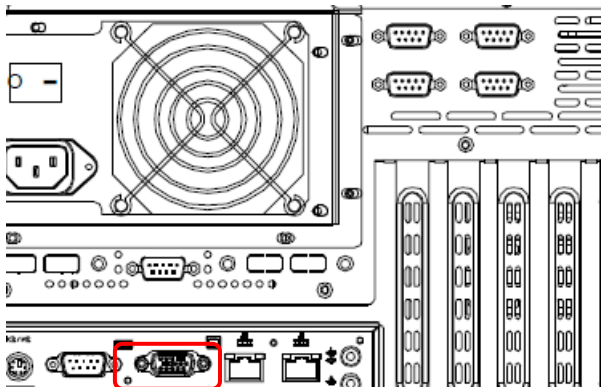

PIN	Signal	PIN	Signal	PIN	Signal
1	RED	6	GND	11	NC
2	GREEN	7	GND	12	DDCDAT
3	BLUE	8	GND	13	HSYNC
4	NC	9	+5V	14	VSYSNS
5	GND	10	GND	15	DDCCLK

