

# **ARC-1732-C1**

**17" 6th Gen Intel® Core™ BGA Processor i7/i5/i3 Fanless  
Rugged Touch Panel PC with IET Expansion**

## **Quick Reference Guide**

**1<sup>st</sup> Ed – 14 December 2020**

### **Copyright Notice**

Copyright © 2020 Avalue Technology Inc., ALL RIGHTS RESERVED.

## FCC Statement



THIS DEVICE COMPLIES WITH PART 15 FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:

- (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE.
- (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.

THIS EQUIPMENT HAS BEEN TESTED AND FOUND TO COMPLY WITH THE LIMITS FOR A CLASS "A" DIGITAL DEVICE, PURSUANT TO PART 15 OF THE FCC RULES.

THESE LIMITS ARE DESIGNED TO PROVIDE REASONABLE PROTECTION AGAINST HARMFUL INTERFERENCE WHEN THE EQUIPMENT IS OPERATED IN A COMMERCIAL ENVIRONMENT. THIS EQUIPMENT GENERATES, USES, AND CAN RADIATE RADIO FREQUENCY ENERGY AND, IF NOT INSTALLED AND USED IN ACCORDANCE WITH THE INSTRUCTION MANUAL, MAY CAUSE HARMFUL INTERFERENCE TO RADIO COMMUNICATIONS.

OPERATION OF THIS EQUIPMENT IN A RESIDENTIAL AREA IS LIKELY TO CAUSE HARMFUL INTERFERENCE IN WHICH CASE THE USER WILL BE REQUIRED TO CORRECT THE INTERFERENCE AT HIS OWN EXPENSE.

## A Message to the Customer

### ***Avalue Customer Services***

Each and every Avalue's product is built to the most exacting specifications to ensure reliable performance in the harsh and demanding conditions typical of industrial environments. Whether your new Avalue device is destined for the laboratory or the factory floor, you can be assured that your product will provide the reliability and ease of operation for which the name Avalue has come to be known.

Your satisfaction is our primary concern. Here is a guide to Avalue's customer services. To ensure you get the full benefit of our services, please follow the instructions below carefully.

### ***Technical Support***

We want you to get the maximum performance from your products. So if you run into technical difficulties, we are here to help. For the most frequently asked questions, you can easily find answers in your product documentation. These answers are normally a lot more detailed than the ones we can give over the phone. So please consult the user's manual first.

To receive the latest version of the user's manual; please visit our Web site at:

<http://www.alue.com.tw/>

# Content

<b>1.</b>	<b>Getting Started .....</b>	<b>6</b>
1.1	Safety Precautions .....	6
1.2	Packing List.....	6
1.3	System Specifications .....	7
1.4	System Overview .....	10
1.4.1	I/O View .....	10
1.5	System Dimensions .....	11
<b>2.</b>	<b>Hardware Configuration .....</b>	<b>12</b>
2.1	ARC-1732-C1 connector mapping .....	13
2.1.1	Serial port 1 connector (COM1).....	13
2.1.2	Serial port 2/3/4/5/6 connector (COM2/3/4/5/6) .....	13
2.2	Installing Mounting Brackets (ARC-1732-C1) .....	14
2.3	Installing VESA Mounting (ARC-1732-C1).....	15
2.4	EMX-SKLUP Overviews.....	16
2.5	EMX-SKLUP Jumper and Connector list.....	18
2.6	EMX-SKLUP Jumper and Connector settings.....	20
2.6.1	Serial port 1/2/3/4/5/6 pin9 signal select (JRI1/JRI2/JRI3/JRI4/JRI5/JRI6) .....	20
2.6.2	LVDS Back Light power selection (JSBKL1) .....	20
2.6.3	AT/ATX Power Mode Select (JSATX1) .....	21
2.6.4	Clear CMOS (JCOMS1) .....	21
2.6.5	LCD Inverter connector (JBKL1) .....	22
2.6.6	General purpose I/O connector (DIO1) .....	22
2.6.7	Serial port 1/2 connector (COM1/2).....	23
2.6.8	Serial port 3/4/5/6 connector (COM3/4/5/6) .....	23
2.6.9	Serial Port 1/2 RS485/422 Mode connector (JRS485_1/2) .....	24
2.6.10	SATA Power connector 1/2 (SPWR1/2) .....	24
2.6.11	Power connector (PWR1).....	25
2.6.12	USB connector 3 (USB3).....	25
2.6.13	USB connector 4 (USB4).....	26
2.6.14	Battery connector (BT1) .....	26
2.6.15	LVDS connector (LVDS1).....	27
2.6.16	Audio connector (FAUD1) .....	28
2.6.17	EC Debug (JEC_SPI) .....	28
2.6.18	SPI connector (JSPI1) .....	29

# ARC-1732-C1

2.6.19	Sony/Philips Digital Interface (SPDIF1).....	29
2.6.20	Miscellaneous setting connector 1 (FPT1) .....	30
2.6.21	Miscellaneous setting connector 2 (FPT2) .....	30
2.6.22	LED indicator connector 1 (LED1).....	31
2.6.23	LED indicator connector 2 (LED2).....	31
2.6.24	Speaker connector (SPK1).....	32
2.6.25	Mic-in connector (DMIC1).....	32
2.6.26	I2C connector (I2C1) .....	33
2.6.27	eDP_Panel connector (EDP1).....	33
2.6.28	LPC connector (JLPC).....	34
2.6.29	CPU fan connector (FAN1).....	34
2.6.30	HDMI1/DP1/DP2/LVDS1 .....	35
<b>3.BIOS Setup .....</b>	<b>36</b>	
3.1	Introduction .....	37
3.2	Starting Setup .....	37
3.3	Using Setup .....	38
3.4	Getting Help .....	39
3.5	In Case of Problems.....	39
3.6	BIOS setup.....	40
3.6.1	Main Menu .....	40
3.6.1.1	System Language.....	41
3.6.1.2	System Date .....	41
3.6.1.3	System Time.....	41
3.6.2	Advanced Menu.....	41
3.6.2.1	Trusted Computing .....	42
3.6.2.2	APCI Settings .....	42
3.6.2.3	AMT Configuration.....	43
3.6.2.4	PCH-FW Configuration .....	44
3.6.2.4.1	Firmware Update Configuration .....	44
3.6.2.5	IT8528 Super IO Configuration .....	45
3.6.2.5.1	Serial Port 1 Configuration.....	46
3.6.2.5.2	Serial Port 2 Configuration.....	46
3.6.2.5.3	Serial Port 3 Configuration.....	47
3.6.2.5.4	Serial Port 4 Configuration.....	47
3.6.2.5.5	Serial Port 5 Configuration.....	48
3.6.2.5.6	Serial Port 6 Configuration.....	48
3.6.2.6	H/W Monitor .....	49
3.6.2.6.1	Smart Fan Mode Configuration .....	49
3.6.2.7	S5 RTC Wake Settings .....	50
3.6.2.8	Serial Port Console Redirection .....	51

3.6.2.8.1	COM1 .....	52
3.6.2.9	CPU Configuration.....	54
3.6.2.10	Intel TXT Information .....	55
3.6.2.11	SATA Configuration .....	56
3.6.2.12	Network Stack Configuration .....	57
3.6.2.13	CSM Configuration.....	58
3.6.2.14	SDIO Configuration.....	59
3.6.2.15	USB Configuration .....	59
3.6.3	Chipset.....	61
3.6.3.1	System Agent (SA) Configuration .....	61
3.6.3.1.1	Graphics Configuration .....	62
3.6.3.1.2	Memory Configuration.....	63
3.6.3.2	PCH-IO Configuration .....	63
3.6.3.2.1	PCI Express Configuration.....	64
3.6.3.2.1.1	PCI Express Root Port 5 (i210/211) .....	64
3.6.3.2.1.2	PCI Express Root Port 6 (PCIe Slot) .....	65
3.6.3.2.1.3	PCI Express Root Port 7 (M.2 KeyB share SATA) .....	66
3.6.3.2.1.4	PCI Express Root Port 8 (M.2 KeyB).....	67
3.6.3.2.1.5	PCI Express Root Port 9 (M.2 KeyA).....	68
3.6.3.2.2	USB Configuration .....	69
3.6.3.2.3	HD Audio Configuration .....	69
3.6.3.2.4	SCS Configuration .....	70
3.6.4	Security .....	71
3.6.4.1	Secure Boot menu .....	72
3.6.4.1.1	Key Management.....	73
3.6.5	Boot.....	73
3.6.6	Save and exit .....	74
3.6.6.1	Save Changes and Reset.....	74
3.6.6.2	Discard Changes and Reset.....	74
3.6.6.3	Restore Defaults .....	74
3.6.6.4	Launch EFI Shell from filesystem device .....	74

# 1. Getting Started

## 1.1 Safety Precautions

### Warning!



Always completely disconnect the power cord from your chassis whenever you work with the hardware. Do not make connections while the power is on. Sensitive electronic components can be damaged by sudden power surges. Only experienced electronics personnel should open the PC chassis.

### Caution!



Always ground yourself to remove any static charge before touching the CPU card. Modern electronic devices are very sensitive to static electric charges. As a safety precaution, use a grounding wrist strap at all times. Place all electronic components in a static-dissipative surface or static-shielded bag when they are not in the chassis.

## 1.2 Packing List

- 1 x ARC-1732-C1 Panel PC
- 1 x Power Adapter
- 1 x 220V Power Cord (CN)
- 4 x screws for VESA



---

If any of the above items is damaged or missing, contact your retailer.

## 1.3 System Specifications

<b>Component</b>	
<b>Mother Board</b>	EMX-SKLUP
<b>CPU</b>	Onboard 6th Gen. Intel® Core™ SoC i7/i5/i3 & Celeron® BGA Processor
<b>CPU Cooler (Type)</b>	Fanless Heatsink
<b>Memory</b>	2 x 260-pin DDR4 SODIMM Socket Up to 32GB DDR4 2133MTs SDRAM
<b>Power Supply</b>	DC in
<b>Adapter</b>	60W power adaptor
<b>Speaker</b>	2W*2
<b>Wireless LAN</b>	Optional USB or M.2 module
<b>Bluetooth</b>	Optional
<b>Operating System</b>	Ubuntu, Windows 10
<b>Expansion Card</b>	1 x M.2 TypeB 3042/2242/2260/2280, 1 x M.2 TypeA
<b>Storage</b>	
<b>Hard Disk Drive</b>	1 x 2.5" Drive Bay
<b>Solid State Drive</b>	1 x 2.5" Drive Bay
<b>Other Storage Device</b>	1 x M.2 TypeB 3042/2242/2260/2280
<b>Panel</b>	
<b>LCD Panel</b>	17" AUO M170ETN01.1 250nits 1280*1024 (C9689R1701R)
<b>B/L Inverter/Converter</b>	LCD built in
<b>Touch Screen</b>	17"Capacitive Touch Panel (C968XC170T0R)
<b>Touch Controller</b>	IC12510P.C3.P2.V1(C968XC170C0R)
<b>External I/O</b>	
<b>Serial Port</b>	6 x COM ( default: 1RS485,5RS232 )
<b>USB Port</b>	4 x USB3.0
<b>DIO Port</b>	16-bit GPIO Optional for COM Port
<b>Video Port</b>	2 x DP, 1 x HDMI
<b>Audio Port</b>	Realtek ALC892 supports 2-CH
<b>LAN Port</b>	1 x Intel® I219LM Gigabit Ethernet PHY 1 x Intel® I211AT PCI-e Gigabit Ethernet
<b>Wireless LAN Antenna</b>	2 x Antenna
<b>Expansion Slots</b>	1 x M.2 TypeB 3042/2242/2260/2280 1 x M.2 TypeA
<b>Mechanical</b>	
<b>Power Type</b>	AT/ATX
<b>Power Requirement</b>	DC +12V~24V 2.5mm Lockable DC Jack

## ARC-1732-C1

<b>Dimension</b>	350.5 x 274.5 x 65 mm
<b>Weight</b>	3.8 Kgs
<b>Color</b>	Black
<b>Fanless</b>	Yes
<b>OS Support</b>	Linux, Ubuntu, Windows 10
<b>Reliability</b>	
<b>EMI Test</b>	CE/ FCC class B
<b>Dust and Rain Test</b>	Front Panel IP65
<b>Vibration Test</b>	<p>Random Vibration Operation:</p> <ol style="list-style-type: none"><li>1. PSD: 0.00454G<sup>2</sup>/Hz , 1.5 Grms</li><li>2. operation mode</li><li>3. Test Frequency : 5-500Hz</li><li>4. Test Axis : X,Y and Z axis</li><li>5. 30 minutes per each axis</li><li>6. IEC 60068-2-64 Test:Fh</li><li>7. Storage : CF or SSD</li></ol> <p>Sine Vibration test (Non-operation)</p> <ol style="list-style-type: none"><li>1 Test Acceleration : 2G</li><li>2 Test frequency : 5~500 Hz</li><li>3 Sweep : 1 Oct/ per one minute. (logarithmic)</li><li>4 Test Axis : X,Y and Z axis</li><li>5 Test time :30 min. each axis</li><li>6 System condition : Non-Operating mode</li><li>7. Reference IEC 60068-2-6 Testing procedures</li></ol> <p>Package vibration test</p> <ol style="list-style-type: none"><li>1. PSD: 0.026G<sup>2</sup>/Hz , 2.16 Grms</li><li>2. Non-operation mode</li><li>3. Test Frequency : 5-500Hz</li><li>4. Test Axis : X,Y and Z axis</li><li>5. 30 min. per each axis</li><li>6. IEC 60068-2-64 Test:Fh</li></ol>
<b>Mechanical Shock Test</b>	<ol style="list-style-type: none"><li>1. Wave form : Half Sine wave</li><li>2. Acceleration Rate : 10g for operation mode</li><li>3. Duration Time : 11ms</li><li>4. No. of Shock : +/- X,Y,Z axis 3 times</li><li>5. Test Axis: +/- X,Y,Z axis</li><li>6. Operation mode</li><li>7. Reference IEC 60068-2-27 Testing procedures Test Eb : Shock Test</li></ol>


<b>Drop Test</b>	Package drop test 1 One corner , three edges, six faces 2 ISTA 2A, IEC-60068-2-32 Test:Ed
<b>Operating Temperature</b>	0~+50 degree C
<b>Operating Humidity</b>	0~90% Relative Humidity, Non-condensing
<b>Storage Temperature</b>	-20~60 degree



**Note:** Specifications are subject to change without notice.

## 1.4 System Overview


### 1.4.1 I/O View

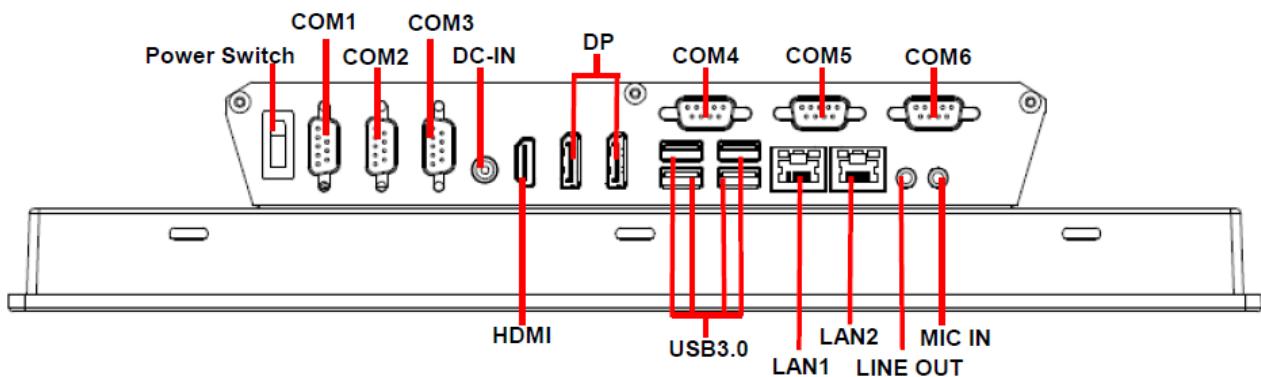

### Connectors

Label	Function	Note
DC-IN	DC Power-in connector	
COM	6 x Serial port connector (default: 1RS485,3RS232,1GPIO,1NA)	DB-9 male connector
DP	2 x DP connector	
USB	4 x USB 3.0 connector	
LAN1/2	RJ-45 Ethernet 1/2	
HDMI	HDMI connector	
MIC IN	Mic-in audio jack	
LINE OUT	Line-out audio jack	
Power Switch	Power on button	

## 1.5 System Dimensions

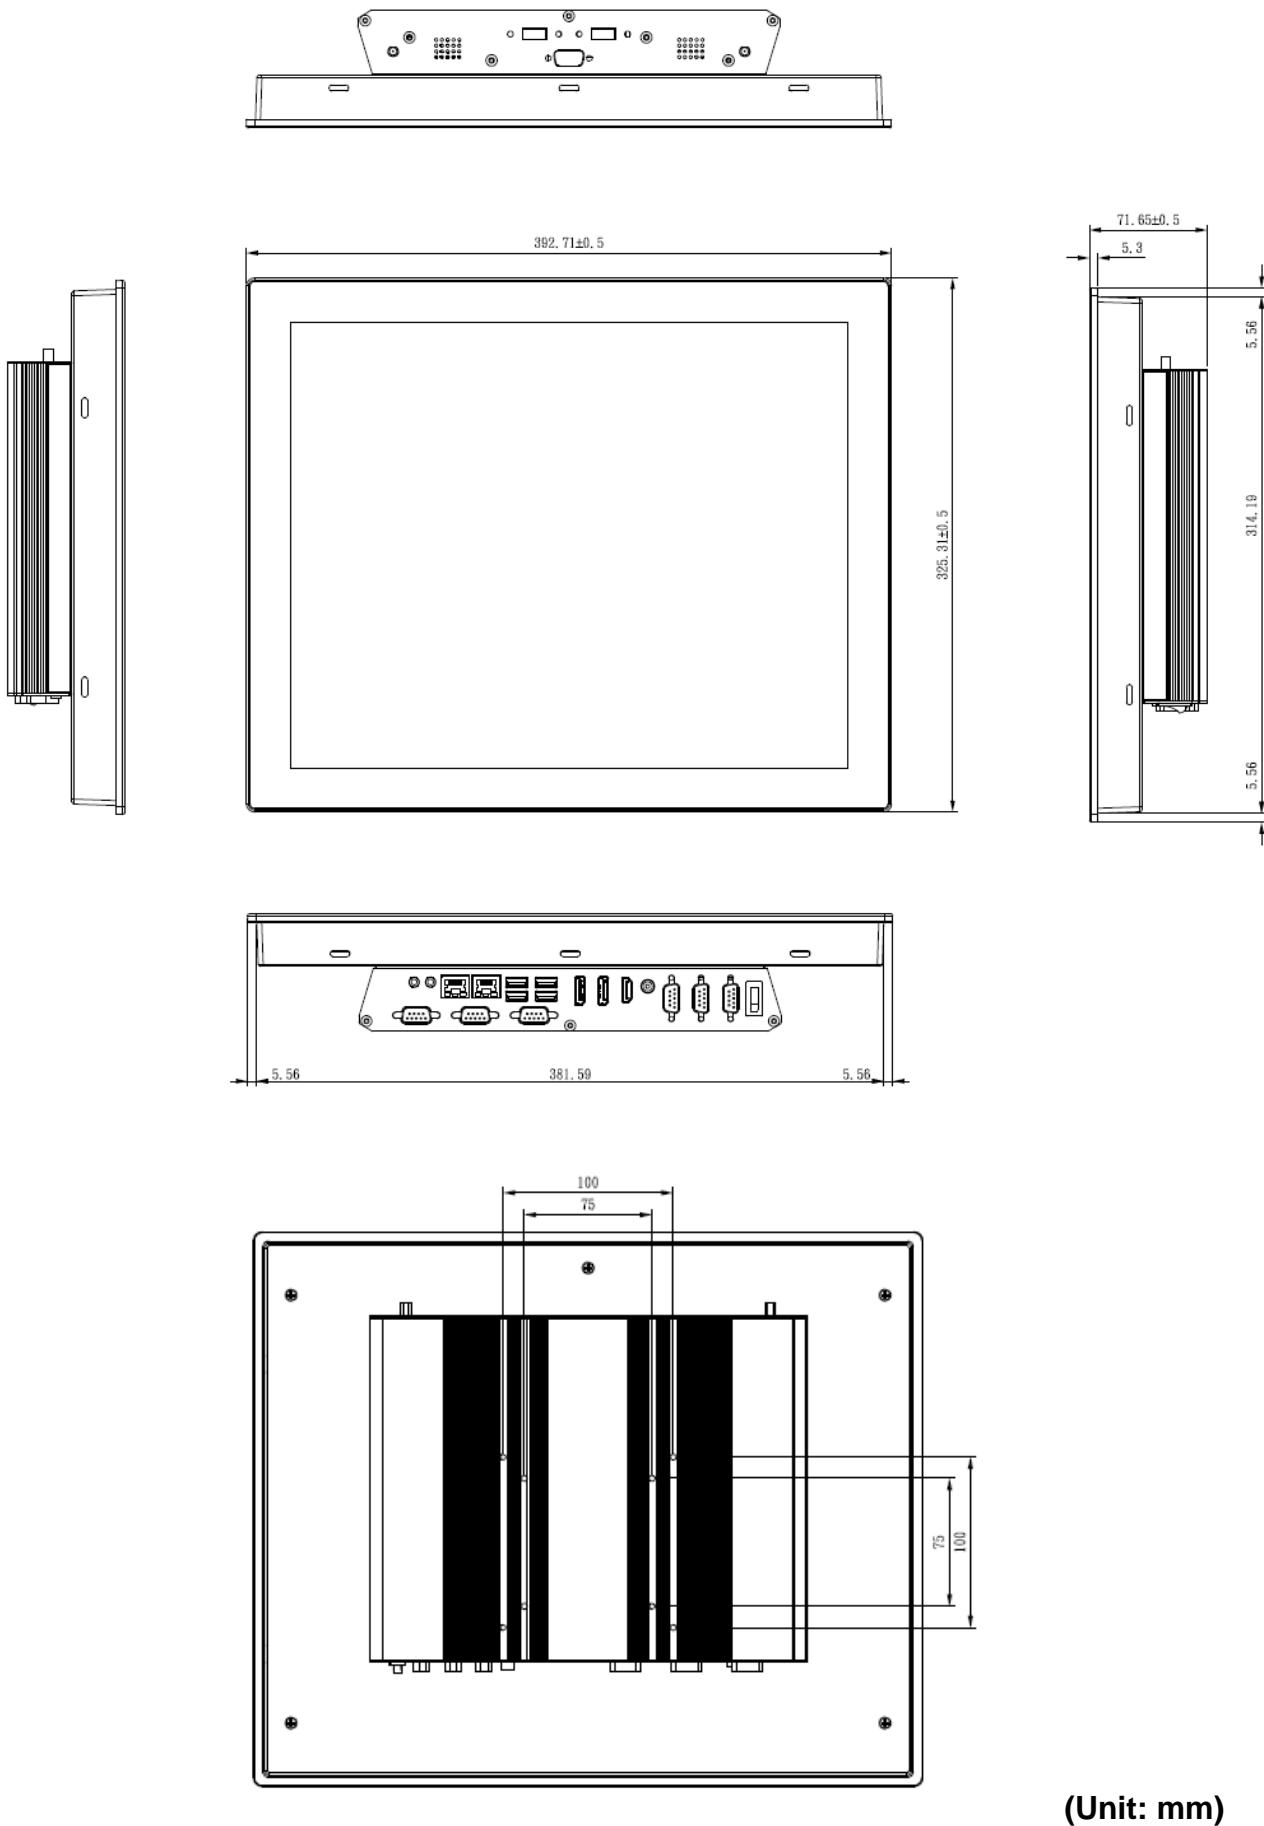

## 2. Hardware Configuration

For advanced information, please refer to:

- 1- EMX-SKLUP User's Manual.





**Note:** If you need more information, please visit our website:

<http://www.alue.com.tw>

## 2.1 ARC-1732-C1 connector mapping

### 2.1.1 Serial port 1 connector (COM1)

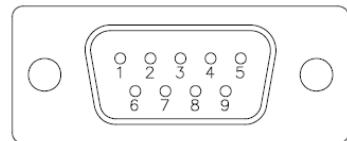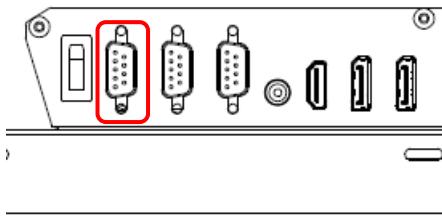



RS-232

Signal	PIN	PIN	Signal
DCD	1	6	DSR
RXD	2	7	RTS
TXD	3	8	CTS
DTR	4	9	RI
GND	5		

RS-422/485


Signal	PIN	PIN	Signal
		5	GND
422RX+	4	3	485TX+
422RX-	2	1	485TX-

### 2.1.2 Serial port 2/3/4/5/6 connector (COM2/3/4/5/6)

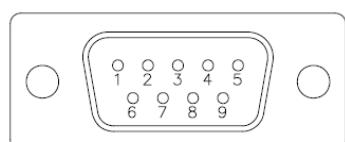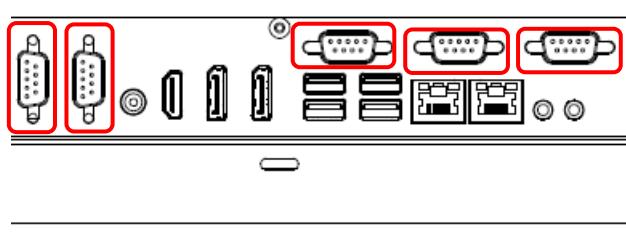

Signal	PIN	PIN	Signal
DCD	1	6	DSR
RXD	2	7	RTS
TXD	3	8	CTS
DTR	4	9	RI
GND	5		


## 2.2 Installing Mounting Brackets (ARC-1732-C1)

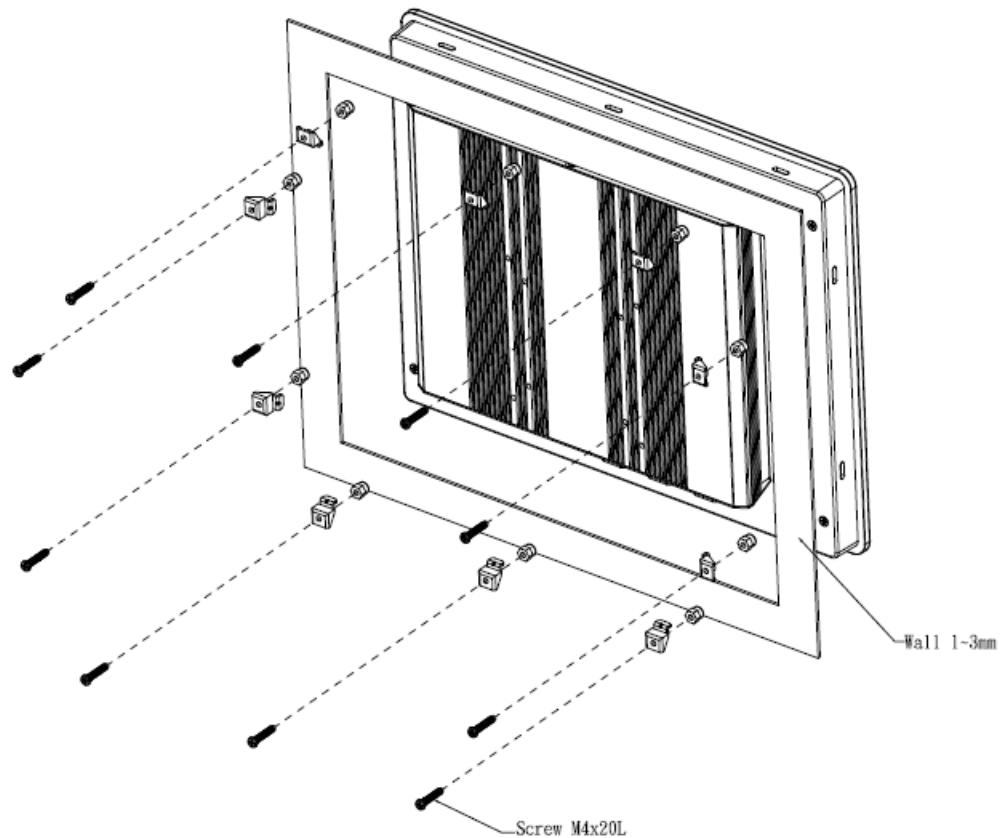

**Step 1.** Position brackets on both sides, matching the holes on the system.


**Step 2.** Insert and fasten screws on each side of the system to secure Mounting brackets.

## 2.3 Installing VESA Mounting (ARC-1732-C1)

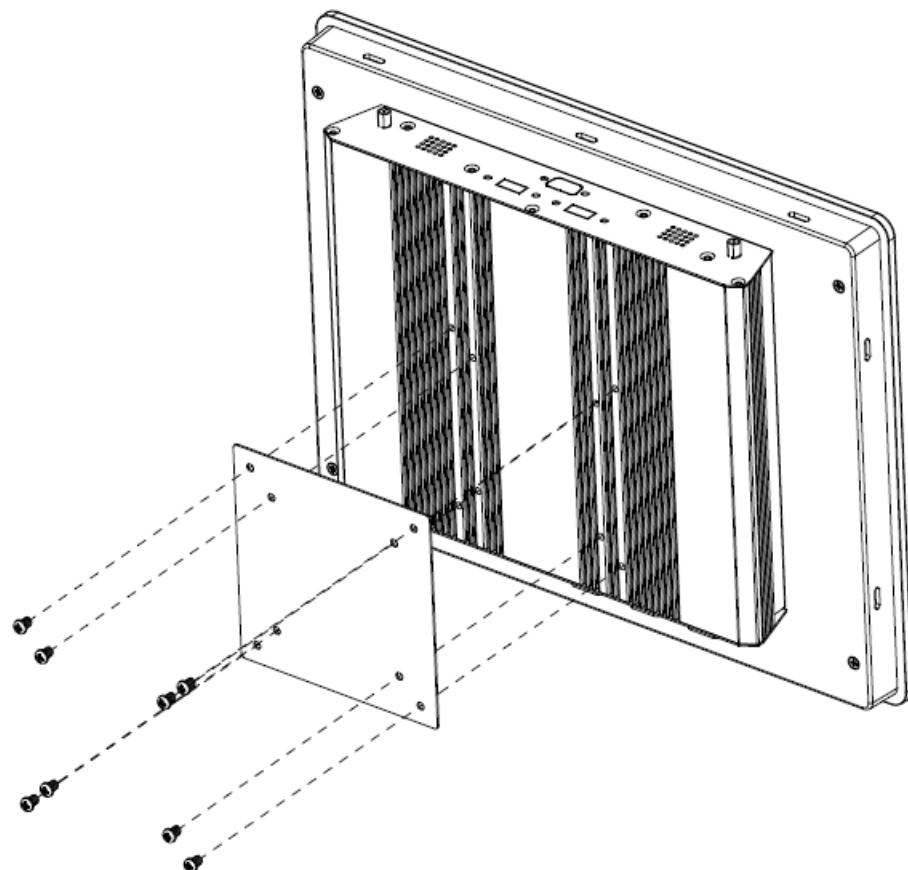


**Step 1.** Insert and fasten screws on each side of the system to secure VESA Mounting.

## 2.4 EMX-SKLUP Overviews

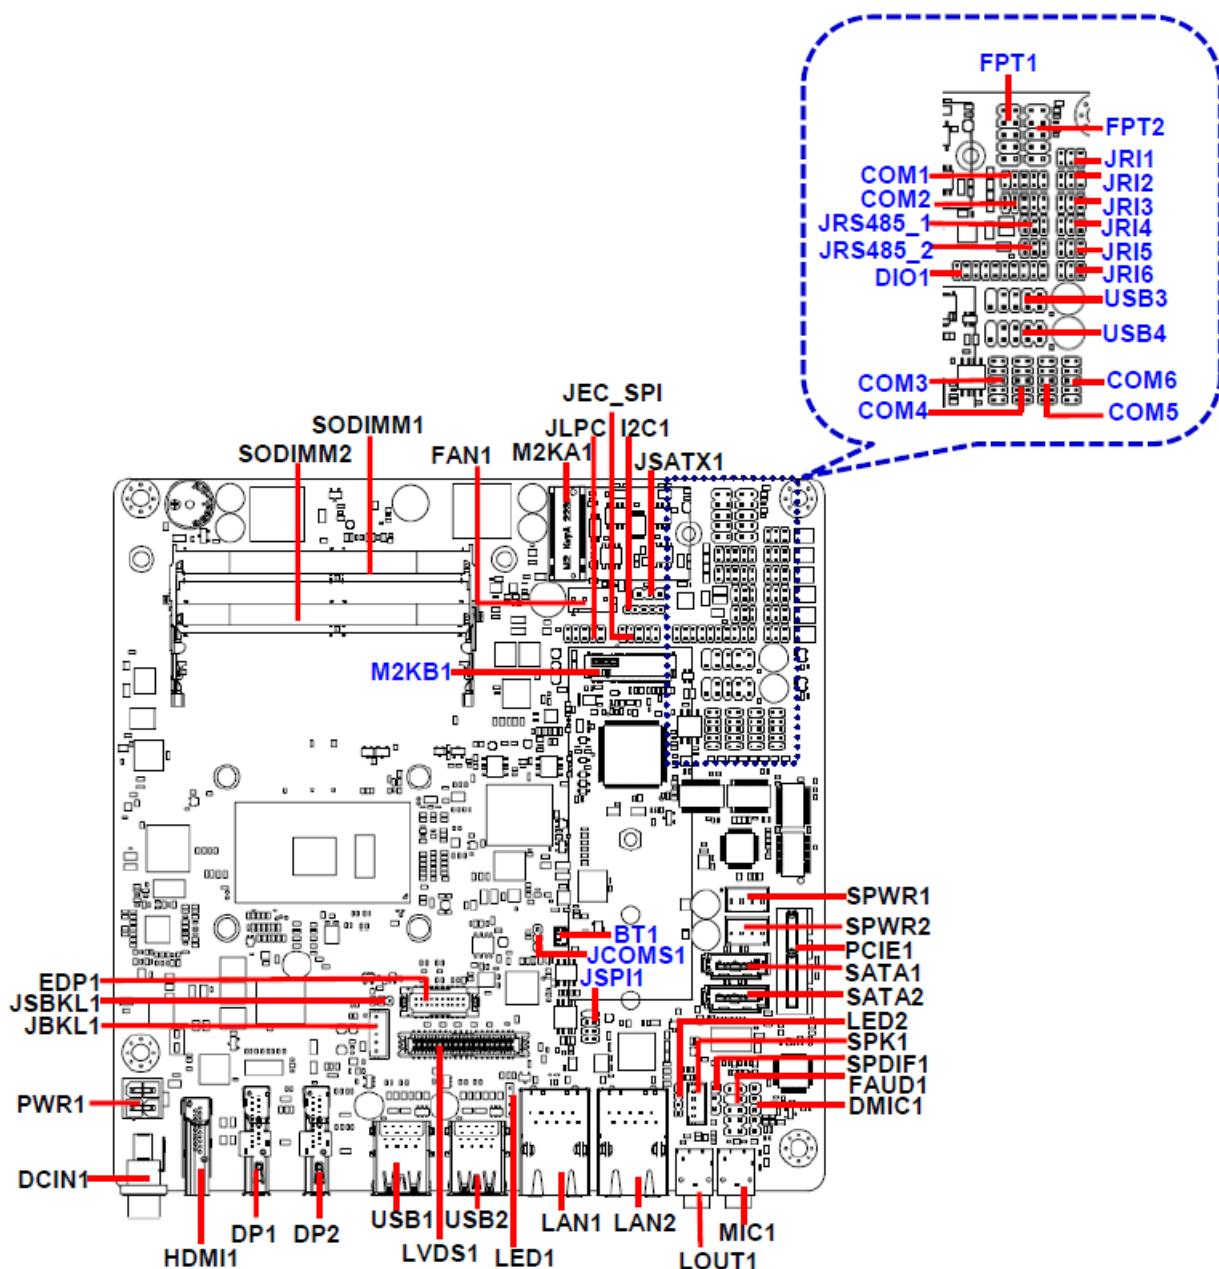

**Note:**

If M.2 Type B 3042/2242/2260/2280 using PCI-e x2 device, it requires OEM BIOS ME setting; hence PCI-e slot is not workable.

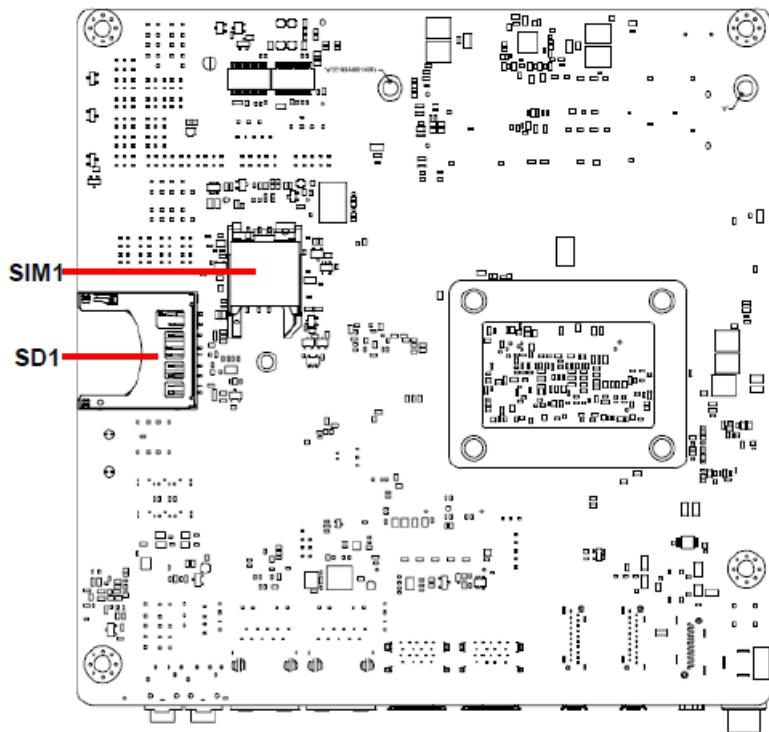

**Note:**

SD card support list please refer to HW Storage Compatibility Test report.

## 2.5 EMX-SKLUP Jumper and Connector list

### Jumpers

Label	Function	Note
JRI1/2/3/4/5/6	Serial port 1/2/3/4/5/6 pin9 signal select	3 x 2 header, pitch 2.00mm
JSBKL1	LVDS Back Light power selection	3 x 1 header, pitch 2.00mm
JSATX1	AT/ATX Power Mode Select	3 x 1 header, pitch 2.54mm
JCOMS1	Clear CMOS	3 x 1 header, pitch 2.00mm


### Connectors

Label	Function	Note
FPT1	Miscellaneous setting connector 1	5 x 2 header, pitch 2.54mm
FPT2	Miscellaneous setting connector 2	5 x 2 header, pitch 2.54mm
SODIMM1/2	206-pin DDR4 SO-DIMM socket	
FAUD1	Front Audio connector	5 x 2 header, pitch 2.54mm
JKL1	LCD Inverter connector	5 x 1 wafer, pitch 2.00mm
JSPI1	SPI connector	4 x 2 header, pitch 2.00mm
JEC_SPI	EC Debug	5 x 2 header, pitch 2.00mm
COM1	Serial Port 1 connector	5 x 2 header, pitch 2.00mm
COM2	Serial Port 2 connector	5 x 2 header, pitch 2.00mm
COM3	Serial Port 3 connector	5 x 2 header, pitch 2.00mm
COM4	Serial Port 4 connector	5 x 2 header, pitch 2.00mm
COM5	Serial Port 5 connector	5 x 2 header, pitch 2.00mm
COM6	Serial Port 6 connector	5 x 2 header, pitch 2.00mm
DIO1	General purpose I/O connector	10 x 2 header, pitch 2.00mm
SPK1	Speaker connector	4 x 1 wafer, pitch 2.00mm
LVDS1	LVDS Connector	20 x 2 wafer, pitch 1.25mm
USB1/2	USB connector 1/2	
USB3/4	USB connector 3/4	5 x 2 header, pitch 2.54mm
SPDIF1	Sony/Philips Digital Interface	3 x 1 header, pitch 2.54mm
LAN1/2	RJ-45 Ethernet 1/2	
PCIE1	PCIe connector	
LED1	LED indicator connector 1	4 x 1 header, pitch 2.00mm
LED2	LED indicator connector 2	4 x 1 header, pitch 2.00mm
BT1	Battery connector	2 x 1 wafer, pitch 1.25mm

<b>M2KA1</b>	M.2 2230 Type A Slot	
<b>M2KB1</b>	M.2 3042/2242/2260/2280 Type B Slot	
<b>DP1/2</b>	DP connector 1/2	
<b>EDP1</b>	eDP_Panel connector	10 x 2 wafer, pitch 1.25mm
<b>JRS485_1/2</b>	Serial Port 1/2 RS485/422 Mode connector	3 x 2 header, pitch 2.00mm
<b>JLPC</b>	LPC connector	5 x 2 header, pitch 2.00mm
<b>DCIN1</b>	DC Power-in connector	
<b>PWR1</b>	Power connector	2 x 2 wafer, pitch 4.20mm
<b>SATA1/2</b>	Serial ATA connector 1/2	
<b>SPWR1/2</b>	SATA Power connector 1/2	4 x 1 wafer, pitch 2.54mm
<b>I2C1</b>	I2C connector	5 x 1 header, pitch 2.00mm
<b>HDMI1</b>	HDMI connector	
<b>LOUT1</b>	Line-out audio jack	
<b>MIC1</b>	Mic-in audio jack	
<b>DMIC1</b>	Mic-in connector	5 x 1 header, pitch 2.54mm
<b>SD1</b>	SD card slot	
<b>SIM1</b>	SIM card slot	
<b>FAN1</b>	CPU fan connector	4 x 1 wafer, pitch 2.54mm


## 2.6 EMX-SKLUP Jumper and Connector settings

### 2.6.1 Serial port 1/2/3/4/5/6 pin9 signal select (JRI1/JRI2/JRI3/JRI4/JRI5/JRI6)

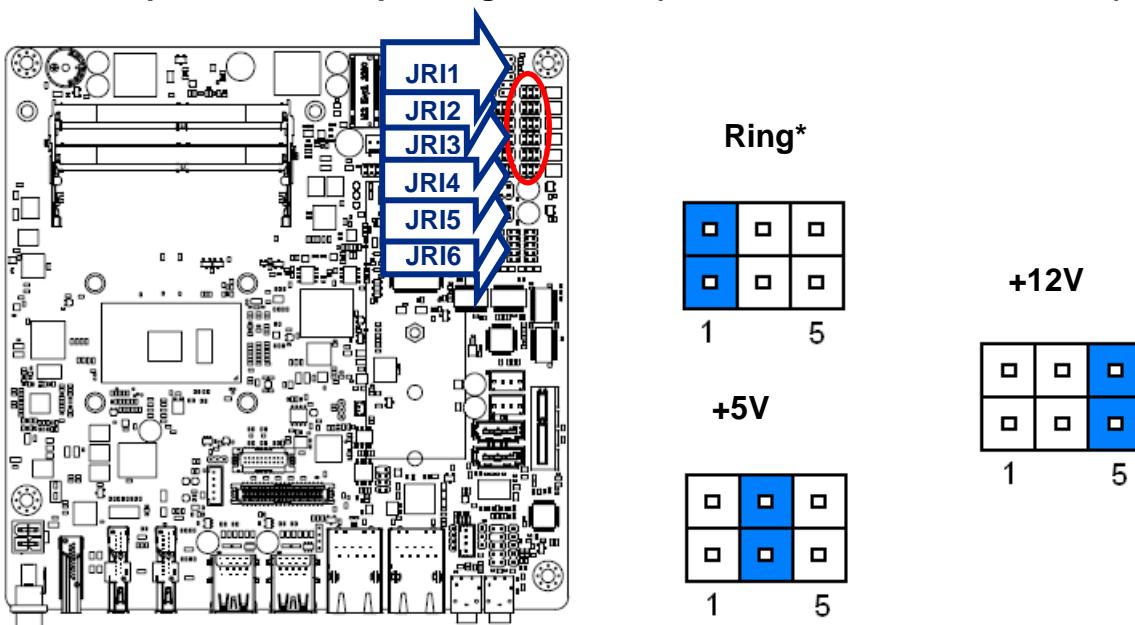


\* Default

### 2.6.2 LVDS Back Light power selection (JSBKL1)

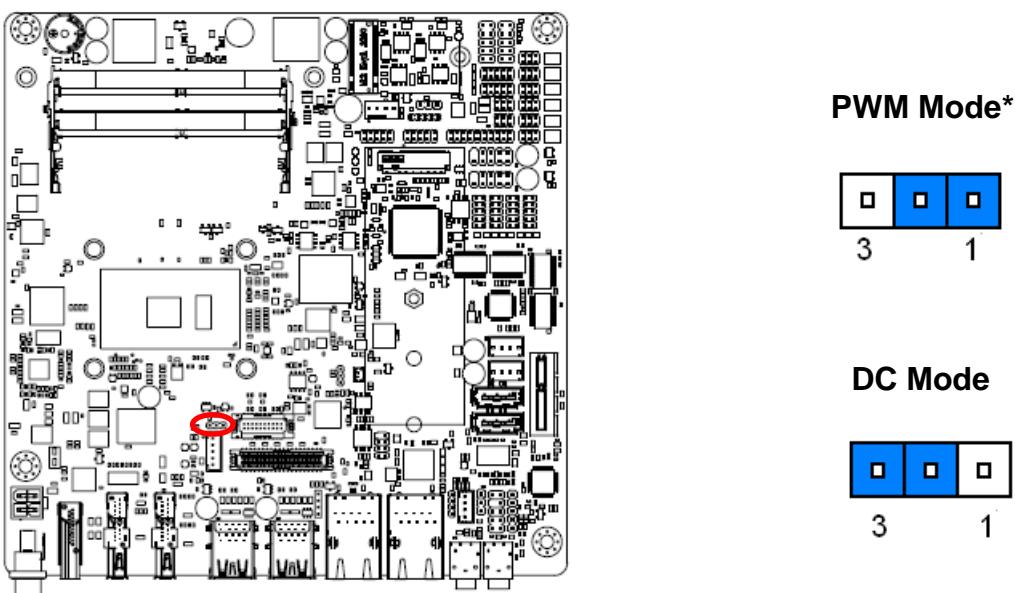


\* Default


### 2.6.3 AT/ATX Power Mode Select (JSATX1)

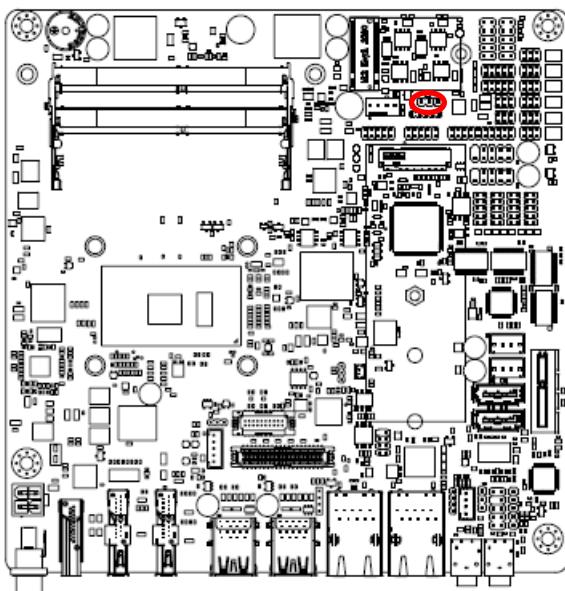

AT




ATX\*




\* Default


### 2.6.4 Clear CMOS (JCOMS1)

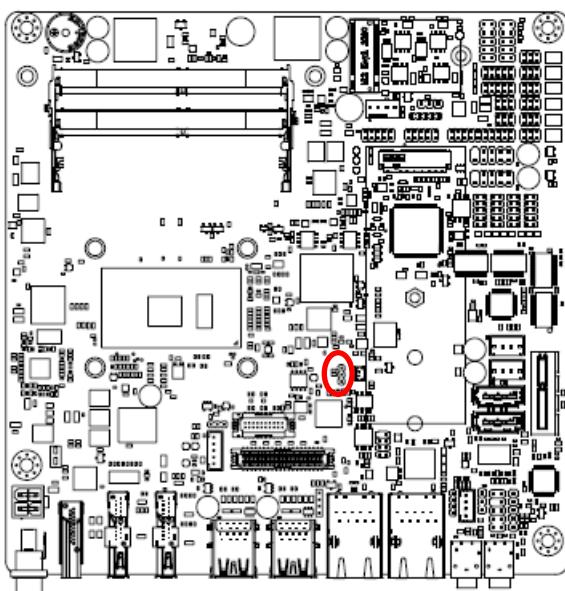

Protect\*





Clear CMOS





\* Default

## 2.6.5 LCD Inverter connector (JBKL1)

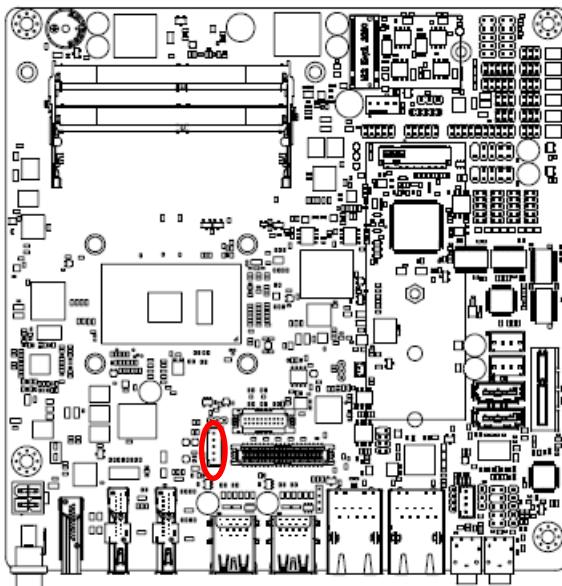



PIN	Signal	Max current
5	+5V	2A
4	LVDS_BKLTCTL	
3	LVDS_BKLT_EN	
2	GND	
1	+12V	2A

## 2.6.6 General purpose I/O connector (DIO1)

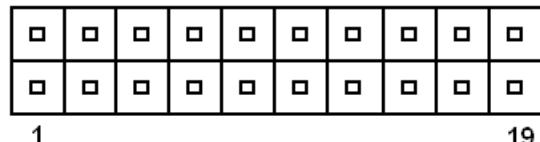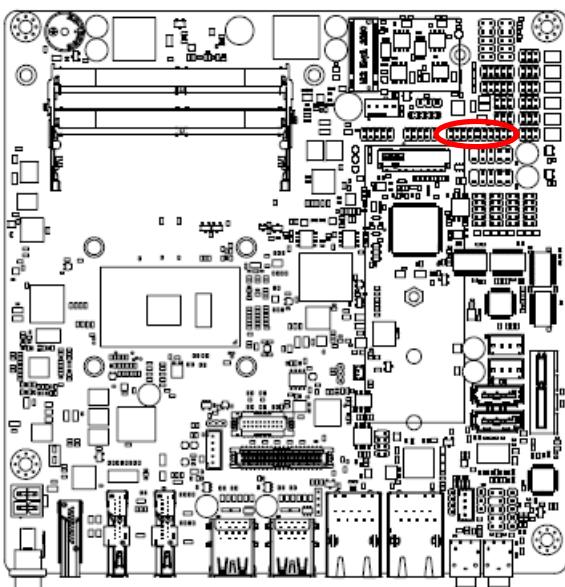



Signal	PIN	PIN	Signal
DI0	1	2	DO0
DI1	3	4	DO1
DI2	5	6	DO2
DI3	7	8	DO3
DI4	9	10	DO4
DI5	11	12	DO5
DI6	13	14	DO6
DI7	15	16	DO7
SMB_CLK_S	17	18	SMB_DATA_S
GND	19	20	+5V (Max current = 0.5A)

### 2.6.7 Serial port 1/2 connector (COM1/2)

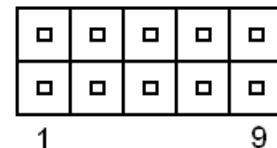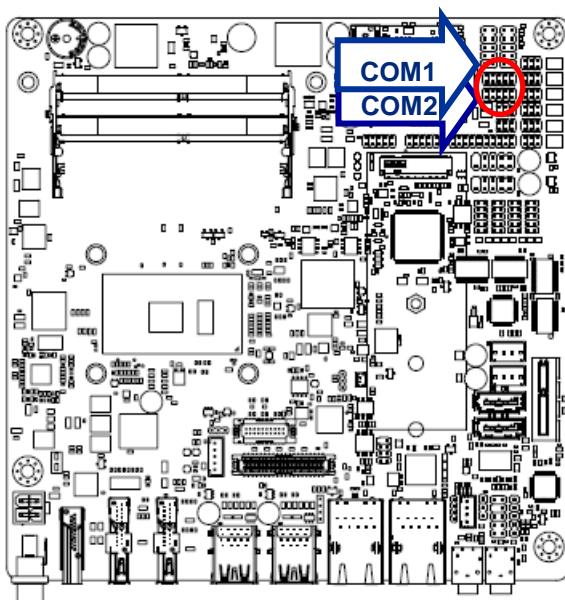



Signal	PIN	PIN	Signal
DCD	1	2	RXD
TXD	3	4	DTR
GND	5	6	DSR
RTS	7	8	CTS
RI (Max current = 0.5A)	9	10	NC

### 2.6.8 Serial port 3/4/5/6 connector (COM3/4/5/6)

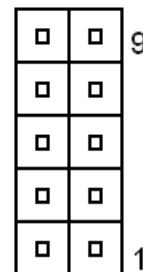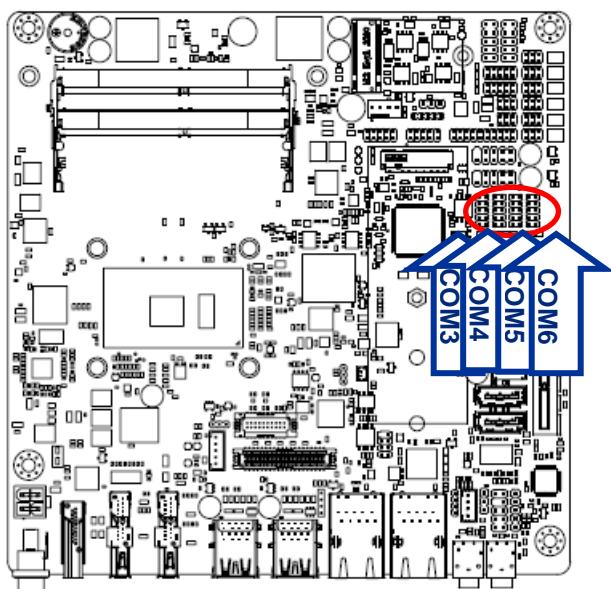



Signal	PIN	PIN	Signal
NC	10	9	RI (Max current = 0.5A)
CTS	8	7	RTS
DSR	6	5	GND
DTR	4	3	TXD
RXD	2	1	DCD

### 2.6.9 Serial Port 1/2 RS485/422 Mode connector (JRS485\_1/2)

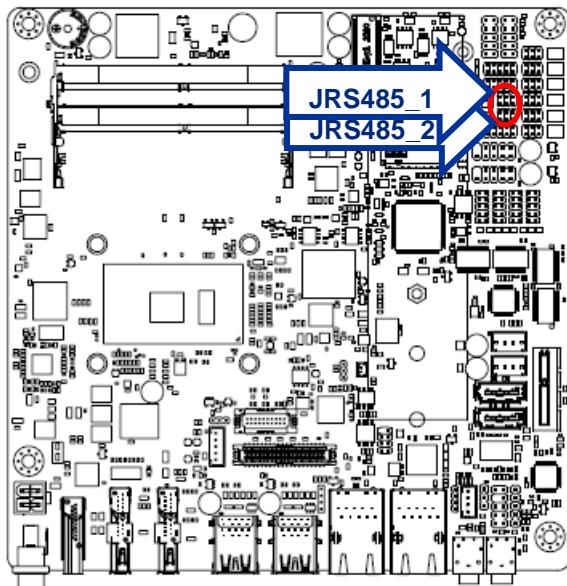



Signal	PIN	PIN	Signal
485_422TX-	1	2	422RX-
485_422TX+	3	4	422RX+
+5V (Max current = 0.5A)	5	6	GND

### 2.6.10 SATA Power connector 1/2 (SPWR1/2)

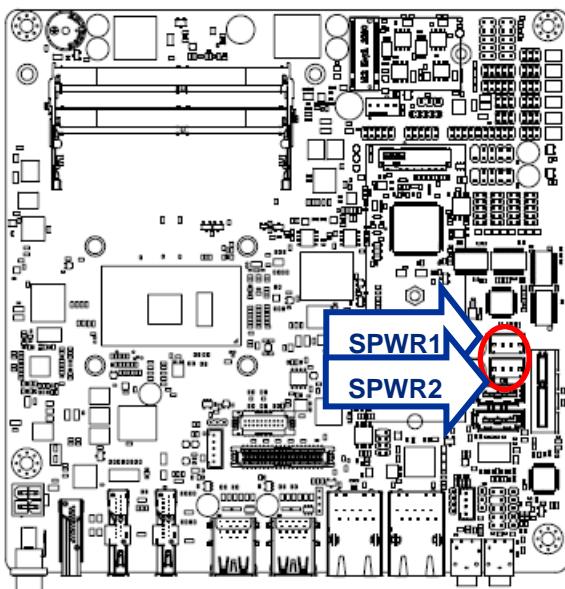



PIN	Signal	Max current
1	+V5S_SATA	1A
2	GND	
3	GND	
4	+V12S_SATA	1A

### 2.6.11 Power connector (PWR1)

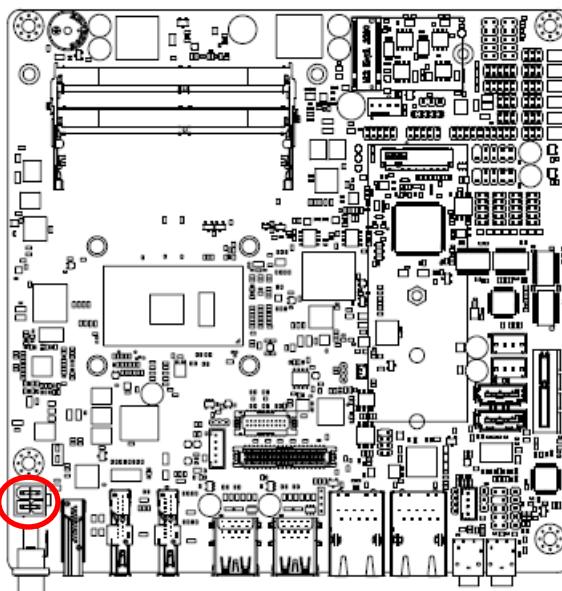



Signal	PIN	PIN	Signal
GND	2	4	+VIN
GND	1	3	+VIN

### 2.6.12 USB connector 3 (USB3)

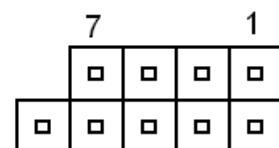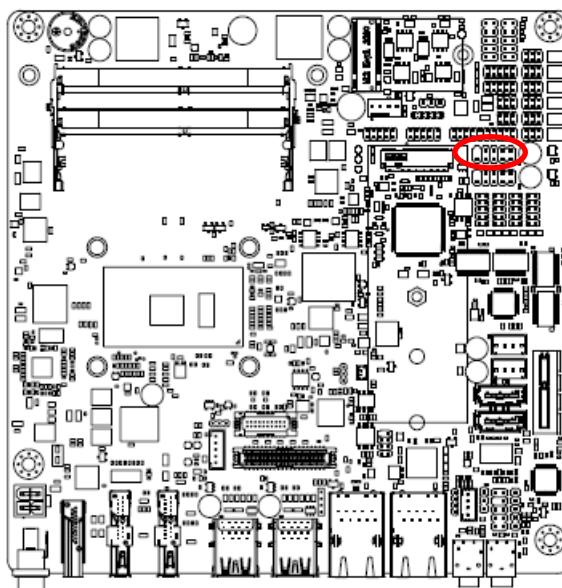


Signal	PIN	PIN	Signal
+V5A_USB78	1	2	+V5A_USB78
USB_DN7	3	4	USB_DN8
USB_DP7	5	6	USB_DP8
GND	7	8	GND
		10	NC

### 2.6.13 USB connector 4 (USB4)

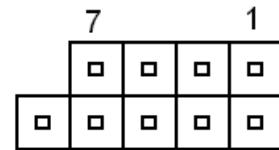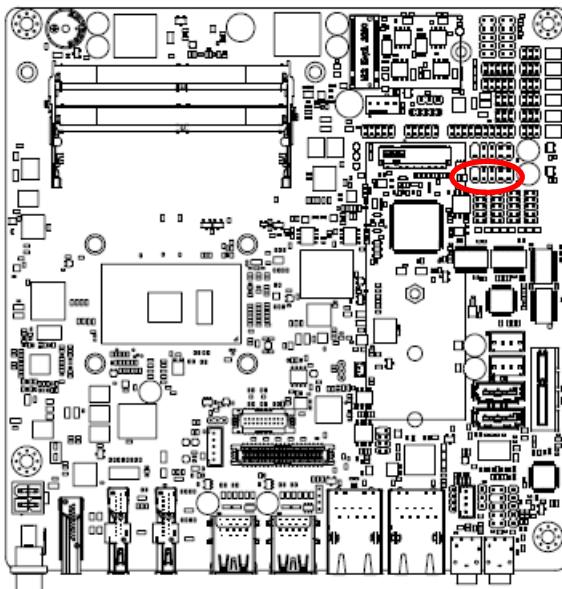



Signal	PIN	PIN	Signal
+V5A_USB78	1	2	+V5A_USB78
USB_DN9	3	4	USB_DN10
USB_DP9	5	6	USB_DP10
GND	7	8	GND
		10	NC

### 2.6.14 Battery connector (BT1)

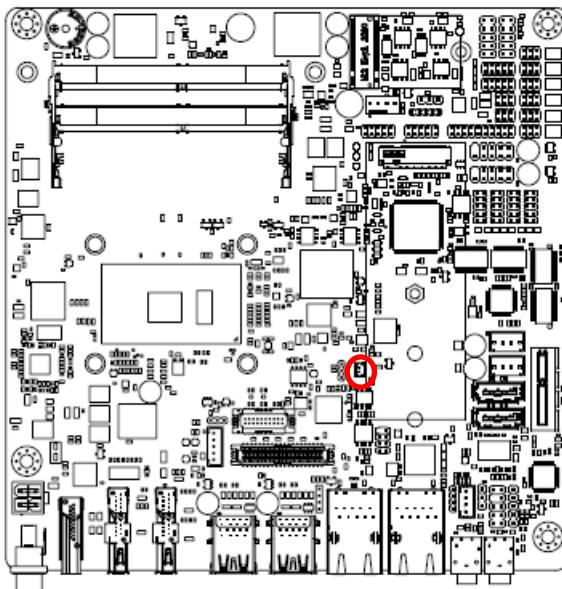



Signal	PIN
+3V	1
GND	2

### 2.6.15 LVDS connector (LVDS1)

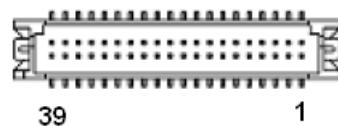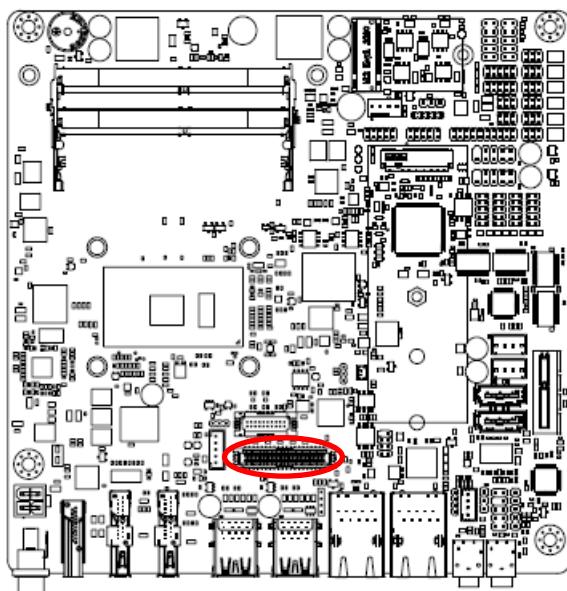



Signal	PIN	PIN	Signal
+5V	2	1	+3.3V
+5V	4	3	+3.3V
NC	6	5	NC
GND	8	7	GND
LVDS_DATA0_P	10	9	LVDS_DATA1_P
LVDS_DATA0_N	12	11	LVDS_DATA1_N
GND	14	13	GND
LVDS_DATA2_P	16	15	LVDS_DATA3_P
LVDS_DATA2_N	18	17	LVDS_DATA3_N
GND	20	19	GND
LVDS_DATA4_P	22	21	LVDS_DATA5_P
LVDS_DATA4_N	24	23	LVDS_DATA5_N
GND	26	25	GND
LVDS_DATA6_P	28	27	LVDS_DATA7_P
LVDS_DATA6_N	30	29	LVDS_DATA7_N
GND	32	31	GND
LVDS_CLK1_P	34	33	LVDS_CLK2_P
LVDS_CLK1_N	36	35	LVDS_CLK2_N
GND	38	37	GND
+12V	40	39	+12V

### 2.6.16 Audio connector (FAUD1)

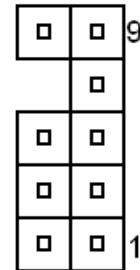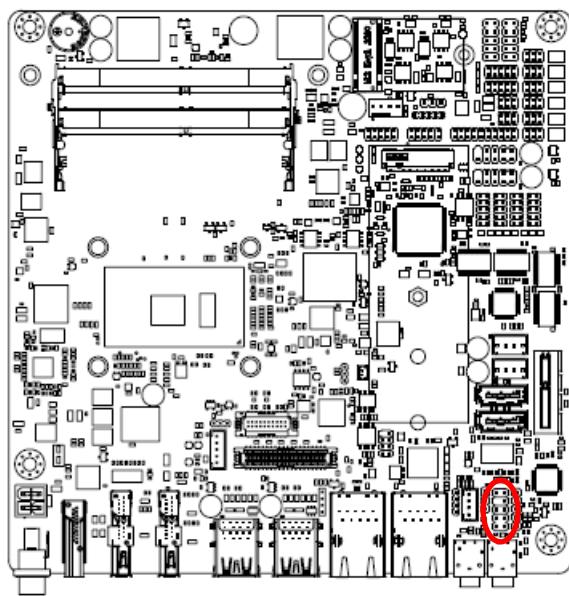



Signal	PIN	PIN	Signal
LINE2_JD	10	9	LINE2_LIN
		7	SENSE_B
MIC2_JD	6	5	LINE2_RIN
AUD_FRONT_DET	4	3	MIC2_RIN
GND	2	1	MIC2_LIN

### 2.6.17 EC Debug (JEC\_SPI)

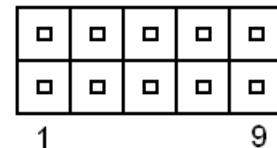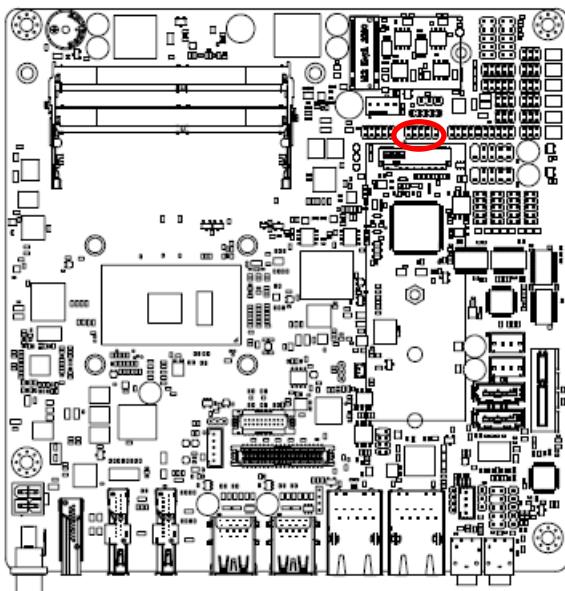



Signal	PIN	PIN	Signal
+3VSPI_EC	1	2	GND
EC_FSCE#	3	4	EC_FSCK
EC_FMISO	5	6	EC_FMOSI
EC_HOLD#	7	8	NC
EC_SMCLK	9	10	EC_SMDAT

### 2.6.18 SPI connector (JSPI1)

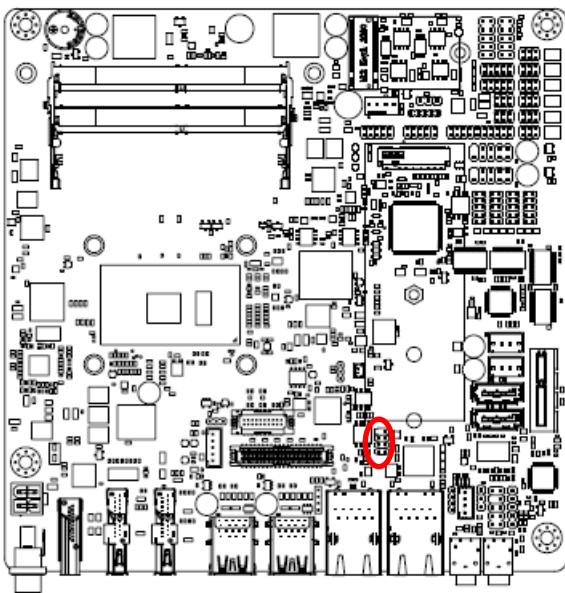



Signal	PIN	PIN	Signal
		7	HOLD#
SPI_SI	6	5	SPI_SO
SPI_CLK	4	3	SPI0_CS0#
GND	2	1	+3.3A_SPI

### 2.6.19 Sony/Philips Digital Interface (SPDIF1)

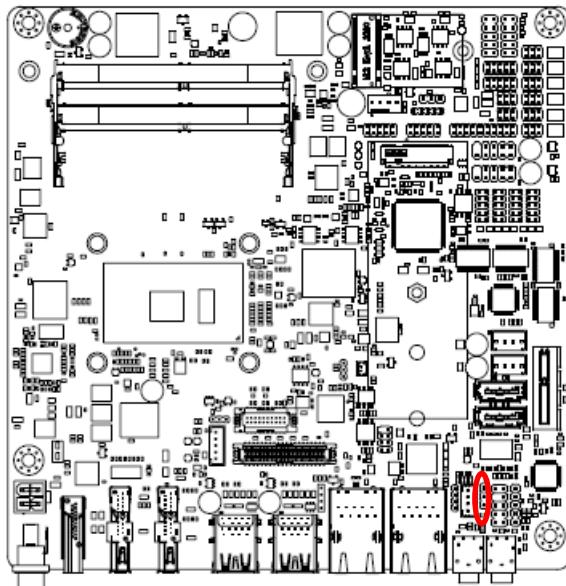



Signal	PIN
GND	3
SPDIF_OUT	2
+5V	1

### 2.6.20 Miscellaneous setting connector 1 (FPT1)

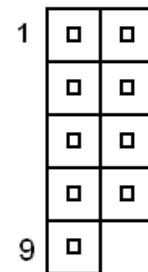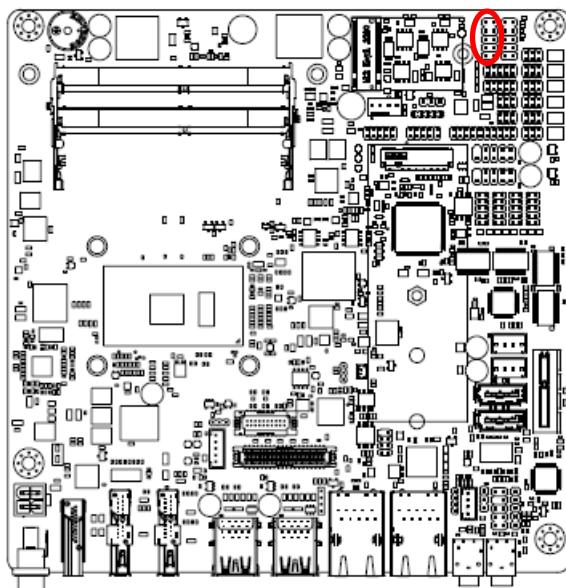

Signal	PIN	PIN	Signal
HD_LED+	1	2	PWR_LED+
HD_LED-	3	4	PWE_LED-
Reset+	5	6	PWR_BNT+
Reset-	7	8	PWR_BNT-
NC	9		

### 2.6.21 Miscellaneous setting connector 2 (FPT2)

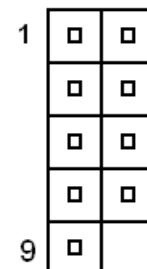
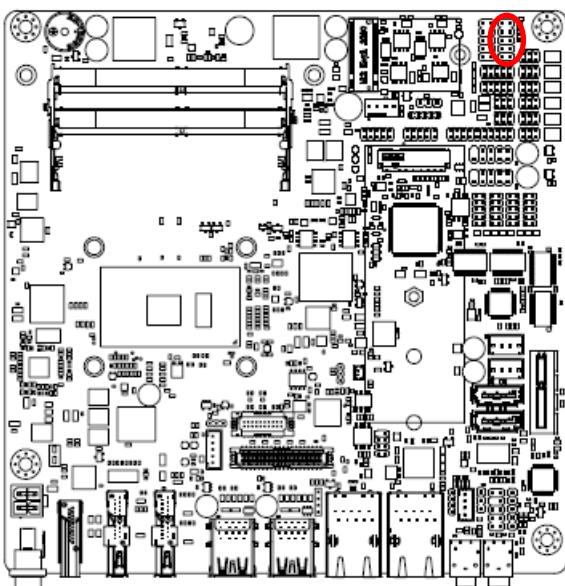


Signal	PIN	PIN	Signal
Speaker+	1	2	BLK_VR(10K)
NC	3	4	BLK_UP
NC	5	6	BLK_DN
Speaker-	7	8	GND
NC	9	10	

**Note:**



1. Pin2 with GND: Control LVDS Backlight by use Variable Resistor.
2. BLK\_UP with GND/BLK\_DN with GND: Step control LVDS Backlight by use button and BIOS must to be set “BR Button”. (Please refer to page.61)

### 2.6.22 LED indicator connector 1 (LED1)

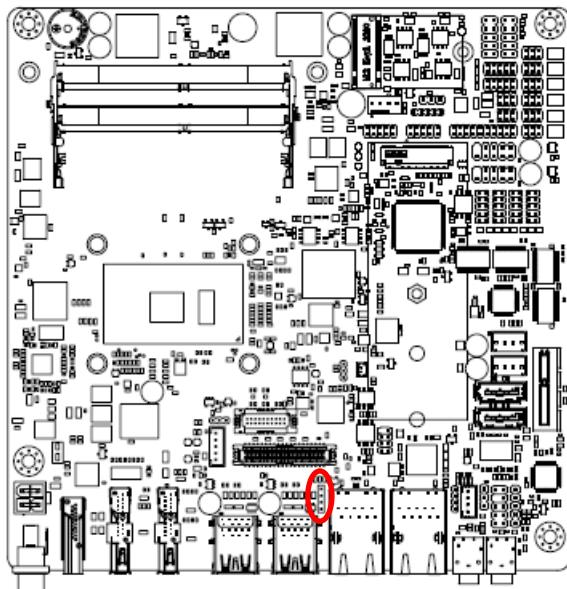


Signal	PIN
LAN1_1000#_LED	4
LAN1_100#_LED	3
LAN1_ACT_N	2
LAN1_ACT_P	1

### 2.6.23 LED indicator connector 2 (LED2)

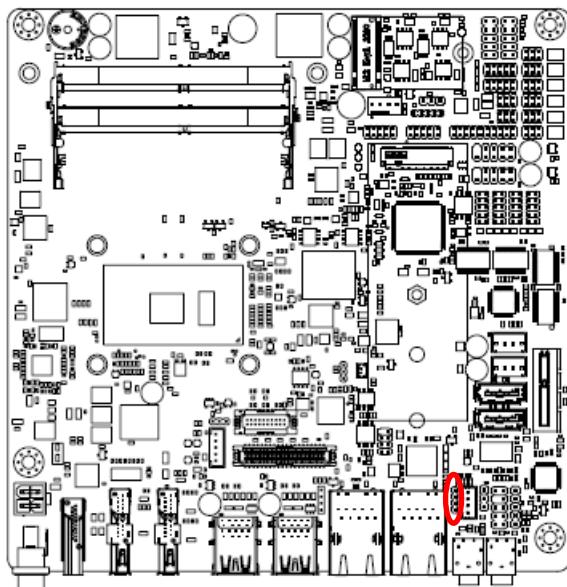



Signal	PIN
LAN2_1000#_LED	4
LAN2_100#_LED	3
LAN2_ACT_N	2
LAN2_ACT_P	1

### 2.6.24 Speaker connector (SPK1)

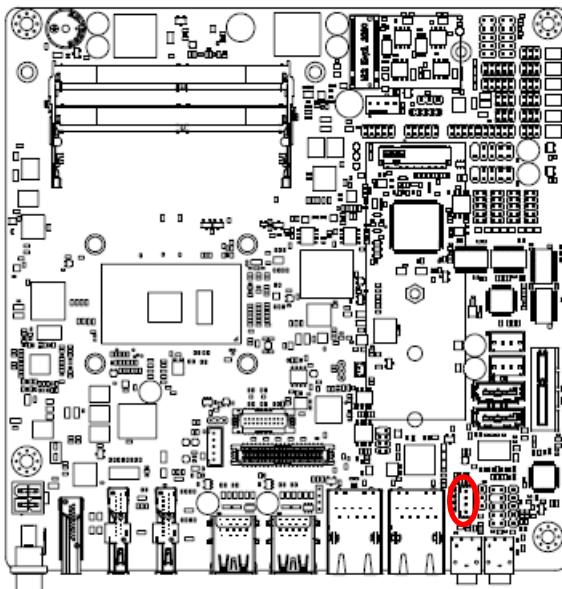



Signal	PIN
SPK_R-	4
SPK_R+	3
SPK_L-	2
SPK_L+	1

### 2.6.25 Mic-in connector (DMIC1)

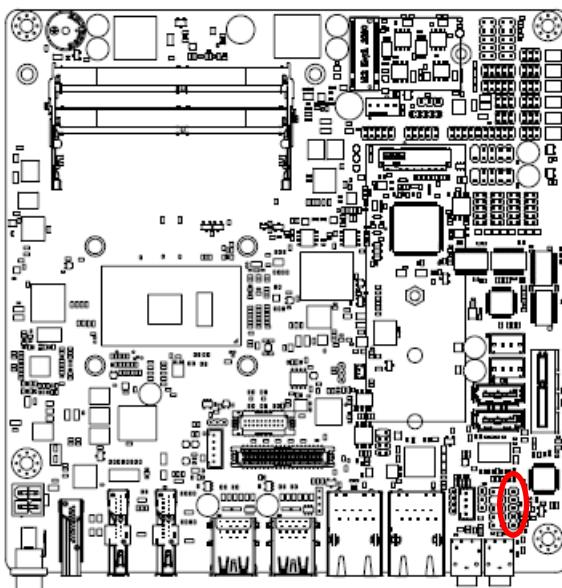



Signal	PIN
NC	5
DMIC_CLK	4
GND	3
DMIC_DATA	2
+3.3V	1

### 2.6.26 I2C connector (I2C1)

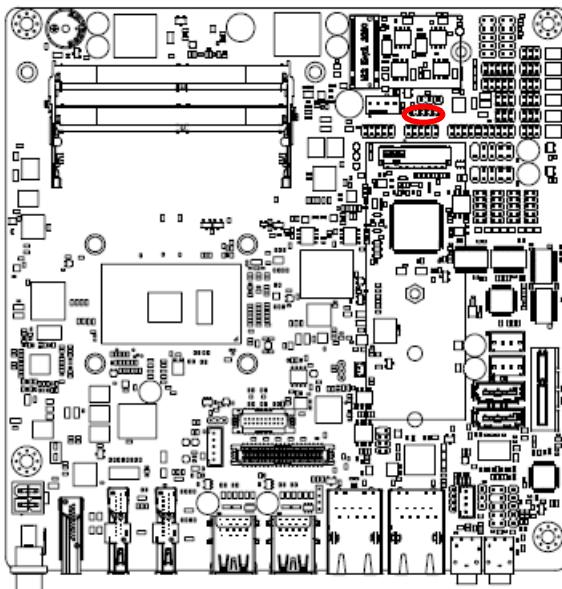

Signal	PIN
+3.3V	1
INT_I2C0#	2
I2C0_CLK	3
I2C0_DATA	4
GND	5

### 2.6.27 eDP\_Panel connector (EDP1)

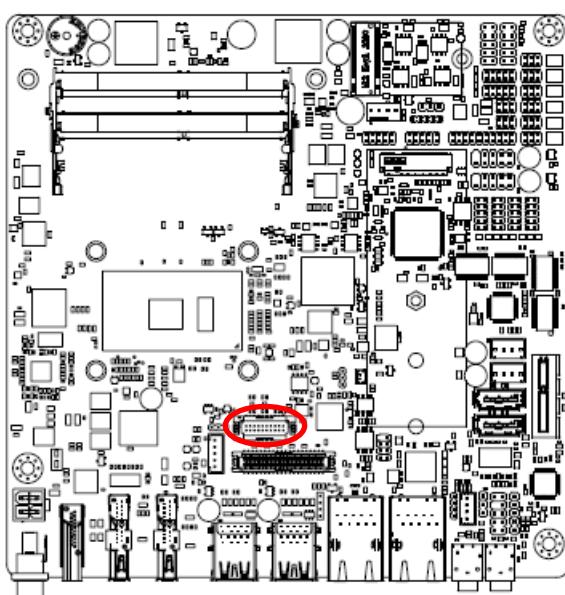



Signal	PIN	PIN	Signal
GND	1	2	GND
EDP_PanelTXN0	3	4	EDP_PanelTXN3
EDP_PanelTPX0	5	6	EDP_PanelTPX3
GND	7	8	NC
EDP_PanelTXN1	9	10	GND
EDP_PanelTPX1	11	12	EDP_PanelAUXN
GND	13	14	EDP_PanelAUXP
EDP_PanelTXN2	15	16	GND
EDP_PanelTPX2	17	18	EDP_Panel_HPD
+V3512_EDP	19	20	+V3512_EDP

#### Note:

Default 3.3V.



This a BOM optional part.

### 2.6.28 LPC connector (JLPC)

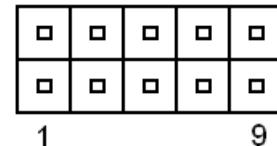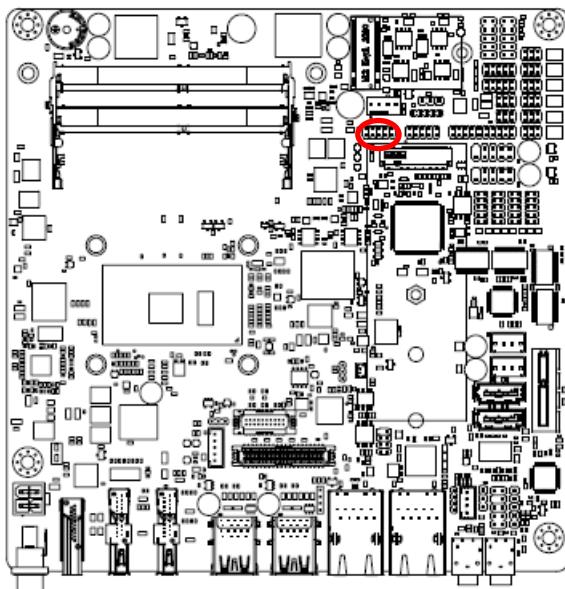


Signal	PIN	PIN	Signal
LPC_AD0	1	2	+3.3V
LPC_AD1	3	4	PCH_PLTRST#
LPC_AD2	5	6	LPC_FRAME#
LPC_AD3	7	8	LPC_CLK
LPC_SERIRQ	9	10	GND

### 2.6.29 CPU fan connector (FAN1)

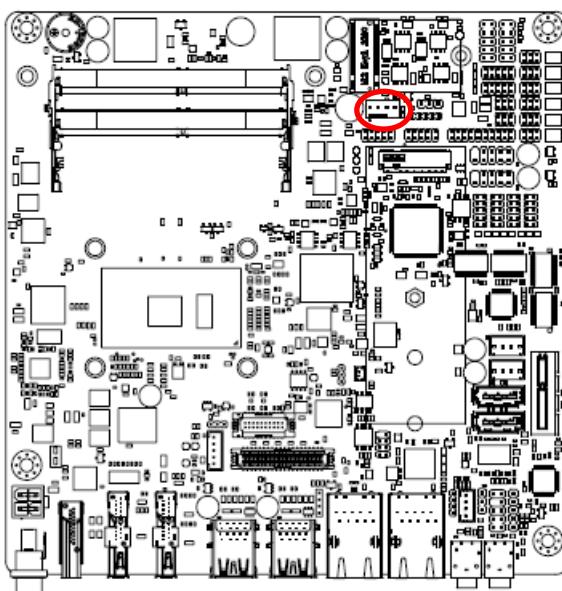

Signal	PIN
GND	1
+12V	2
CPU_FANIN	3
FAN_PWM0	4

### 2.6.30 HDMI1/DP1/DP2/LVDS1

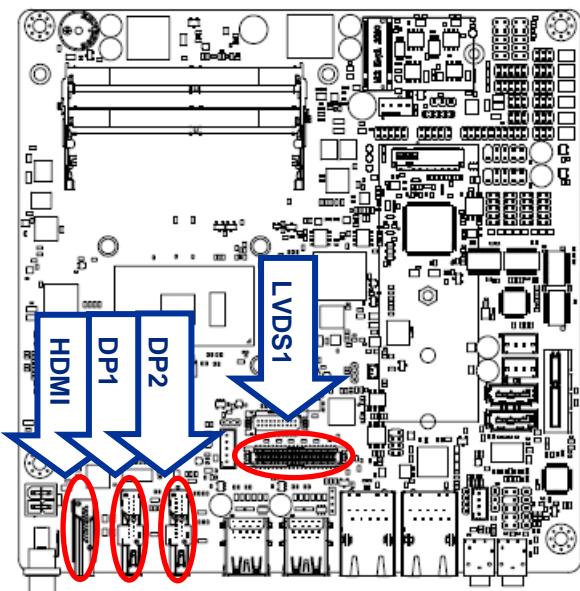

Display	Location
HDMI	HDMI1
DP	DP1
DP++	DP2
LVDS	LVDS1

Display: 1 x DP++(DP2 connector), 1 x HDMI(HDMI1 connector), 1 x DP (DP1 connector), LVDS(LVDS1 connector)

Note: HDMI1 and DP1 share one circuit for display output depending on which monitor input is engaged. (Only one display port can be output, HDMI1 or DP1)

#### Triple display:

HDMI & DP++ & LVDS

DP & DP++ & LVDS

## 3.BIOS Setup

### **3.1 Introduction**

The BIOS setup program allows users to modify the basic system configuration. In this following chapter will describe how to access the BIOS setup program and the configuration options that may be changed.

### **3.2 Starting Setup**

The AMI BIOS™ is immediately activated when you first power on the computer. The BIOS reads the system information contained in the NVRAM and begins the process of checking out the system and configuring it. When it finishes, the BIOS will seek an operating system on one of the disks and then launch and turn control over to the operating system.

While the BIOS is in control, the Setup program can be activated in one of two ways:

By pressing <Del> or <F2> immediately after switching the system on, or

By pressing the <Del> or <F2> key when the following message appears briefly at the left-top of the screen during the POST (Power On Self Test).

**Press <Del> or <F2> to enter SETUP**

If the message disappears before you respond and you still wish to enter Setup, restart the system to try again by turning it OFF then ON or pressing the "RESET" button on the system case. You may also restart by simultaneously pressing <Ctrl>, <Alt>, and <Delete> keys. If you do not press the keys at the correct time and the system does not boot, an error message will be displayed and you will again be asked to.

**Press F1 to Continue, DEL to enter SETUP**

### 3.3 Using Setup

In general, you use the arrow keys to highlight items, press <Enter> to select, use the PageUp and PageDown keys to change entries, press <F1> for help and press <Esc> to quit. The following table provides more detail about how to navigate in the Setup program using the keyboard.

Button	Description
↑↓←→	Move
Enter	Select
+/-	Value
Esc	Exit
F1	General Help
F2	Previous Values
F3	Optimized Defaults
F4	Save & Exit Setup
<K>	Scroll help area upwards
<M>	Scroll help area downwards

- **Navigating Through The Menu Bar**

Use the left and right arrow keys to choose the menu you want to be in.



**Note:** Some of the navigation keys differ from one screen to another.

- **To Display a Sub Menu**

Use the arrow keys to move the cursor to the sub menu you want. Then press <Enter>. A “>” pointer marks all sub menus.

### 3.4 Getting Help

Press F1 to pop up a small help window that describes the appropriate keys to use and the possible selections for the highlighted item. To exit the Help Window press <Esc> or <Enter> key.

### 3.5 In Case of Problems

If, after making and saving system changes with Setup, you discover that your computer no longer is able to boot, the AMI BIOS supports an override to the NVRAM settings which resets your system to its defaults.



The best advice is to only alter settings which you thoroughly understand. To this end, we strongly recommend that you avoid making any changes to the chipset defaults. These defaults have been carefully chosen by both BIOS Vendor and your systems manufacturer to provide the absolute maximum performance and reliability. Even a seemingly small change to the chipset setup has the potential for causing you to use the override.

## 3.6 BIOS setup

Once you enter the Aptio Setup Utility, the Main Menu will appear on the screen. The Main Menu allows you to select from several setup functions and exit choices. Use the arrow keys to select among the items and press <Enter> to accept and enter the sub-menu.

### 3.6.1 Main Menu

This section allows you to record some basic hardware configurations in your computer and set the system clock.

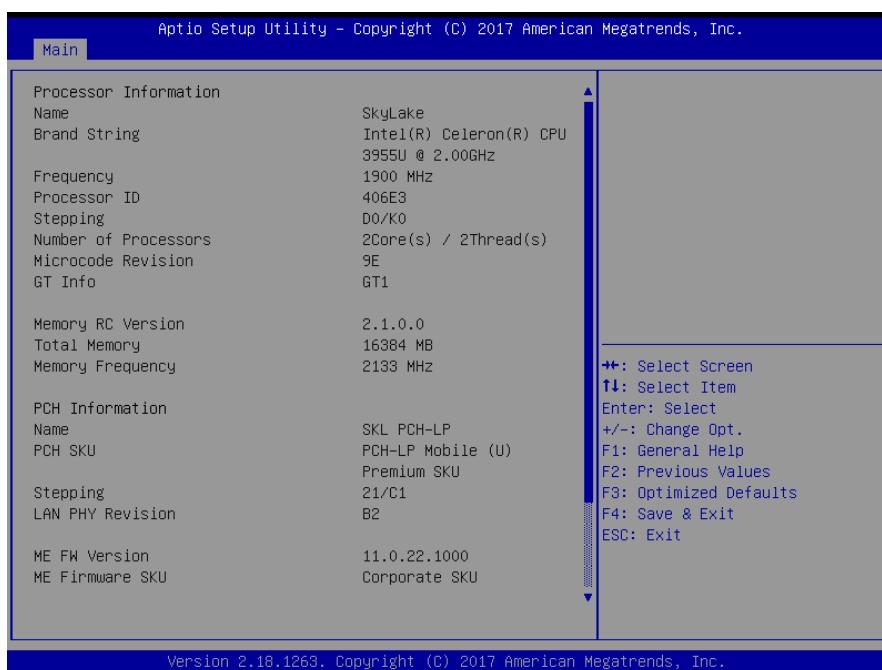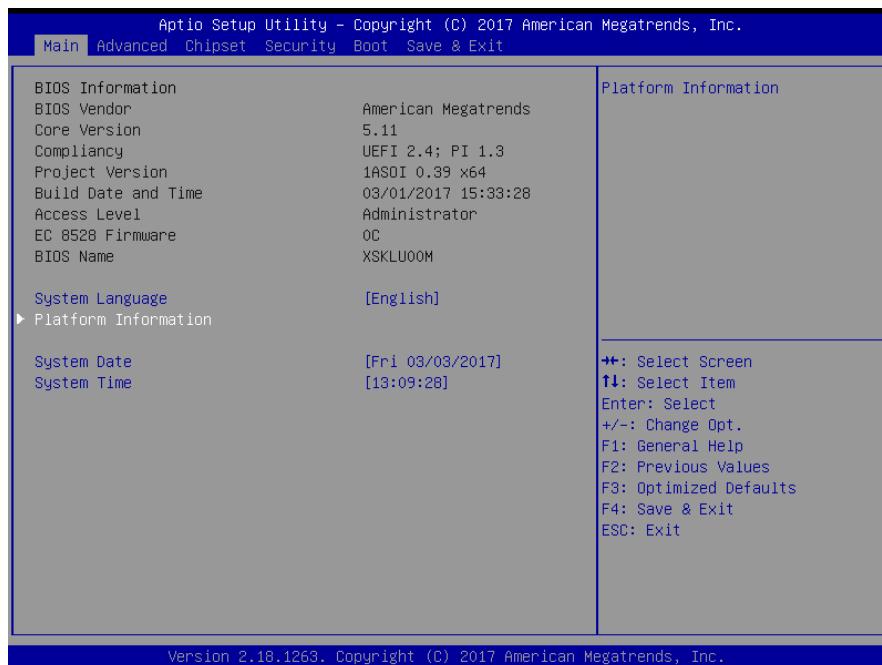

### 3.6.1.1 System Language

This option allows choosing the system default language.

### 3.6.1.2 System Date

Use the system date option to set the system date. Manually enter the day, month and year.

### 3.6.1.3 System Time


Use the system time option to set the system time. Manually enter the hours, minutes and seconds.




**Note:** The BIOS setup screens shown in this chapter are for reference purposes only, and may not exactly match what you see on your screen.  
Visit the Avalue website ([www.alue.com.tw](http://www.alue.com.tw)) to download the latest product and BIOS information.

## 3.6.2 Advanced Menu

This section allows you to configure your CPU and other system devices for basic operation through the following sub-menus.

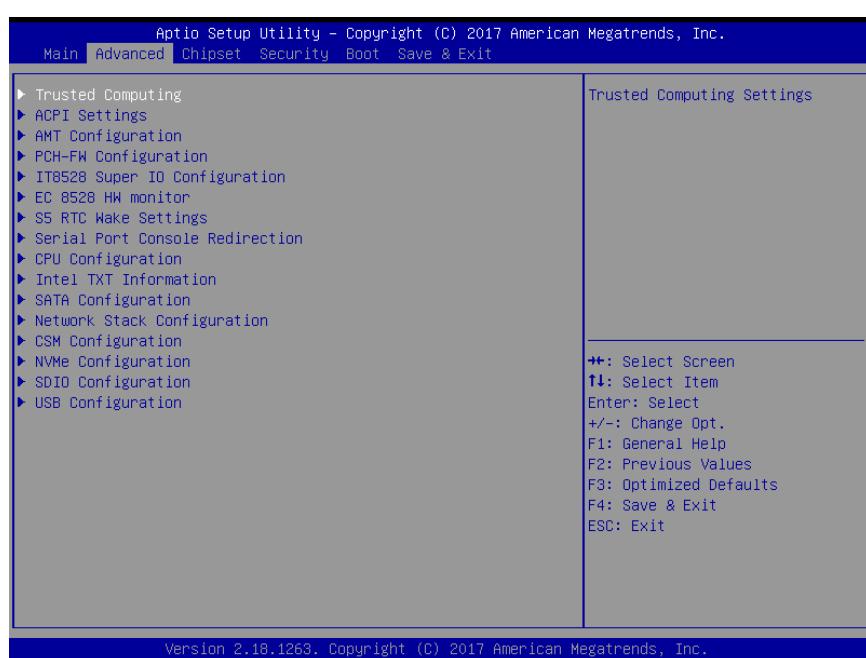


### 3.6.2.1 Trusted Computing

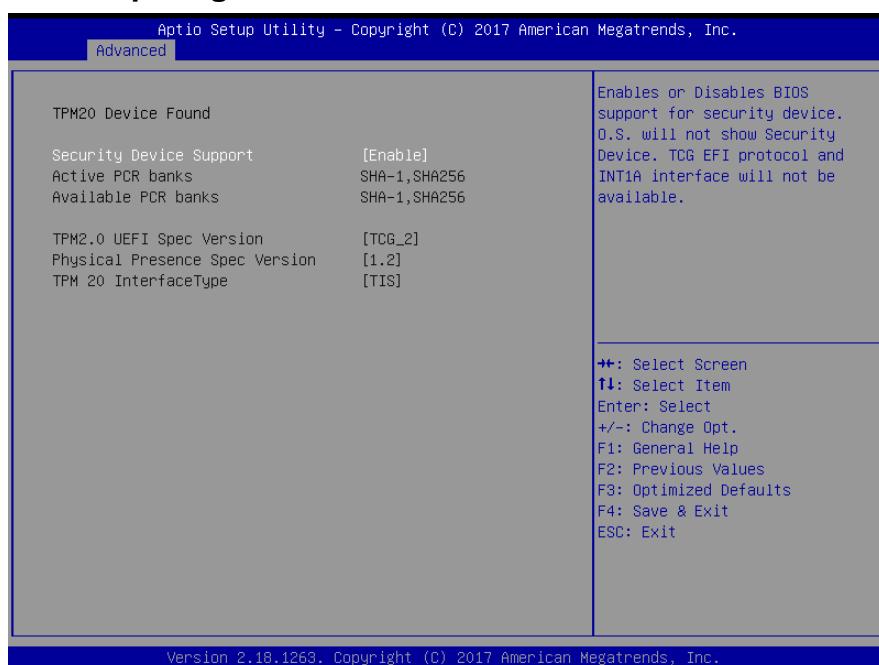


Item	Options	Description
<b>Security Device Support</b>	Disable Enable <b>[Default]</b>	Enables or Disables BIOS support for security devices. O.S. will not show Security Device. TCG EFI protocol and INT1A interface will not be available.

### 3.6.2.2 APCI Settings

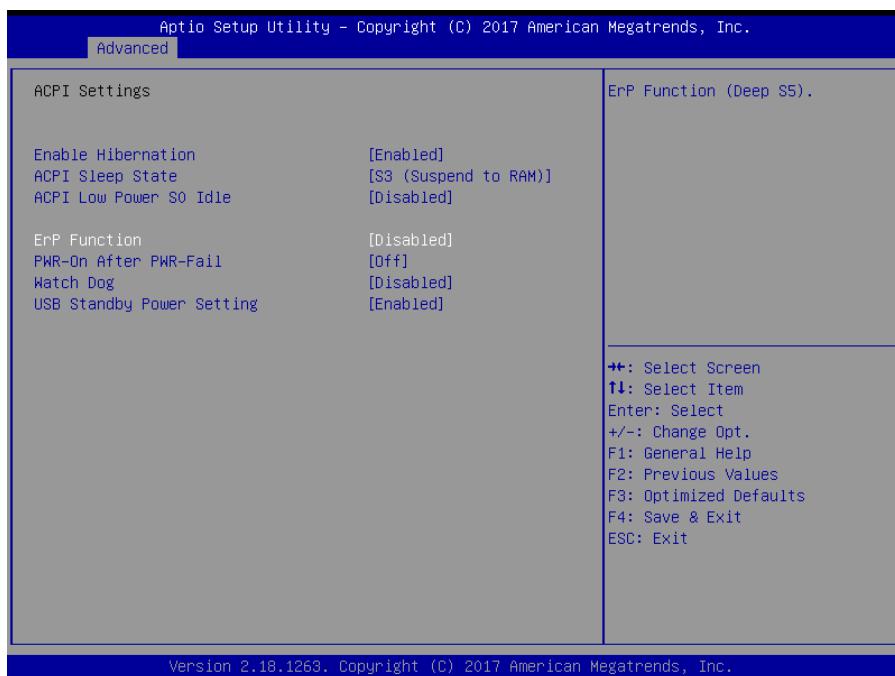


Item	Options	Description
<b>Enable Hibernation</b>	Disabled Enabled[ <b>Default</b> ],	Enables or Disables System ability to Hibernate (OS/S4 Sleep State). This option may be not effective with some OS.
<b>ACPI Sleep State</b>	Suspend Disabled, S3 (Suspend to RAM)[ <b>Default</b> ]	Select the highest ACPI sleep state the system will enter when the SUSPEND button is pressed.
<b>ACPI Low Power S0 Idle</b>	Disabled[ <b>Default</b> ] Enabled,	Enable or Disable ACPI Low Power S0 Idle Support.
<b>ErP Function</b>	Disabled[ <b>Default</b> ] Enabled,	ErP Function (Deep S5).
<b>PWR-On After PWR-Fail</b>	Off[ <b>Default</b> ] On Last state	AC loss resume.
<b>Watch Dog</b>	Disabled[ <b>Default</b> ], 30 sec 40 sec 50 sec 1 min 2 min 10 min 30 min	Select WatchDog.
<b>USB Standby Power Setting</b>	Disabled Enabled[ <b>Default</b> ]	Enabled/Disabled USB Standby Power during S3/S4/S5.

### 3.6.2.3 AMT Configuration

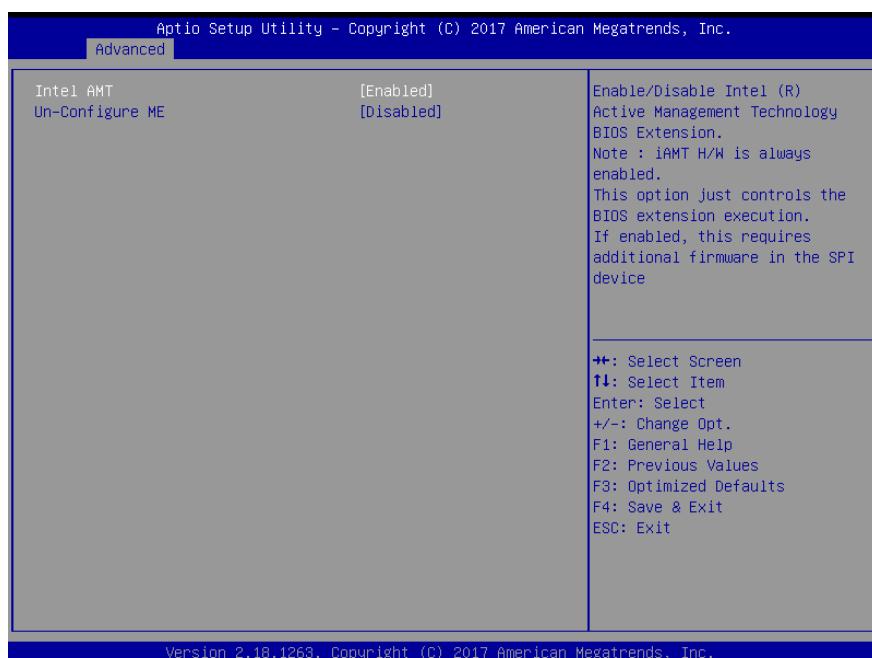

Item	Options	Description
<b>Intel AMT</b>	Disabled Enabled[ <b>Default</b> ],	Enable/Disable Intel® Active Management Technology BIOS Extension. Note: iAMT H/W is always enabled. This option just controls the BIOS extension execution. If enabled, this requires additional firmware in the SPI device.
<b>Un-Configure ME</b>	Disabled[ <b>Default</b> ] Enabled,	OEMFlag Bit 15: Un-Configure ME without password.

### 3.6.2.4 PCH-FW Configuration

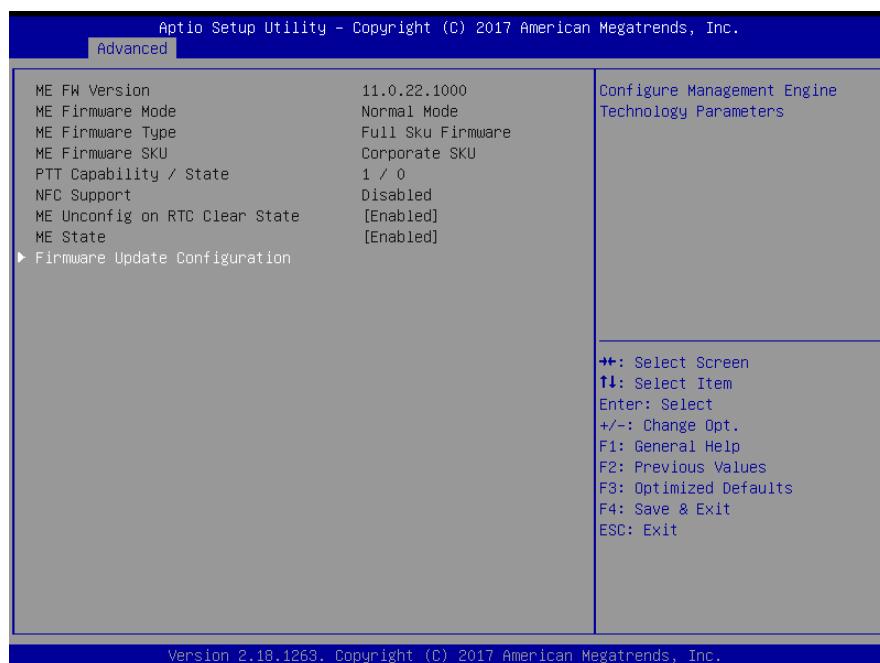

#### 3.6.2.4.1 Firmware Update Configuration




Item	Options	Description
<b>Me FW Image Re-Flash</b>	Disabled[ <b>Default</b> ], Enabled	Enable/Disable Me FW Image Re-Flash function.

### 3.6.2.5 IT8528 Super IO Configuration

You can use this item to set up or change the IT8528 Super IO configuration for serial ports.

Please refer to 3.6.2.5.1~ 3.6.2.5.6 for more information.

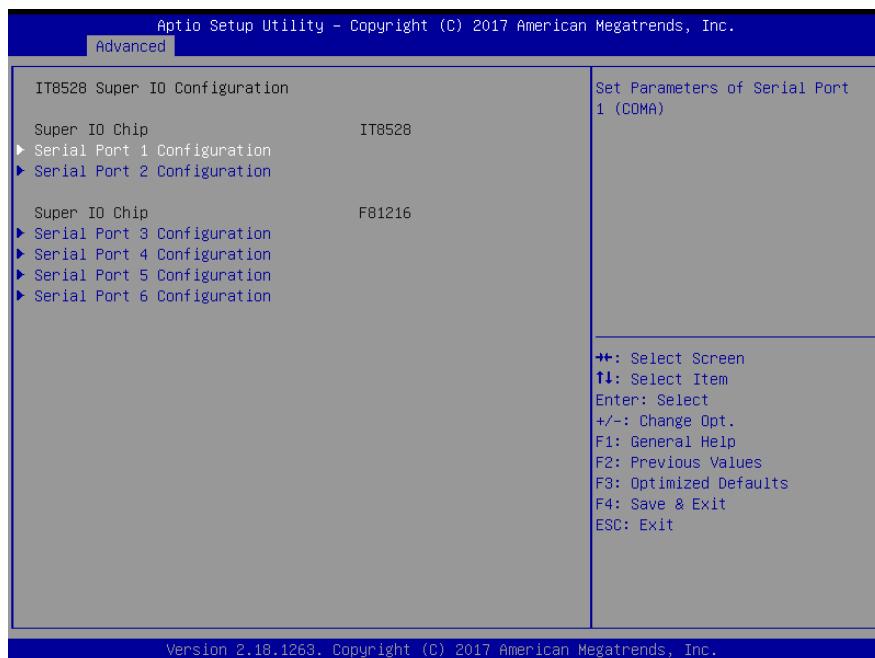

Item	Description
<b>Serial Port 1 Configuration</b>	Set Parameters of Serial Port 1 (COMA).
<b>Serial Port 2 Configuration</b>	Set Parameters of Serial Port 2 (COMB).
<b>Serial Port 3 Configuration</b>	Set Parameters of Serial Port 3 (COMC).
<b>Serial Port 4 Configuration</b>	Set Parameters of Serial Port 4 (COMD).
<b>Serial Port 5 Configuration</b>	Set Parameters of Serial Port 5 (COME).
<b>Serial Port 6 Configuration</b>	Set Parameters of Serial Port 6 (COMF).

### 3.6.2.5.1 Serial Port 1 Configuration




Item	Option	Description
<b>Serial Port</b>	Enabled[Default], Disabled	Enable or Disable Serial Port (COM).
<b>UART 232 422 485</b>	UART 232 UART 422, UART 485[Default],	Change the Serial Port as RS232/422/485.

### 3.6.2.5.2 Serial Port 2 Configuration




Item	Option	Description
<b>Serial Port</b>	Enabled[ <b>Default</b> ], Disabled	Enable or Disable Serial Port (COM).
<b>UART 232 422 485</b>	UART 232[ <b>Default</b> ], UART 422, UART 485	Change the Serial Port as RS232/422/485.

### 3.6.2.5.3 Serial Port 3 Configuration

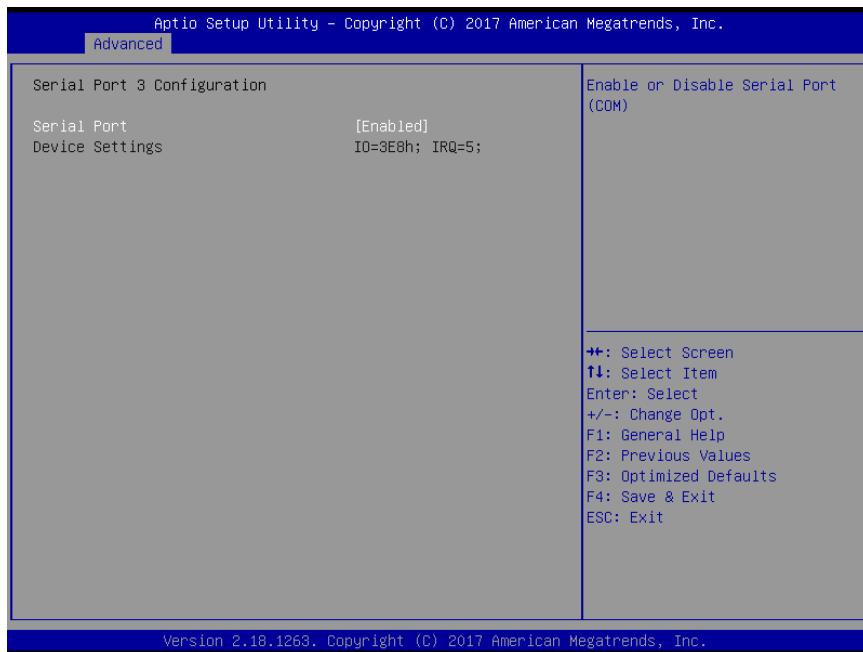


Item	Option	Description
<b>Serial Port</b>	Enabled[ <b>Default</b> ], Disabled	Enable or Disable Serial Port (COM).

### 3.6.2.5.4 Serial Port 4 Configuration

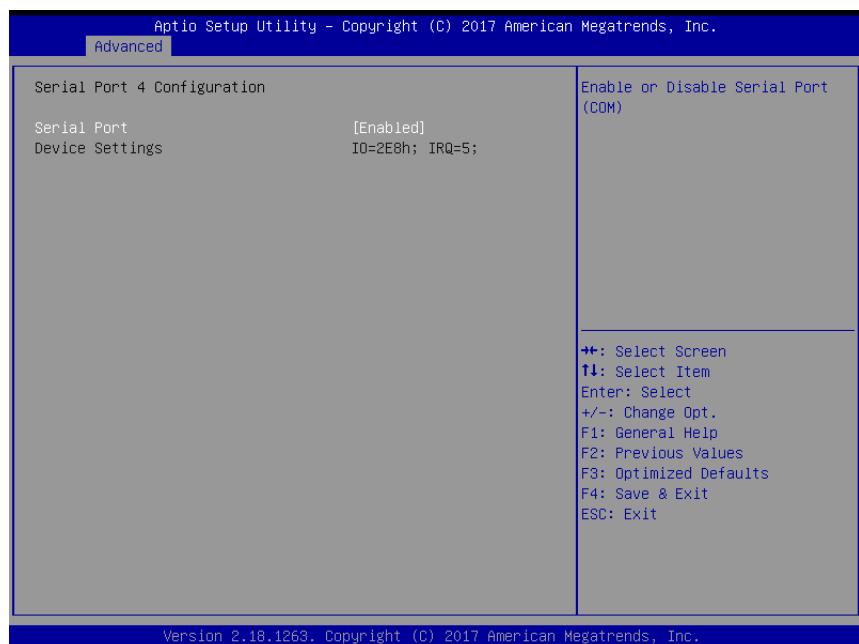


Item	Option	Description
Serial Port	Enabled[Default], Disabled	Enable or Disable Serial Port (COM).

### 3.6.2.5.5 Serial Port 5 Configuration

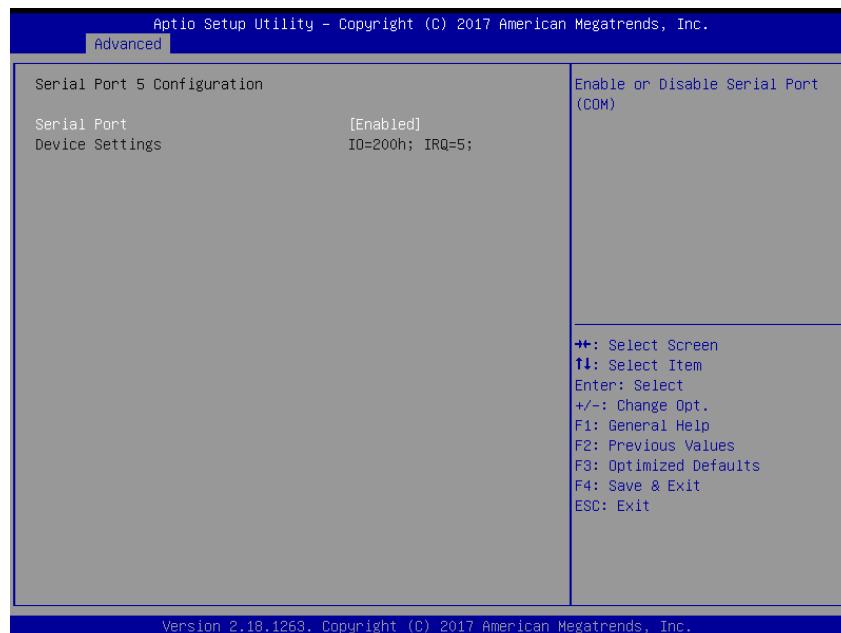


Item	Option	Description
Serial Port	Enabled[Default], Disabled	Enable or Disable Serial Port (COM).

### 3.6.2.5.6 Serial Port 6 Configuration

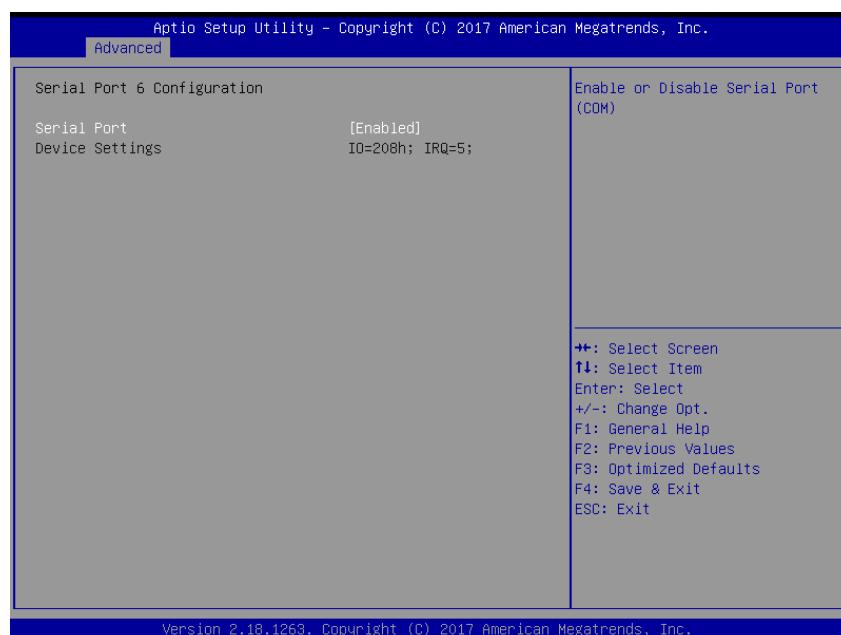


Item	Option	Description
Serial Port	Enabled[Default], Disabled	Enable or Disable Serial Port (COM).

### 3.6.2.6 H/W Monitor

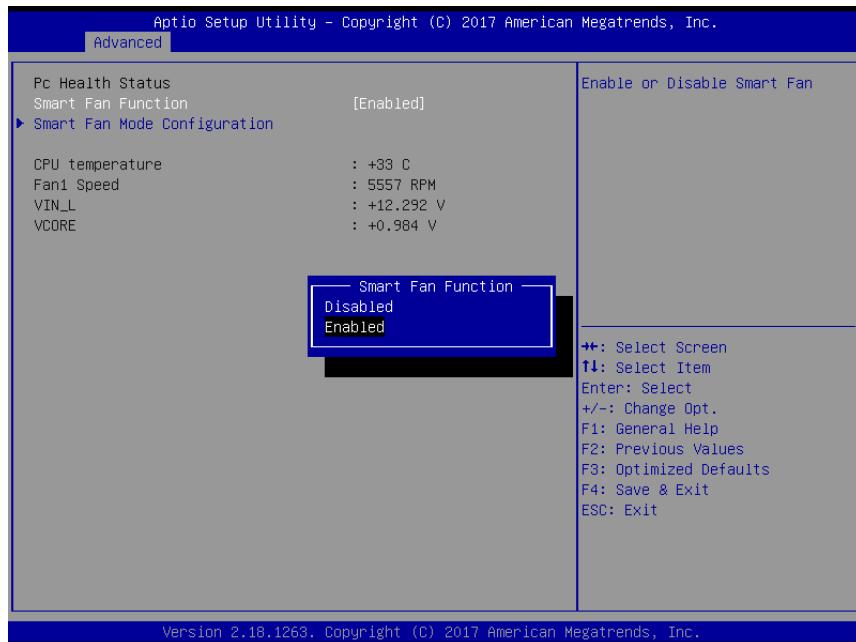


Item	Options	Description
Smart Fan Function	Disabled[Default], Enabled	Enable or Disable Smart Fan.

#### 3.6.2.6.1 Smart Fan Mode Configuration

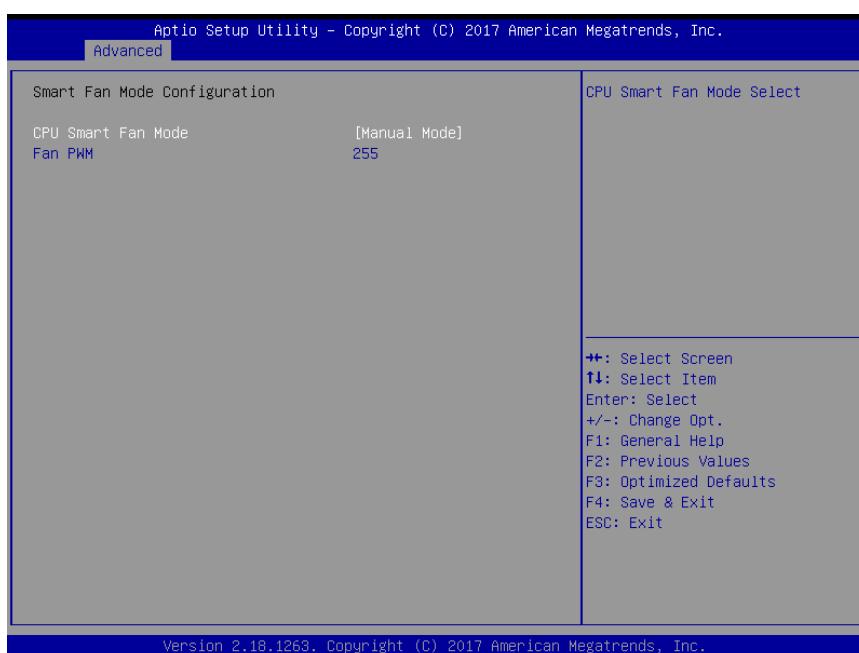


Item	Option	Description
<b>CPU Smart Fan Mode</b>	Manual Mode[ <b>Default</b> ]/Mode 01/Mode 02/Mode 03/Mode 04/Mode 05/Mode 06/Mode 07/Mode 08/Mode 09/Mode 10/Mode 11/Mode 12/Mode 13/Mode 14/Mode 15/Mode 16/Mode 17/Mode 18/Mode 19/Mode 20	CPU Smart Fan Mode Select.
<b>Fan PWM</b>	0-255	Fan PWM duty

### 3.6.2.7 S5 RTC Wake Settings

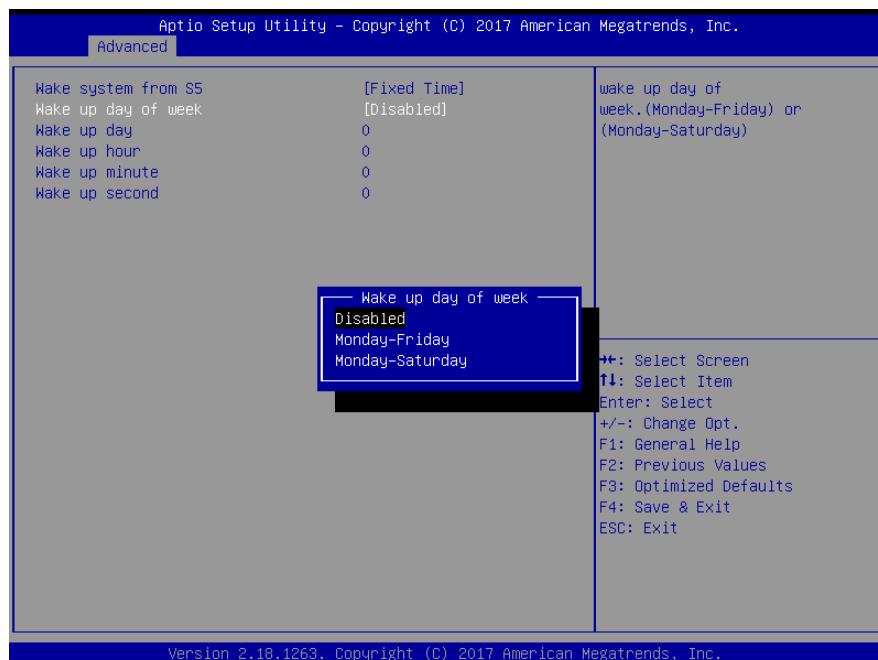


Item	Options	Description
<b>Wake system from S5</b>	Disabled[ <b>Default</b> ], Fixed Time Dynamic Time	Enable or disable System wake on alarm event. Select FixedTime, system will wake on the hr::min::sec specified. Select DynamicTime, System will wake on the current time + Increase minutes(s).
<b>Wake up day of week</b>	Disabled[ <b>Default</b> ], Monday-Friday Monday-Saturday	Wake up day of week. (Monday-Friday) or (Monday-Saturday).
<b>Wake up day</b>	1-31	Select 0 for daily system wake up 1-31 for which day of the month that you would like the system to wake up.
<b>Wake up hour</b>	0-23	Select 0-23 For example enter 3 for 3am and 15 for 3pm.
<b>Wake up minute</b>	0-59	Select 0-23 For example enter 3 for 3am and 15 for 3pm.
<b>Wake up second</b>	0-59	Select 0-23 For example enter 3 for 3am and 15 for 3pm.

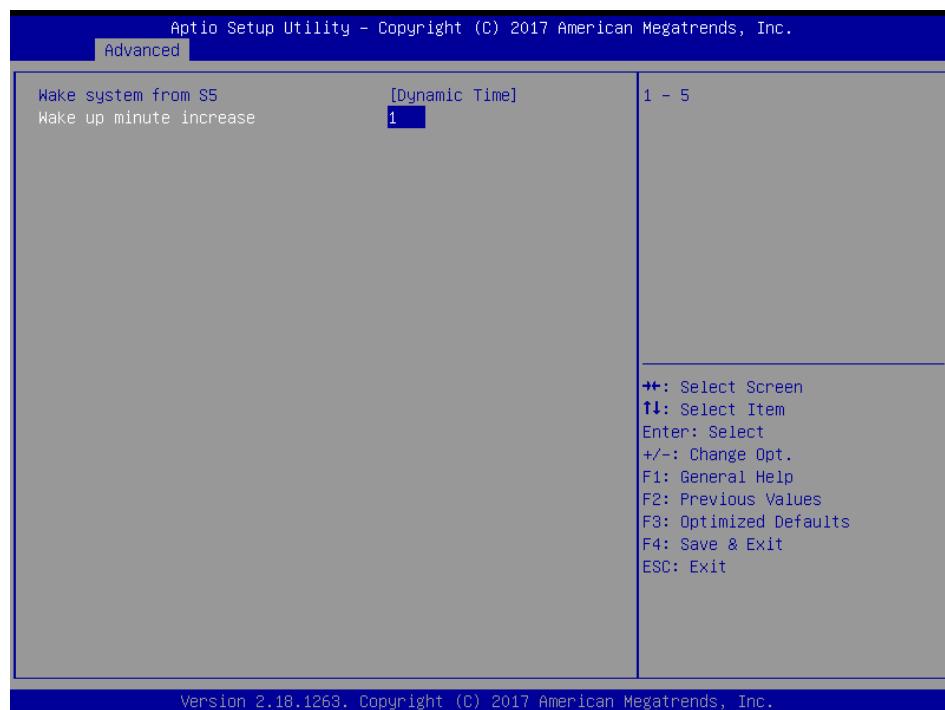


Item	Options	Description
<b>Wake system from S5</b>	Disabled, Fixed Time Dynamic Time <b>[Default]</b>	Enable or disable System wake on alarm event. Select FixedTime, system will wake on the hr::min::sec specified. Select DynamicTime, System will wake on the current time + Increase minutes(s).
<b>Wake up minute increase</b>	1-5	1-5.

### 3.6.2.8 Serial Port Console Redirection

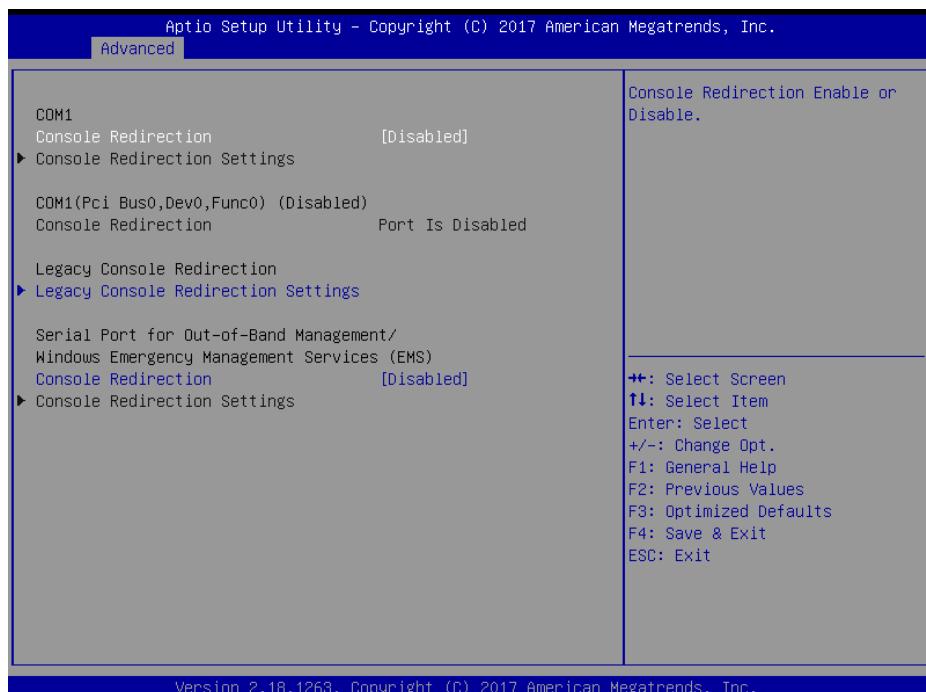

Item	Options	Description
Console Redirection	Disabled[Default], Enabled	Console Redirection Enable or Disable.

### 3.6.2.8.1 COM1

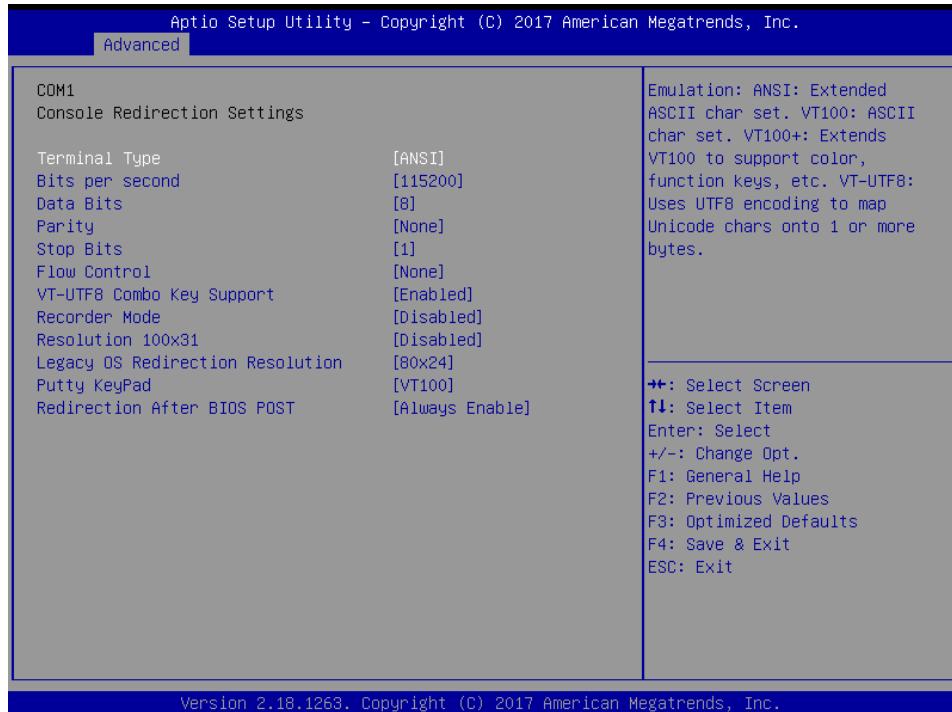



Item	Option	Description
Terminal Type	VT100 VT100+ VT-UTF8 ANSI[Default]	Emulation: ANSI: Extended ASCII char set. VT100: ASCII char set. VT100+: Extends VT100 to support color, function keys, etc. VT-UTF8: Uses UTF8 encoding to map Unicode chars onto 1 or more bytes.
Bits per second	9600 19200 38400 57600 115200[Default]	Select serial port transmission speed. The speed must be matched on the other side. Long or noisy lines may require lower speeds.
Data Bits	7 8[Default]	Data Bits.
Parity	None[Default] Even Odd Mark Space	A parity bit can be sent with the data bits to detect some transmission errors. Even: parity bit is 0 if the num of 1's in the data bits is even. Odd: parity bit is 0 if num of 1's in the data bits is odd. Mark: parity bit is always 1. Space: Parity bit is always 0. Mark and Space Parity do not allow for error detection. They can be used as an additional data bit.
Stop Bits	1[Default] 2	Stop bits indicate the end of a serial data packet. (A start bit indicates the beginning). The standard setting is 1 stop bit. Communication

## Quick Reference Guide

		with slow devices may require more than 1 stop bit.
<b>Flow Control</b>	None[ <b>Default</b> ] Hardware RTS/CTS	Flow control can prevent data loss from buffer overflow. When sending data, if the receiving buffers are full, a 'stop' signal can be sent to stop the data flow. Once the buffers are empty, a 'start' signal can be sent to re-start the flow. Hardware flow control uses two wires to send start/stop signals.
<b>VT-UTF8 Combo Key Support</b>	Disabled Enabled[ <b>Default</b> ]	Enable VT-UTF8 Combination Key Support for ANSI/VT100 terminals.
<b>Recorder Mode</b>	Disabled[ <b>Default</b> ] Enabled	With this mode enabled only text will be sent. This is to capture Terminal data.
<b>Resolution 100x31</b>	Disabled[ <b>Default</b> ] Enabled	Enables or disables extended terminal resolution.
<b>Legacy OS Redirection Resolution</b>	80x24[ <b>Default</b> ] 80x25	On Legacy OS, the Number of Rows and Columns supported redirection.
<b>Putty KeyPad</b>	VT100[ <b>Default</b> ] LINUX XTERMR6 SCO ESCN VT400	Select FunctionKey and KeyPad on Putty.
<b>Redirection After BIOS POST</b>	Always Enable[ <b>Default</b> ] Boot Loader	When Bootloader is selected, then Legacy Console Redirection is disabled before booting to legacy OS. When Always Enabled is selected, then Legacy Console Redirection is enabled for legacy OS. Default setting for this option is set to Always Enable.

### 3.6.2.9 CPU Configuration


Use the CPU configuration menu to view detailed CPU specification and configure the CPU.

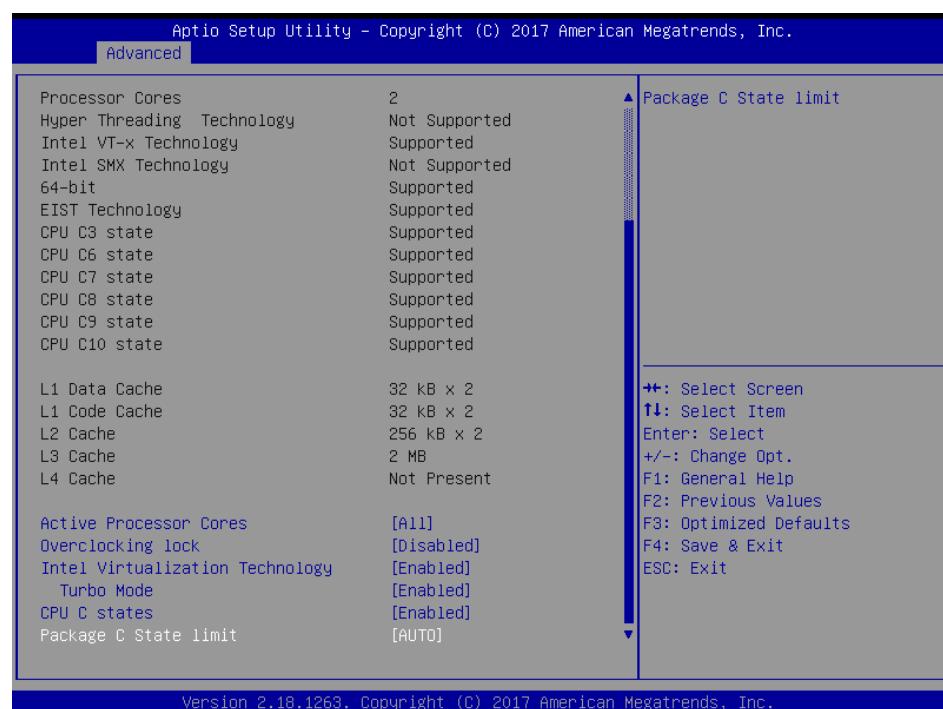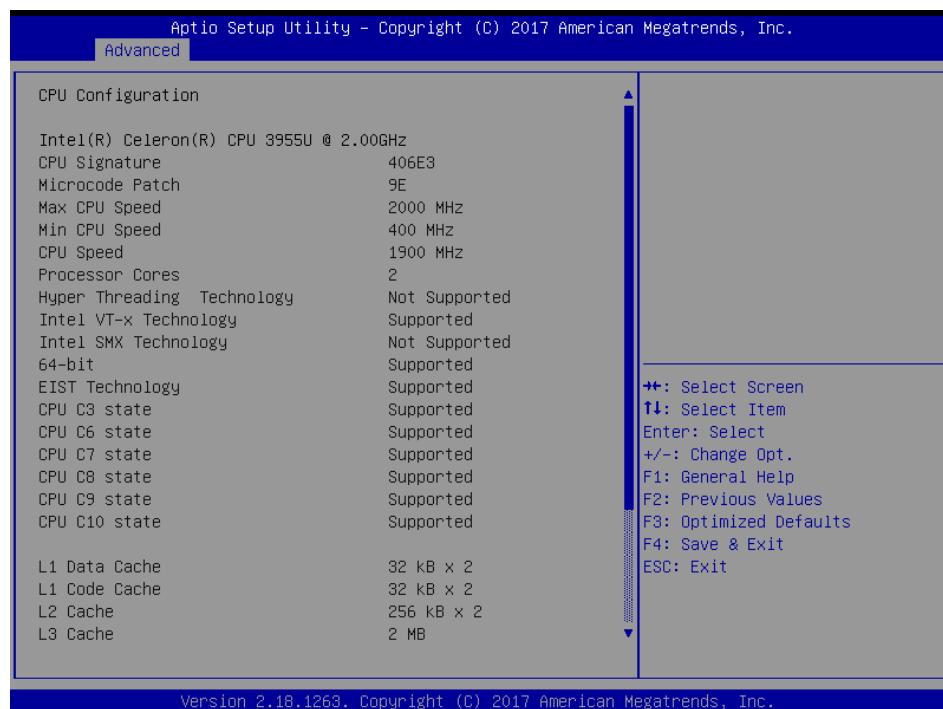


Item	Options	Description
<b>Active Processor Cores</b>	All [Default] 1	Number of cores to enable in each processor package.

<b>Overclocking lock</b>	Disabled[ <b>Default</b> ], Enabled	FLEX_RATIO(194) MSR.
<b>Intel Virtualization Technology</b>	Disabled, Enabled[ <b>Default</b> ]	When enabled, a VMM can utilize the additional hardware capabilities provided by Virtualization Technology.
<b>Turbo Mode</b>	Disabled, Enabled[ <b>Default</b> ]	Turbo Mode.
<b>CPU C states</b>	Disabled, Enabled[ <b>Default</b> ]	Enable or disable CPU states.
<b>Package C State limit</b>	C0/C1 C2 C3 C6 C7 C7s C8 C9 C10 Auto[ <b>Default</b> ]	Package C State limit.

### 3.6.2.10 Intel TXT Information

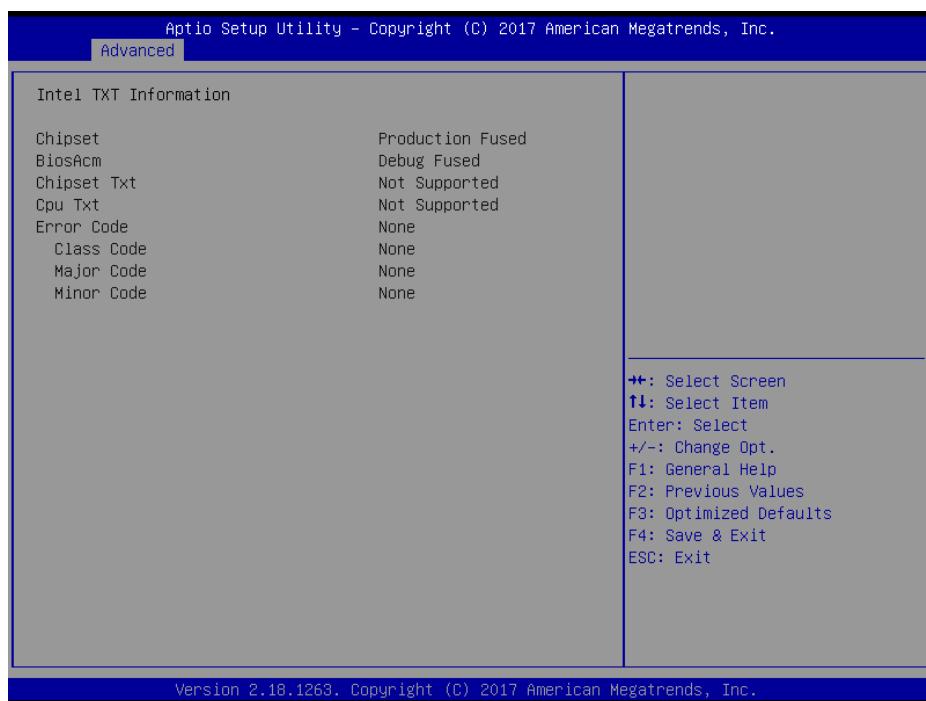


### 3.6.2.11 SATA Configuration

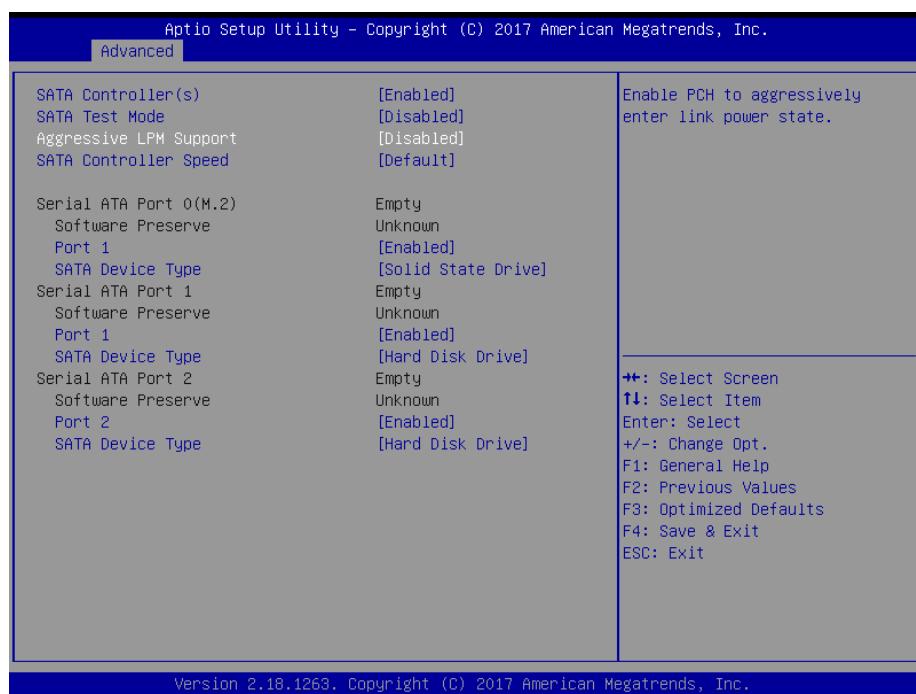


Item	Options	Description
<b>SATA Controller(s)</b>	Disabled, Enabled[ <b>Default</b> ]	Enable or disable SATA Device.
<b>SATA Test Mode</b>	Disabled[ <b>Default</b> ], Enabled	Test Mode Enable/Disable (Loop Back).
<b>Aggressive LPM Support</b>	Disabled[ <b>Default</b> ], Enabled	Enable PCH to aggressively enter link power state.
<b>SATA Controller Speed</b>	Default[ <b>Default</b> ] Gen1 Gen2 Gen3	Indicates the maximum speed the SATA controller can support.
<b>Port1/2</b>	Disabled, Enabled[ <b>Default</b> ]	Enable/Disable SATA Port.
<b>SATA Device Type</b>	Hard Disk Drive Solid State Drive[ <b>Default</b> ]	Identify the SATA port is connected to Solid State Drive or Hard Disk Drive.

### 3.6.2.12 Network Stack Configuration

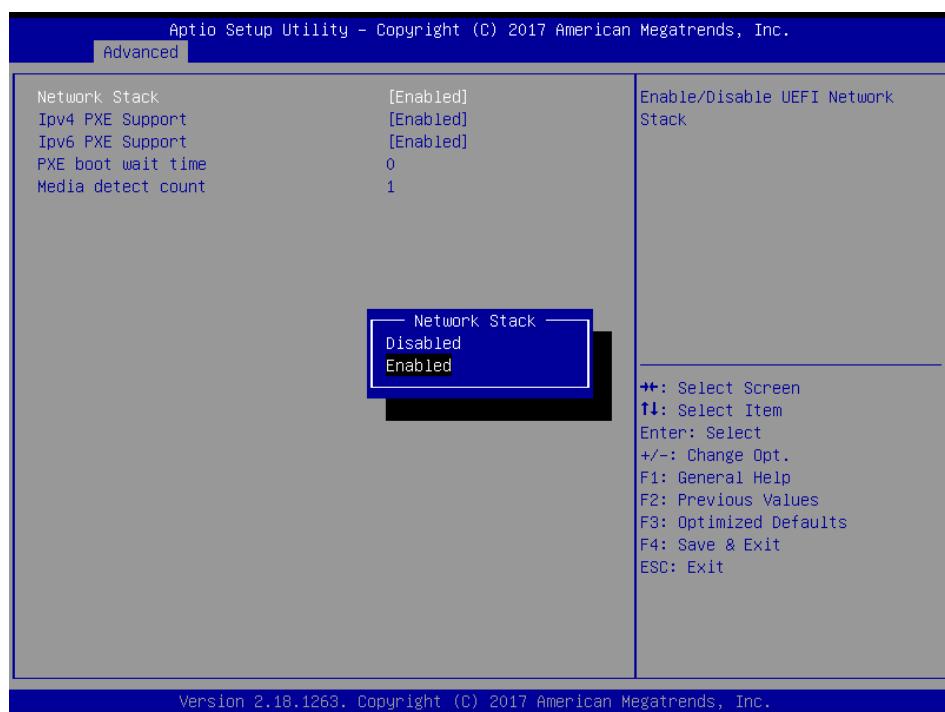


Item	Options	Description
<b>Network Stack</b>	Enabled Disabled <b>[Default]</b>	Enable/Disable UEFI Network Stack.
<b>Ipv4 PXE Support</b>	Disabled Enabled <b>[Default]</b>	Enable Ipv4 PXE Boot Support. If disabled IPV4 PXE boot option will not be created.
<b>Ipv6 PXE Support</b>	Disabled Enabled <b>[Default]</b>	Enable Ipv6 PXE Boot Support. If disabled IPV6 PXE boot option will not be created.
<b>PXE boot wait time</b>	0	Wait time to press ESC key to abort the PXE boot.
<b>Media detect count</b>	1	Number of times presence of media will be checked.

### 3.6.2.13 CSM Configuration

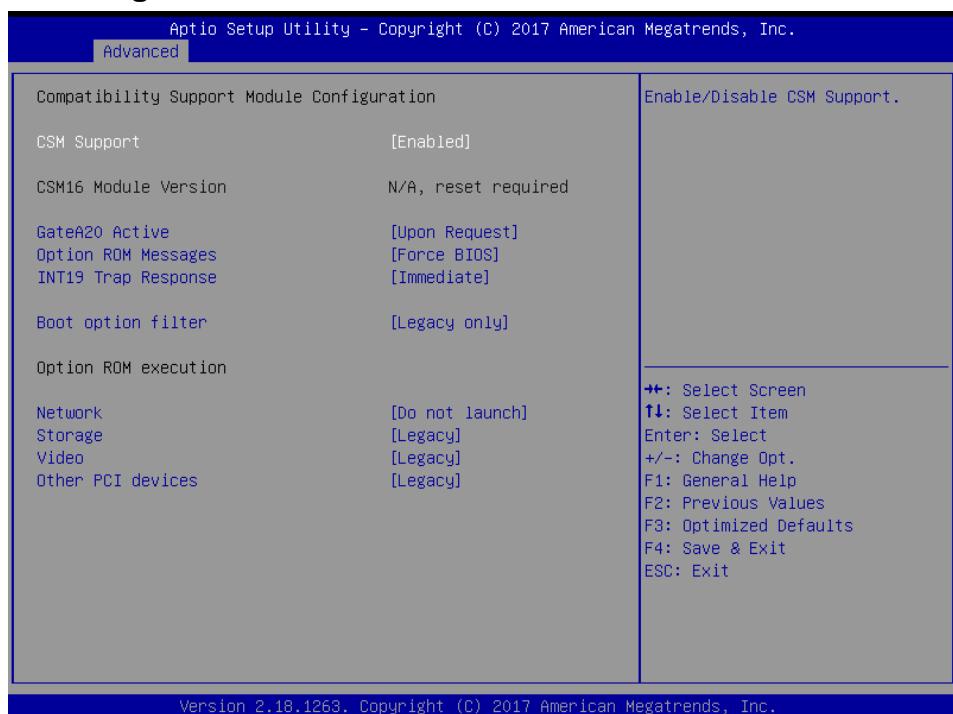

Item	Options	Description
<b>CSM Support</b>	Enabled[ <b>Default</b> ] Disabled,	Enable/Disable CSM Support.
<b>GateA20 Active</b>	Upon Request[ <b>Default</b> ] Always	UPON REQUEST – GA20 can be disabled using BIOS services. ALWAYS – do not allow disabling GA20; this option is useful when any RT code is executed above 1MB.
<b>Option ROM Messages</b>	Force BIOS[ <b>Default</b> ] Keep Current	Set display mode for Option ROM.
<b>INT19 Trap Response</b>	Immediate[ <b>Default</b> ] Postponed	BIOS reaction on INT19 trapping by Option ROM: IMMEDIATE – execute the trap right away; POSTONED – execute the trap during legacy boot.
<b>Boot option filter</b>	UEFI and Legacy Legacy only[ <b>Default</b> ] UEFI only	This option controls Legacy/UEFI ROMs priority.
<b>Network</b>	Do not launch[ <b>Default</b> ] UEFI Legacy	Controls the execution of UEFI and Legacy PXE OpROM.
<b>Storage</b>	Do not launch UEFI Legacy[ <b>Default</b> ]	Controls the execution of UEFI and Legacy Storage OpROM.
<b>Video</b>	Do not launch UEFI Legacy[ <b>Default</b> ]	Controls the execution of UEFI and Legacy Video OpROM.
<b>Other PCI devices</b>	Do not launch UEFI Legacy[ <b>Default</b> ]	Determines OpROM execution policy for devices other than Network, Storage, or Video.


### 3.6.2.14 SDIO Configuration

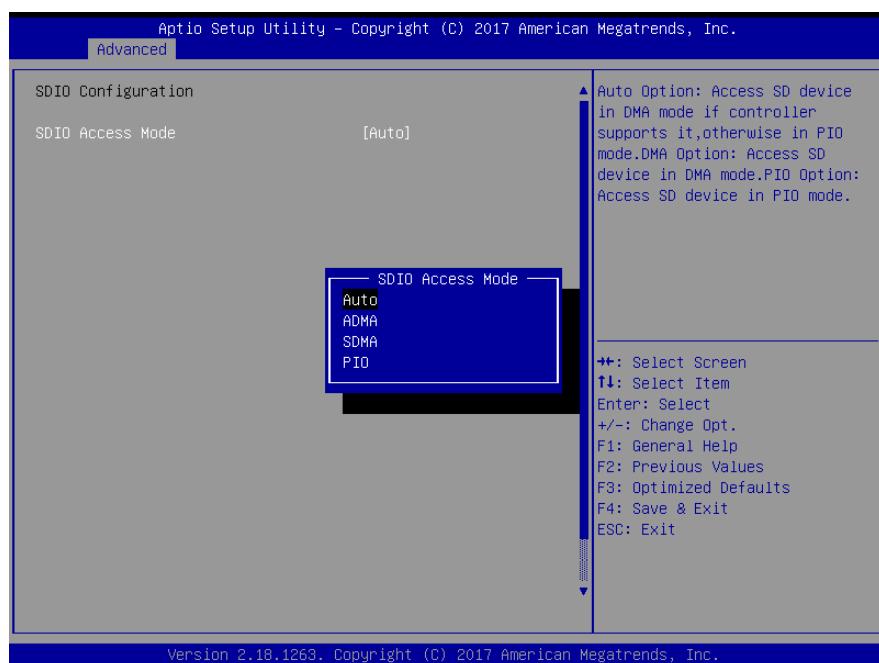

Item	Options	Description
<b>SDIO Access Mode</b>	Auto[ <b>Default</b> ] ADMA SDMA PIO	Auto Option: Access SD device in DMA mode if controller supports it, otherwise in PIO mode. DMA Option: Access SD device in DMA mode. PIO Option: Access SD device in PIO mode.


### 3.6.2.15 USB Configuration

The USB Configuration menu helps read USB information and configures USB settings.

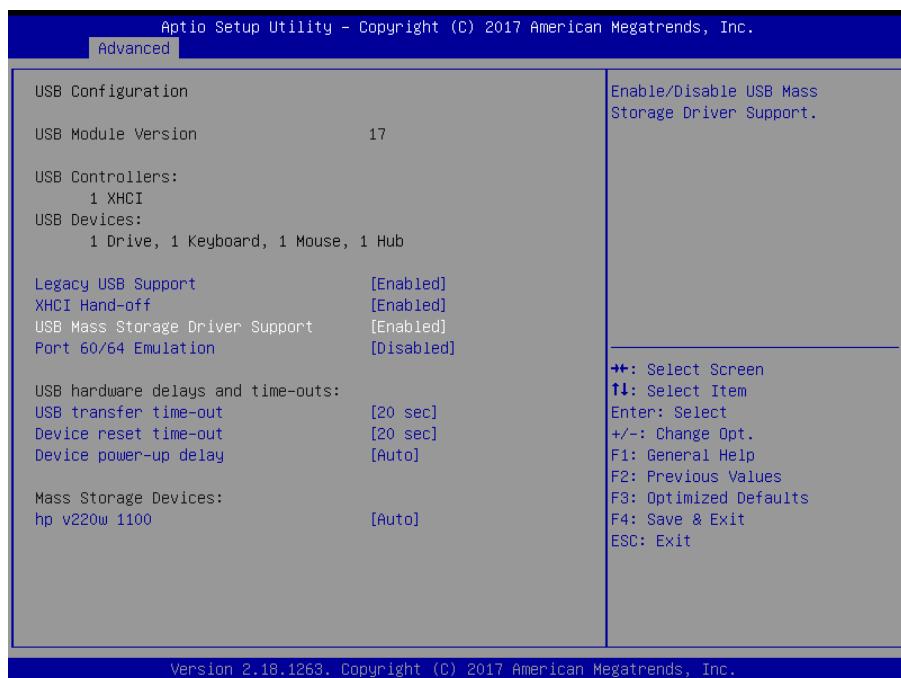

Item	Options	Description
<b>Legacy USB Support</b>	Enabled[ <b>Default</b> ] Disabled Auto	Enables Legacy USB support. AUTO option disables legacy support if no USB devices are connected. DISABLE option will keep USB devices available only for EFI applications.
<b>XHCI Hand-off</b>	Enabled[ <b>Default</b> ] Disabled	This is a workaround for OSes without XHCI hand-off support. The XHCI ownership change should be claimed by XHCI driver.
<b>USB Mass Storage Driver Support</b>	Enabled[ <b>Default</b> ] Disabled	Enable/Disable USB Mass Storage Driver Support.
<b>Port 60/64 Emulation</b>	Enabled Disabled[ <b>Default</b> ]	Enables I/O port 60h/64h emulation support. This should be enabled for the complete USB keyboard legacy support for non-USB aware OSes.
<b>USB transfer time-out</b>	1 sec 5 sec 10 sec 20 sec[ <b>Default</b> ]	The time-out value for Control, Bulk, and Interrupt transfers.
<b>Device reset time-out</b>	10 sec 20 sec[ <b>Default</b> ] 30 sec 40 sec	USB mass storage device Start Unit command time-out.
<b>Device power-up delay</b>	Auto[ <b>Default</b> ] Manual	Maximum time the device will take before it properly reports itself to the Host Controller. ‘Auto’ uses default value: for a Root port it is 100ms, for a Hub port the delay is taken from Hub descriptor.
<b>Mass Storage Devices</b>	Auto[ <b>Default</b> ] Floppy Forced FDD Hard Disk CD-ROM	Mass storage device emulation type. ‘AUTO’ enumerates devices according to their media format. Optical drives are emulated as ‘CDROM’, drives with no media will be emulated according to a drive type.

### 3.6.3 Chipset

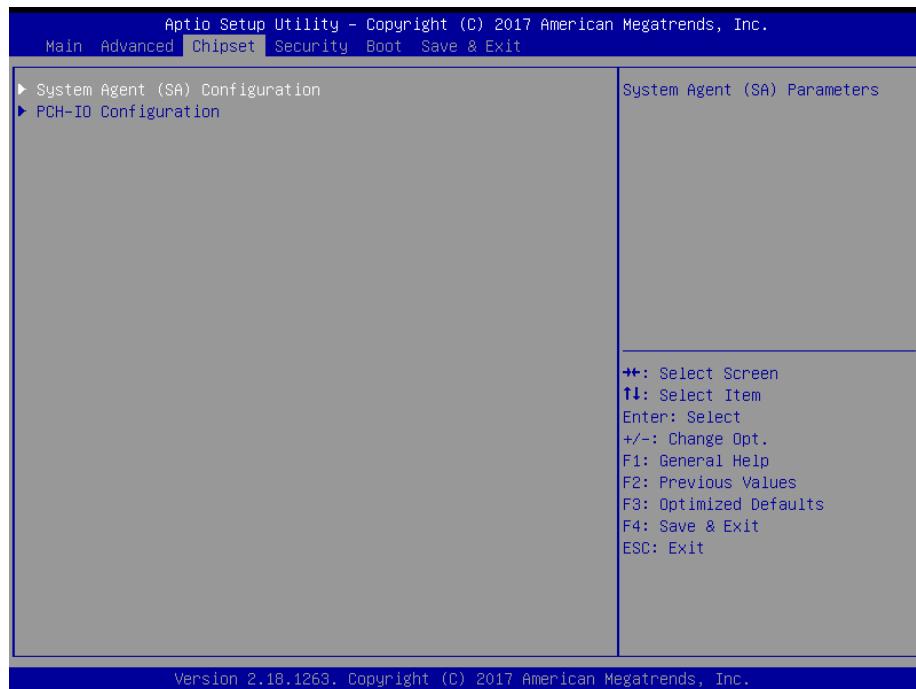


#### 3.6.3.1 System Agent (SA) Configuration




Item	Option	Description
VT-d	Enabled[ <b>Default</b> ] Disabled	VT-d capability.

### 3.6.3.1.1 Graphics Configuration

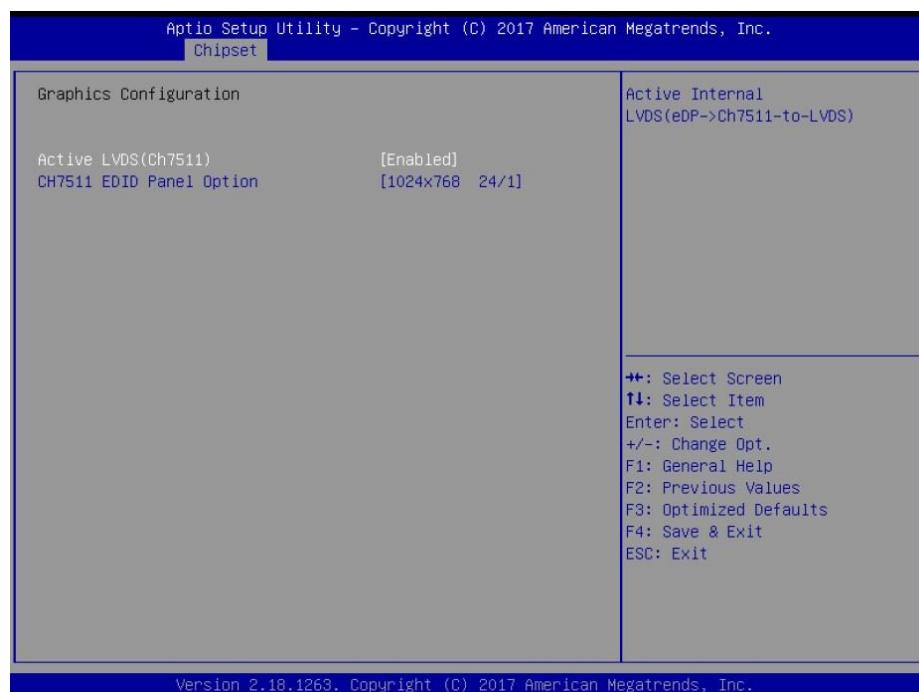


Item	Option	Description
<b>Active LVDS(CH7511)</b>	Enabled <b>[Default]</b> Disabled	Active Internal LVDS(eDP->Ch7511-to-LVDS).
<b>CH7511 EDID Panel Option</b>	1024x768 24/1 800x600 18/1 1024x768 18/1 1366x768 18/1 1024x600 18/1 1280x800 18/1 1920x1200 24/2 1920x1080 18/2 <b>1280x1024 24/2<b>[Default]</b></b> 1440x900 18/2 1600x1200 24/2 1366x768 24/1 1920x1080 24/2 1680x1050 24/2	Port1-EDP to LVDS (Chrotel 7511) Panel EDID Option.

### 3.6.3.1.2 Memory Configuration

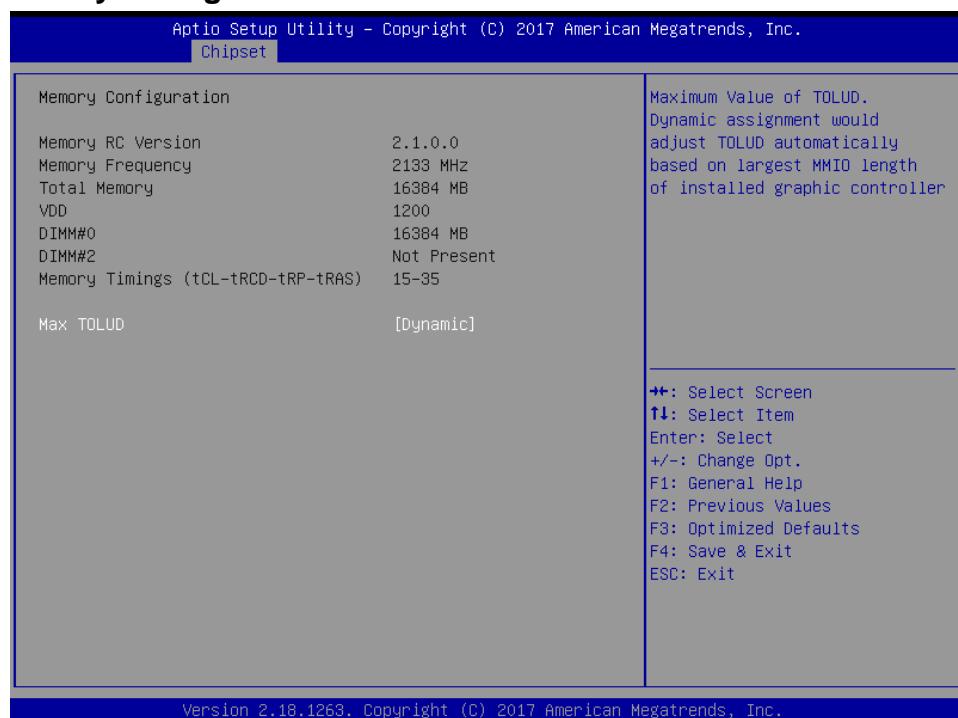


Item	Option	Description
<b>Max TOLUD</b>	Dynamic[ <b>Default</b> ] /1GB/1.25GB/1.5GB/1.75GB /2GB/2.25GB/2.5GB/2.75GB	Maximum Value of TOLUD. Dynamic assignment would adjust TOLUD automatically based on largest MMIO length of installed graphic controller.

### 3.6.3.2 PCH-IO Configuration

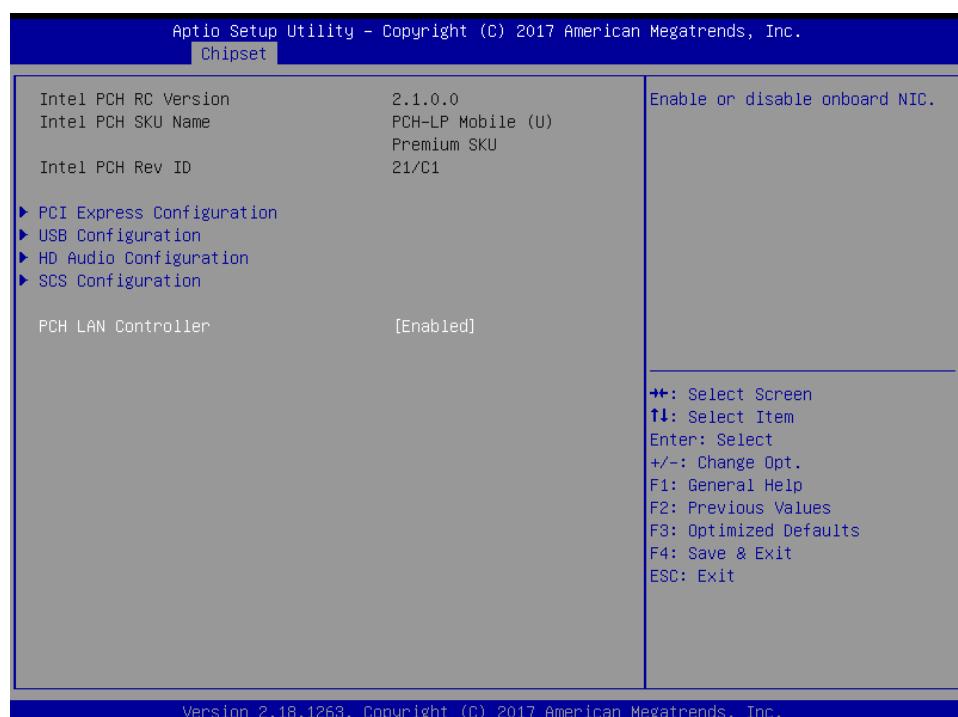


Item	Option	Description
PCH LAN Controller	Disabled Enabled[Default]	Enable or disable onboard NIC.

### 3.6.3.2.1 PCI Express Configuration

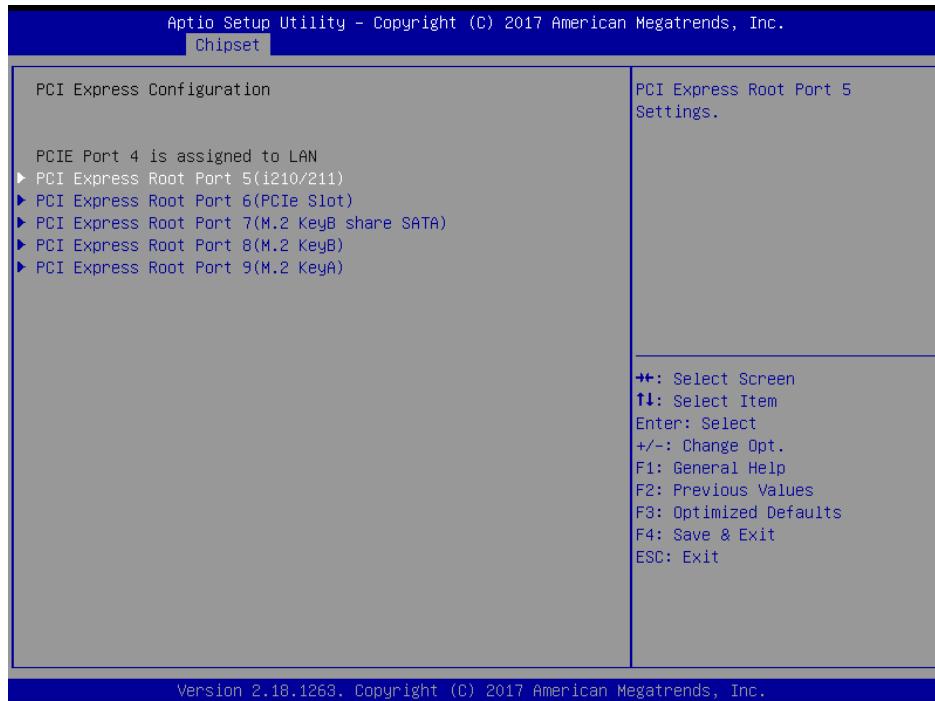


#### 3.6.3.2.1.1 PCI Express Root Port 5 (i210/211)

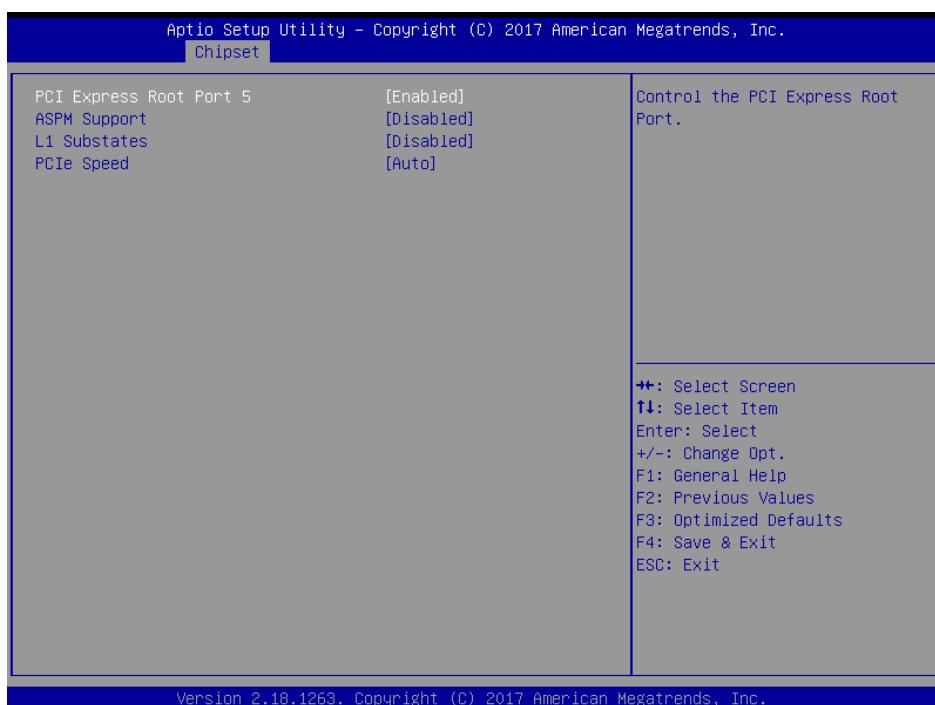

Item	Option	Description
<b>PCI Express Root Port 5</b>	Enabled[ <b>Default</b> ], Disabled	Control the PCI Express Root Port.
<b>ASPM Support</b>	Disabled[ <b>Default</b> ]  L0s L1 L0sL1 Auto,	Set the ASPM Level: Force L0s – Force all links to L0s State AUTO – BIOS auto configure DISABLE – Disables ASPM.
<b>L1 Substates</b>	Disabled[ <b>Default</b> ]  L1.1 L1.2 L1.1 & L1.2,	PCI Express L1 Substates settings.
<b>PCIe Speed</b>	Auto[ <b>Default</b> ]  Gen1 Gen2 Gen3	Select PCI Express port speed.


### 3.6.3.2.1.2 PCI Express Root Port 6 (PCIe Slot)

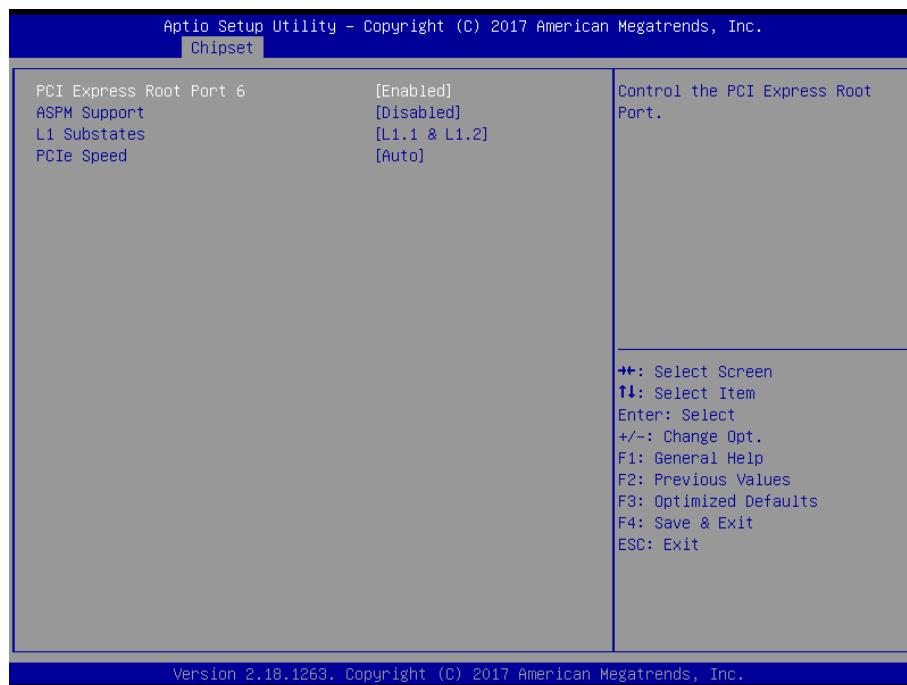

Item	Option	Description
<b>PCI Express Root Port 6</b>	Enabled[ <b>Default</b> ], Disabled	Control the PCI Express Root Port.
<b>ASPM Support</b>	Disabled[ <b>Default</b> ]  L0s L1 L0sL1 Auto,	Set the ASPM Level: Force L0s – Force all links to L0s State AUTO – BIOS auto configure DISABLE – Disables ASPM.
<b>L1 Substates</b>	Disabled L1.1	PCI Express L1 Substates settings.


	L1.2 L1.1 & L1.2[Default]	
PCIe Speed	Auto[Default] Gen1 Gen2 Gen3	Select PCI Express port speed.

### 3.6.3.2.1.3 PCI Express Root Port 7 (M.2 KeyB share SATA)

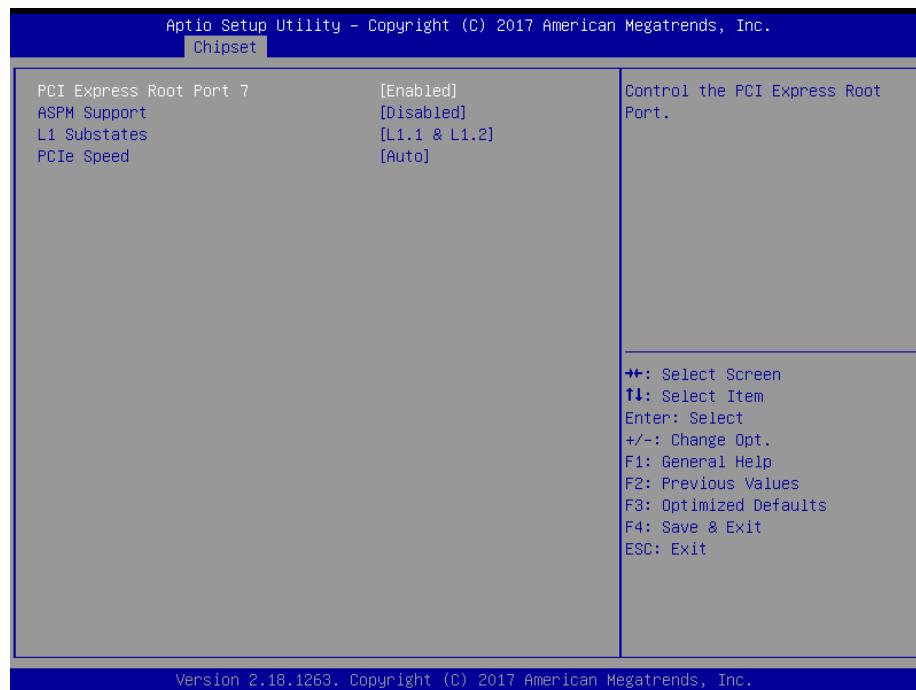


Item	Option	Description
PCI Express Root Port 7	Enabled[Default], Disabled	Control the PCI Express Root Port.
ASPM Support	Disabled[Default] L0s L1 L0sL1 Auto,	Set the ASPM Level: Force L0s – Force all links to L0s State AUTO – BIOS auto configure DISABLE – Disables ASPM.
L1 Substates	Disabled L1.1 L1.2 L1.1 & L1.2[Default]	PCI Express L1 Substates settings.
PCIe Speed	Auto[Default] Gen1 Gen2 Gen3	Select PCI Express port speed.

### 3.6.3.2.1.4 PCI Express Root Port 8 (M.2 KeyB)

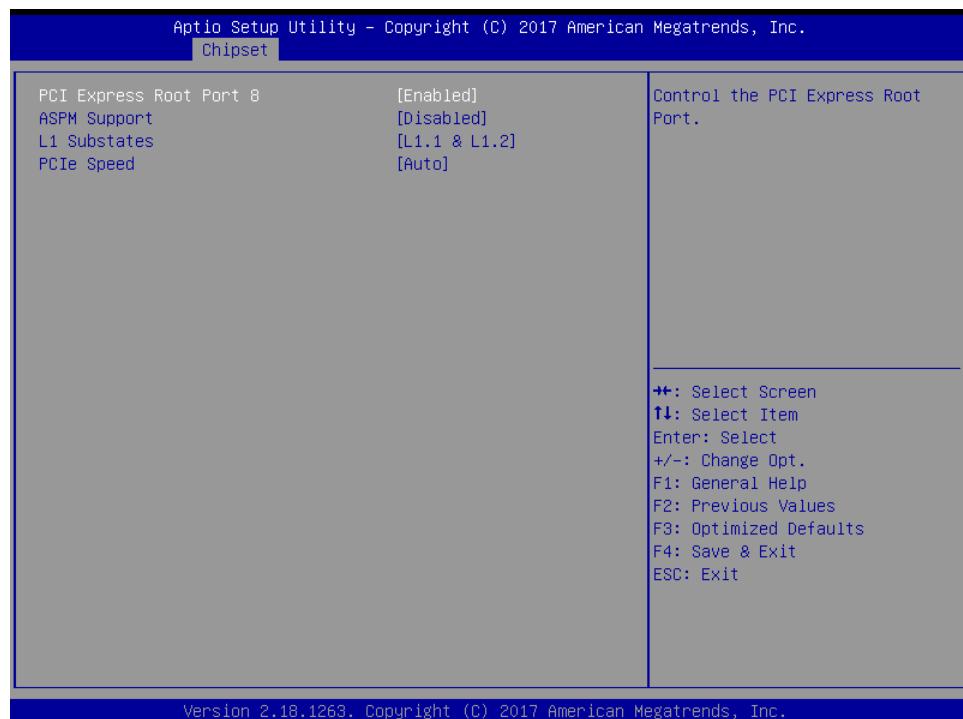


Item	Option	Description
<b>PCI Express Root Port 8</b>	Enabled[ <b>Default</b> ], Disabled	Control the PCI Express Root Port.
<b>ASPM Support</b>	Disabled[ <b>Default</b> ]  L0s L1 L0sL1 Auto,	Set the ASPM Level: Force L0s – Force all links to L0s State AUTO – BIOS auto configure DISABLE – Disables ASPM.
<b>L1 Substates</b>	Disabled  L1.1 L1.2  L1.1 & L1.2[ <b>Default</b> ]	PCI Express L1 Substates settings.
<b>PCIe Speed</b>	Auto[ <b>Default</b> ]  Gen1 Gen2 Gen3	Select PCI Express port speed.

### 3.6.3.2.1.5 PCI Express Root Port 9 (M.2 KeyA)

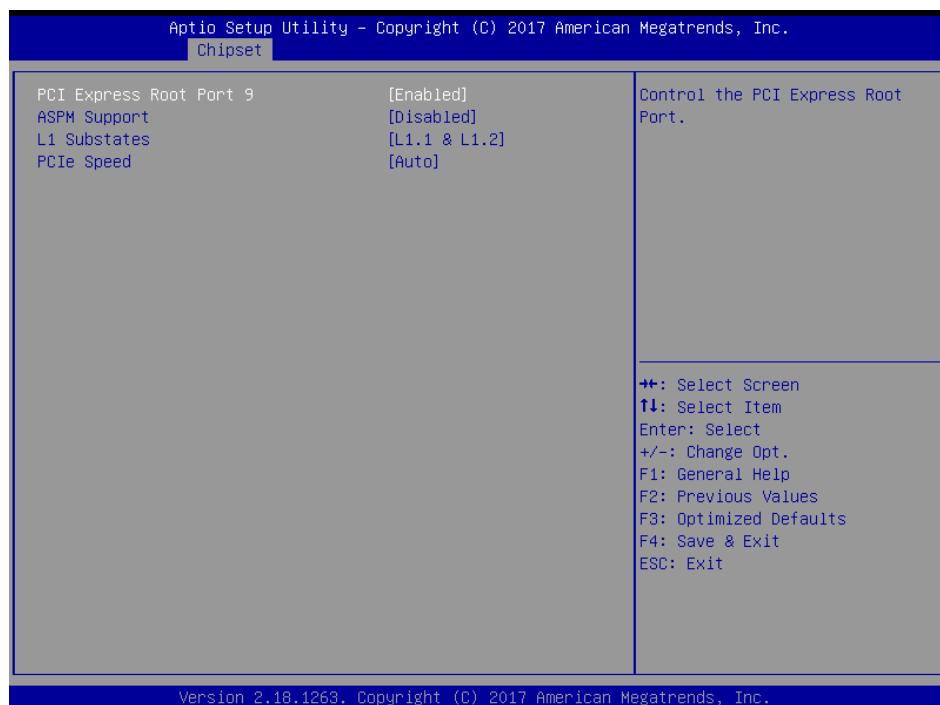


Item	Option	Description
<b>PCI Express Root Port 9</b>	Enabled[ <b>Default</b> ], Disabled	Control the PCI Express Root Port.
<b>ASPM Support</b>	Disabled[ <b>Default</b> ]  L0s L1 L0sL1 Auto,	Set the ASPM Level: Force L0s – Force all links to L0s State AUTO – BIOS auto configure DISABLE – Disables ASPM.
<b>L1 Substates</b>	Disabled  L1.1 L1.2  L1.1 & L1.2[ <b>Default</b> ]	PCI Express L1 Substates settings.
<b>PCIe Speed</b>	Auto[ <b>Default</b> ]  Gen1 Gen2 Gen3	Select PCI Express port speed.

### 3.6.3.2.2 USB Configuration

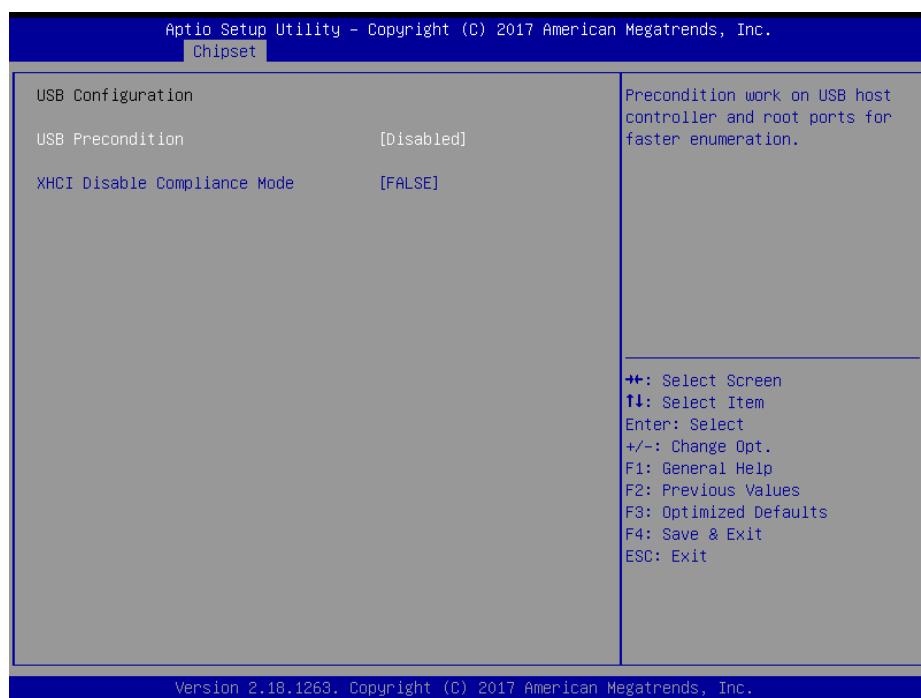


Item	Option	Description
<b>USB Precondition</b>	Enabled Disabled <b>[Default]</b> ,	Precondition work on USB host controller and root ports for faster enumeration.
<b>XHCI Disable Compliance Mode</b>	<b>FALSE[Default]</b> , TRUE	Option to disable Compliance Mode. Default is FALSE to not disable Compliance Mode. Set TRUE to disable Compliance Mode.

### 3.6.3.2.3 HD Audio Configuration

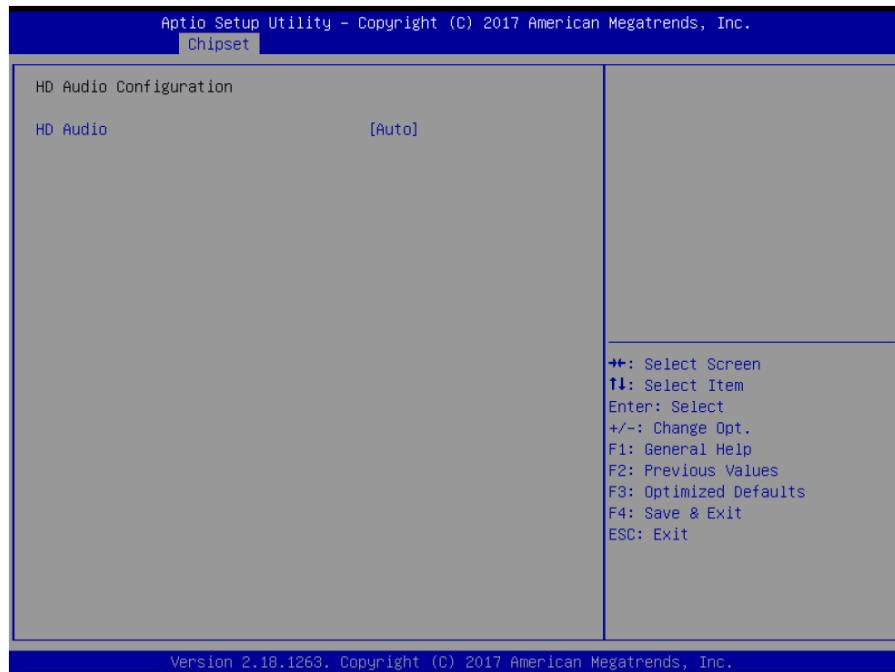

Item	Option	Description
<b>HD Audio</b>	Disabled Enabled Auto[ <b>Default</b> ],	Control Detection of the HD-Audio device. Disable = HDA will be unconditionally disabled Enabled = HDA will be unconditionally enabled Auto = HDA will be enabled if present, disabled otherwise.

### 3.6.3.2.4 SCS Configuration

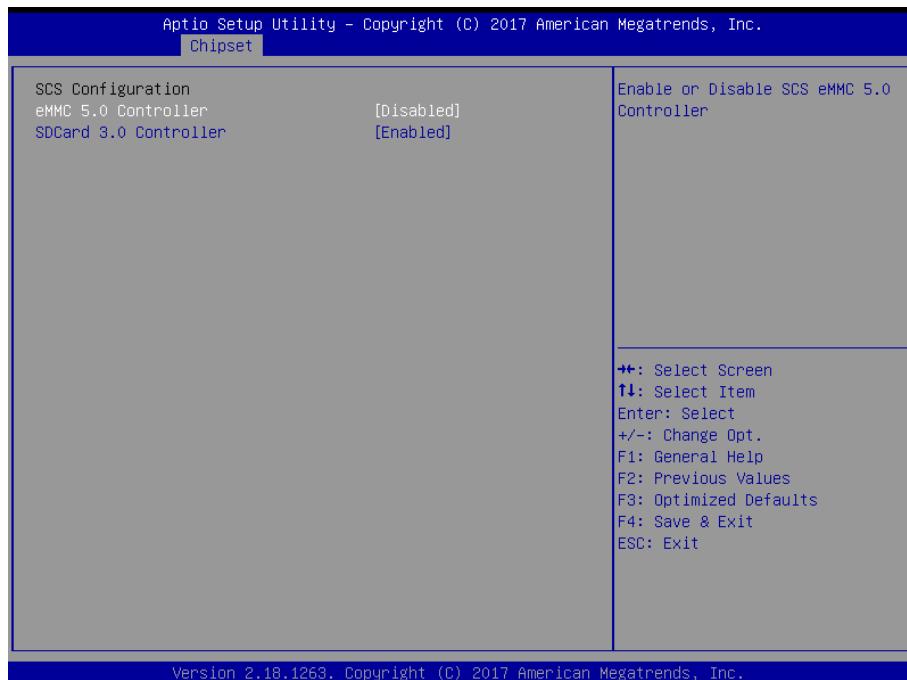

Item	Option	Description
<b>eMMC 5.0 Controller</b>	Disabled[ <b>Default</b> ] Enabled	Enable or Disable SCS eMMC 5.0 Controller.
<b>SDCard 3.0 Controller</b>	Disabled Enabled[ <b>Default</b> ]	Enable or Disable SCS SDHC 3.0 Controller.

### 3.6.4 Security




#### ● Administrator Password

Set setup Administrator Password

#### ● User Password


Set User Password

### 3.6.4.1 Secure Boot menu

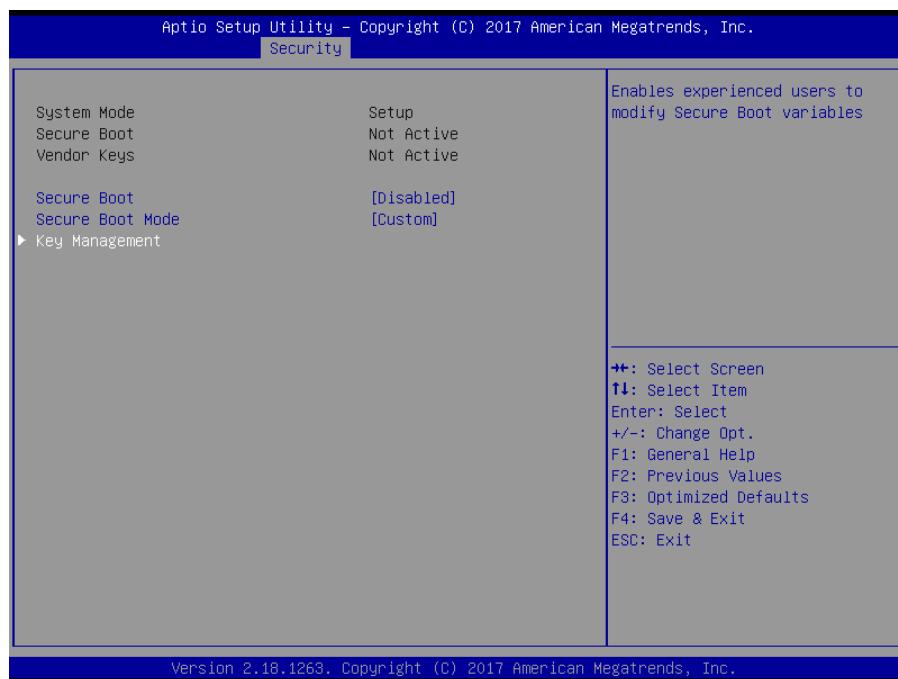


Item	Option	Description
<b>Secure Boot</b>	Disabled[ <b>Default</b> ] Enabled	Secure Boot can be enabled if 1.System running in User mode with enrolled Platform Key(PK) 2.CSM function is disabled.
<b>Secure Boot Mode</b>	Standard Custom[ <b>Default</b> ]	Secure Boot mode selector. 'Custom' Mode enables users to change Image Execution policy and manage Secure Boot Keys.

### 3.6.4.1.1 Key Management

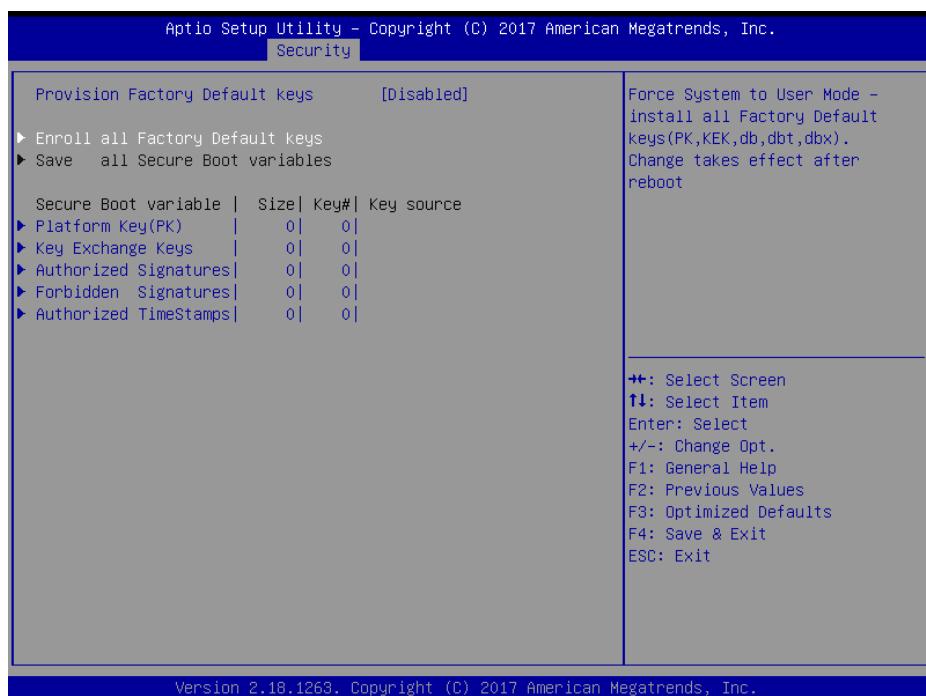

Item	Option	Description
<b>Provision Factory Default keys</b>	Disabled[ <b>Default</b> ] Enabled	Install factory default Secure Boot keys when System is in Setup Mode.


### 3.6.5 Boot

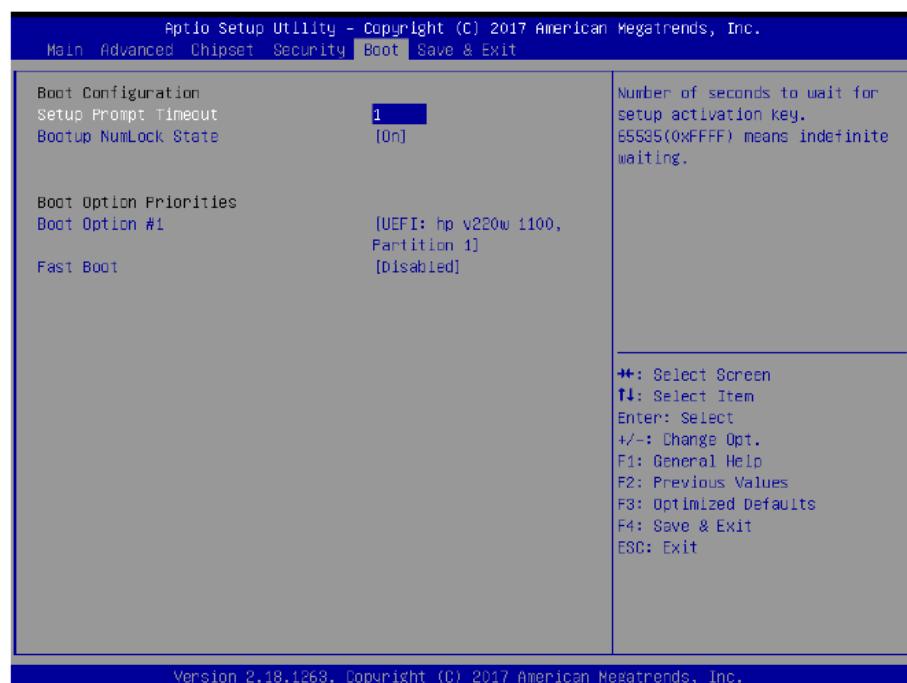

Item	Option	Description
<b>Setup Prompt Timeout</b>	1~ 65535	Number of seconds to wait for setup activation

		key. 65535(0xFFFF) means indefinite waiting.
<b>Bootup NumLock State</b>	On[ <b>Default</b> ] Off	Select the Keyboard NumLock state
<b>Fast Boot</b>	Disabled[ <b>Default</b> ] Enabled	Enables or disables boot with initialization of a minimal set of devices required to launch active boot option. Has no effect for BBS boot options.
<b>Boot Option #1</b>	Set the system boot order.	

### 3.6.6 Save and exit

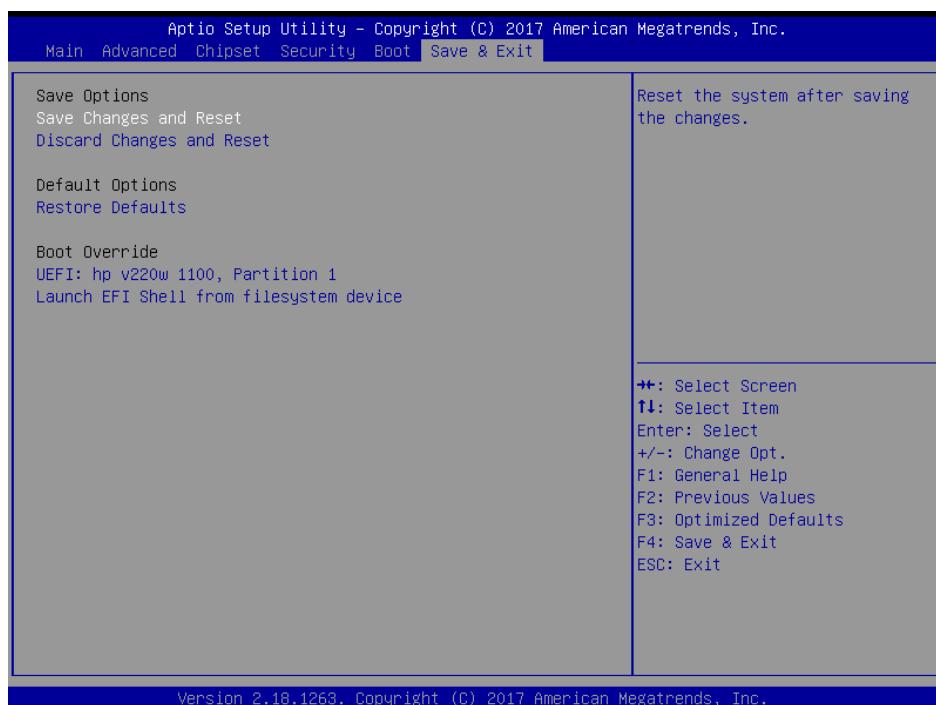

#### 3.6.6.1 Save Changes and Reset

Reset the system after saving the changes.

#### 3.6.6.2 Discard Changes and Reset

Reset system setup without saving any changes.

#### 3.6.6.3 Restore Defaults

Restore/Load Default values for all the setup options.

#### 3.6.6.4 Launch EFI Shell from filesystem device

Attempts to Launch EFI Shell application (Shell.efi) from one of the available filesystem devices.

